Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity		**359.3 cd per klm.**
(Luminaire orientation as tested.)		**0.0 degrees vertical**
		0.0 degrees horizontal
Beam Spread	**At 10% of Imax**	**164.9V x 164.8H**
	At 50% of Imax	**110.3V x 109.4H**
	At 90% of Imax	**29.8V x 24.7H**
Beam Flux	**Total**	**1000.3 lumens per klm.**
	To 10% of Imax	**975.5 lumens per klm.**
	To 50% of Imax	**677.7 lumens per klm.**
	To 90% of Imax	**60.4 lumens per klm.**
	Upward LOR	**0.9 %**
	Downward LOR	**99.1 %**
Luminaire Efficiency(Light Output Ratio)		**100.0 %**

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.17V I:0.7776A P:6.560W PF:0.6932 Freq:59.98Hz Lamp Flux:159.445x1 lm		
NAME: LED	TYPE:A9B1-7W-A	WEIGHT:
SPEC.:Large angle	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

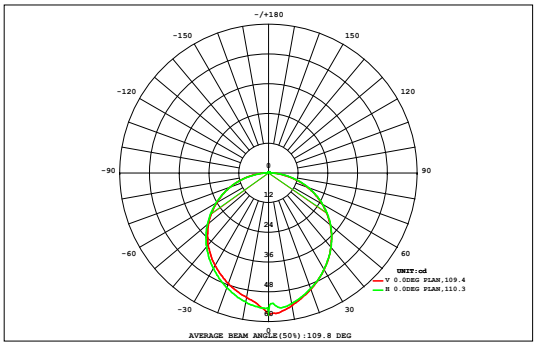

DATA OF LAMP		Eff:24.31lm/W	
MODEL	A9B1-7W-A	Imax(cd)	57.29
NOMINAL POWER(W)	7	AVAILABILITY(%)	97.5
RATED VOLTAGE(V)	12	Avai. FLUX(lm)	155.5
NOMINAL FLUX(lm)	159.445	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	159.4
TEST VOLTAGE(V)	12	θ @50%(H,V)	109,110DEG

AREA FLUX DIAGRAM UNIT:lm

VERTICAL(DEG)	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL(DEG) 20	30	40	50	60	70	80	90	Φ t	Φ a
90	0.00	0.01	0.03	0.05	0.07	0.09	0.11	0.12	0.13	0.13	0.12	0.10	0.08	0.06	0.04	0.02	0.01	0.00	1.18	0.33
80	0.01	0.03	0.06	0.12	0.18	0.25	0.31	0.35	0.38	0.38	0.35	0.31	0.25	0.18	0.12	0.06	0.02	0.00	3.36	3.14
70	0.01	0.04	0.11	0.20	0.31	0.42	0.52	0.59	0.64	0.64	0.60	0.52	0.42	0.31	0.20	0.10	0.04	0.01	5.67	5.60
60	0.01	0.05	0.15	0.28	0.43	0.58	0.71	0.82	0.87	0.87	0.82	0.72	0.58	0.43	0.28	0.15	0.05	0.01	7.82	7.78
50	0.01	0.07	0.19	0.35	0.53	0.72	0.89	1.01	1.08	1.09	1.02	0.90	0.73	0.54	0.35	0.19	0.07	0.01	9.72	9.70
40	0.01	0.08	0.22	0.40	0.62	0.83	1.03	1.18	1.27	1.27	1.19	1.04	0.85	0.63	0.41	0.22	0.08	0.01	11.3	11.3
30	0.01	0.09	0.24	0.45	0.68	0.92	1.14	1.31	1.42	1.43	1.33	1.16	0.94	0.70	0.46	0.24	0.09	0.01	12.6	12.6
20	0.01	0.10	0.26	0.47	0.73	0.98	1.22	1.41	1.54	1.56	1.45	1.25	1.01	0.75	0.49	0.26	0.10	0.01	13.6	13.6
10	0.01	0.10	0.26	0.49	0.75	1.01	1.25	1.45	1.61	1.65	1.52	1.30	1.05	0.77	0.50	0.27	0.10	0.01	14.1	14.1
0	0.01	0.10	0.26	0.49	0.75	1.01	1.25	1.45	1.60	1.65	1.51	1.30	1.05	0.77	0.50	0.27	0.10	0.01	14.1	14.1
-10	0.01	0.10	0.26	0.47	0.73	0.98	1.22	1.41	1.53	1.55	1.44	1.25	1.01	0.75	0.49	0.26	0.10	0.01	13.5	13.5
-30	0.01	0.09	0.24	0.44	0.68	0.92	1.14	1.31	1.41	1.42	1.33	1.16	0.94	0.70	0.45	0.24	0.09	0.01	12.6	12.6
-40	0.01	0.08	0.21	0.40	0.61	0.83	1.02	1.17	1.26	1.26	1.18	1.04	0.84	0.62	0.41	0.22	0.08	0.01	11.3	11.3
-50	0.01	0.07	0.18	0.34	0.52	0.71	0.88	1.00	1.07	1.08	1.01	0.89	0.72	0.53	0.35	0.19	0.07	0.01	9.63	9.60
-60	0.01	0.05	0.15	0.27	0.42	0.57	0.70	0.80	0.86	0.86	0.81	0.71	0.58	0.43	0.28	0.15	0.05	0.01	7.69	7.66
-70	0.01	0.04	0.10	0.20	0.30	0.41	0.51	0.58	0.62	0.62	0.58	0.51	0.41	0.30	0.20	0.10	0.04	0.01	5.53	5.46
-80	0.00	0.02	0.06	0.11	0.18	0.24	0.30	0.34	0.36	0.36	0.34	0.29	0.24	0.17	0.11	0.06	0.02	0.00	3.21	2.98
-90	0.00	0.01	0.03	0.04	0.06	0.08	0.09	0.10	0.11	0.11	0.10	0.09	0.07	0.06	0.04	0.02	0.01	0.00	1.04	0.21
Φ t	0.17	1.12	3.00	5.57	8.54	11.6	14.3	16.4	17.7	17.9	16.7	14.6	11.8	8.70	5.66	3.02	1.11	0.15	158	---
Φ a	0.04	0.97	2.85	5.43	8.40	11.4	14.1	16.3	17.6	17.8	16.6	14.4	11.6	8.56	5.52	2.88	0.96	0.04	---	155

one-half-peak spread: U:55.1,D:50.9 , L:54.6,R:52.6 **NEMA Beam Type: Type 7**

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:24 May 2022

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.17V I:0.7776A P:6.560W PF:0.6932 Freq:59.98Hz Lamp Flux:159.445x1 lm		
NAME: LED	TYPE:A9B1-7W-A	WEIGHT:
SPEC.:Large angle	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

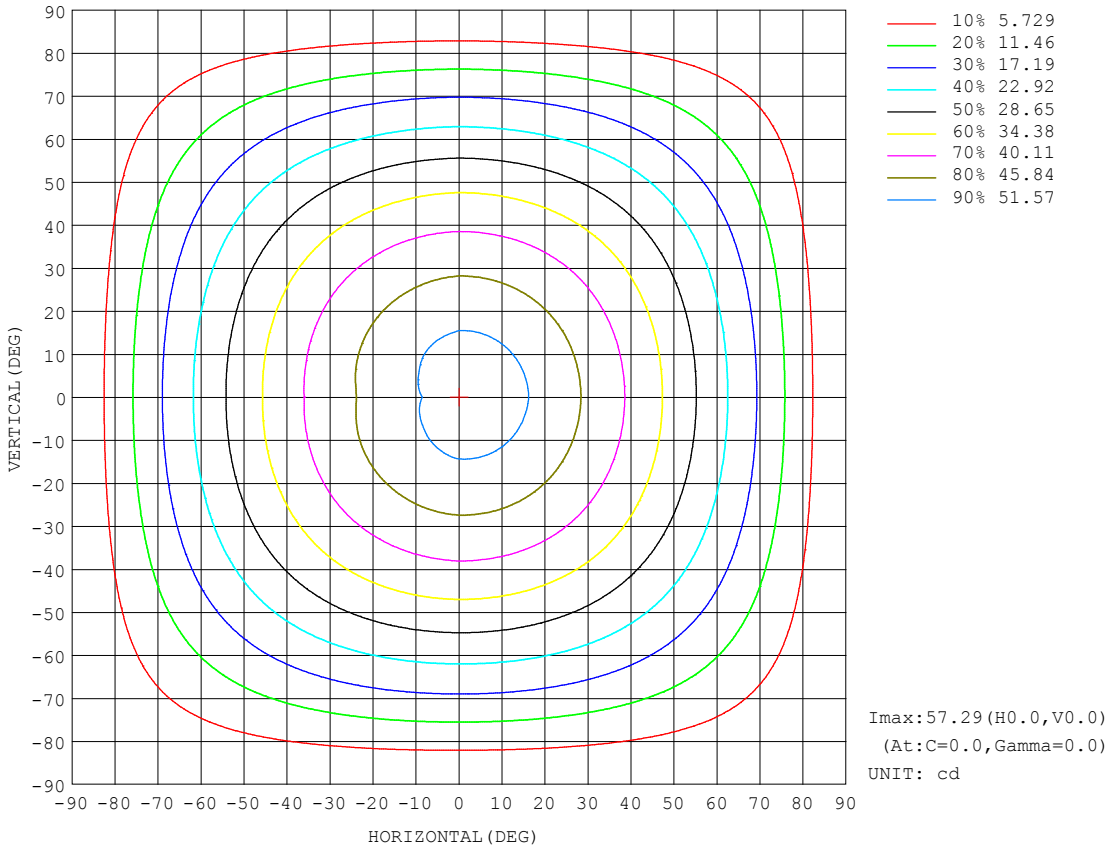

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:24 May 2022

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:12.17V I:0.7776A P:6.560W PF:0.6932 Freq:59.98Hz Lamp Flux:159.445x1 lm		
NAME: LED	TYPE:A9B1-7W-A	WEIGHT:
SPEC.:Large angle	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

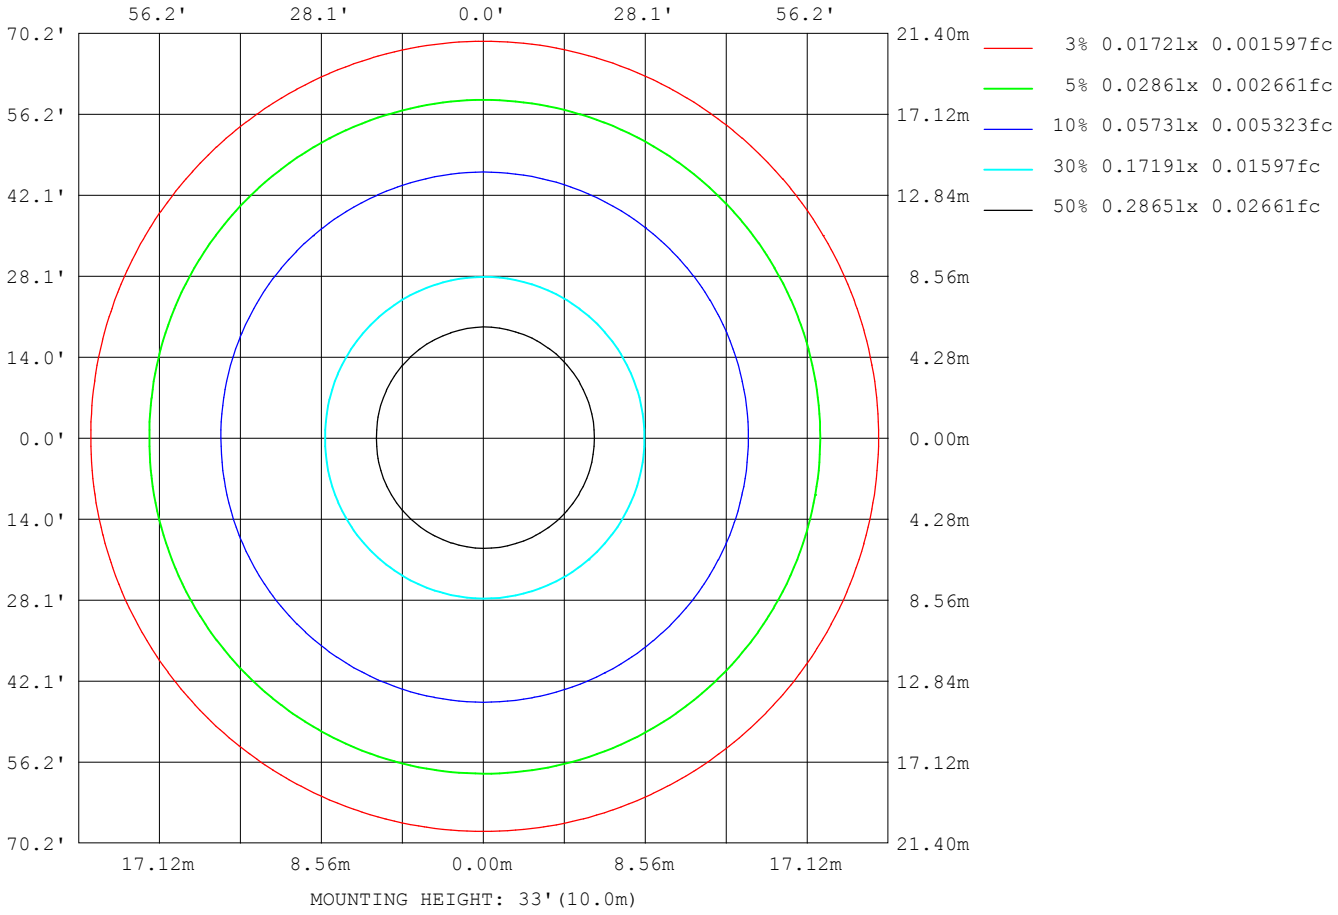

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:24 May 2022

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

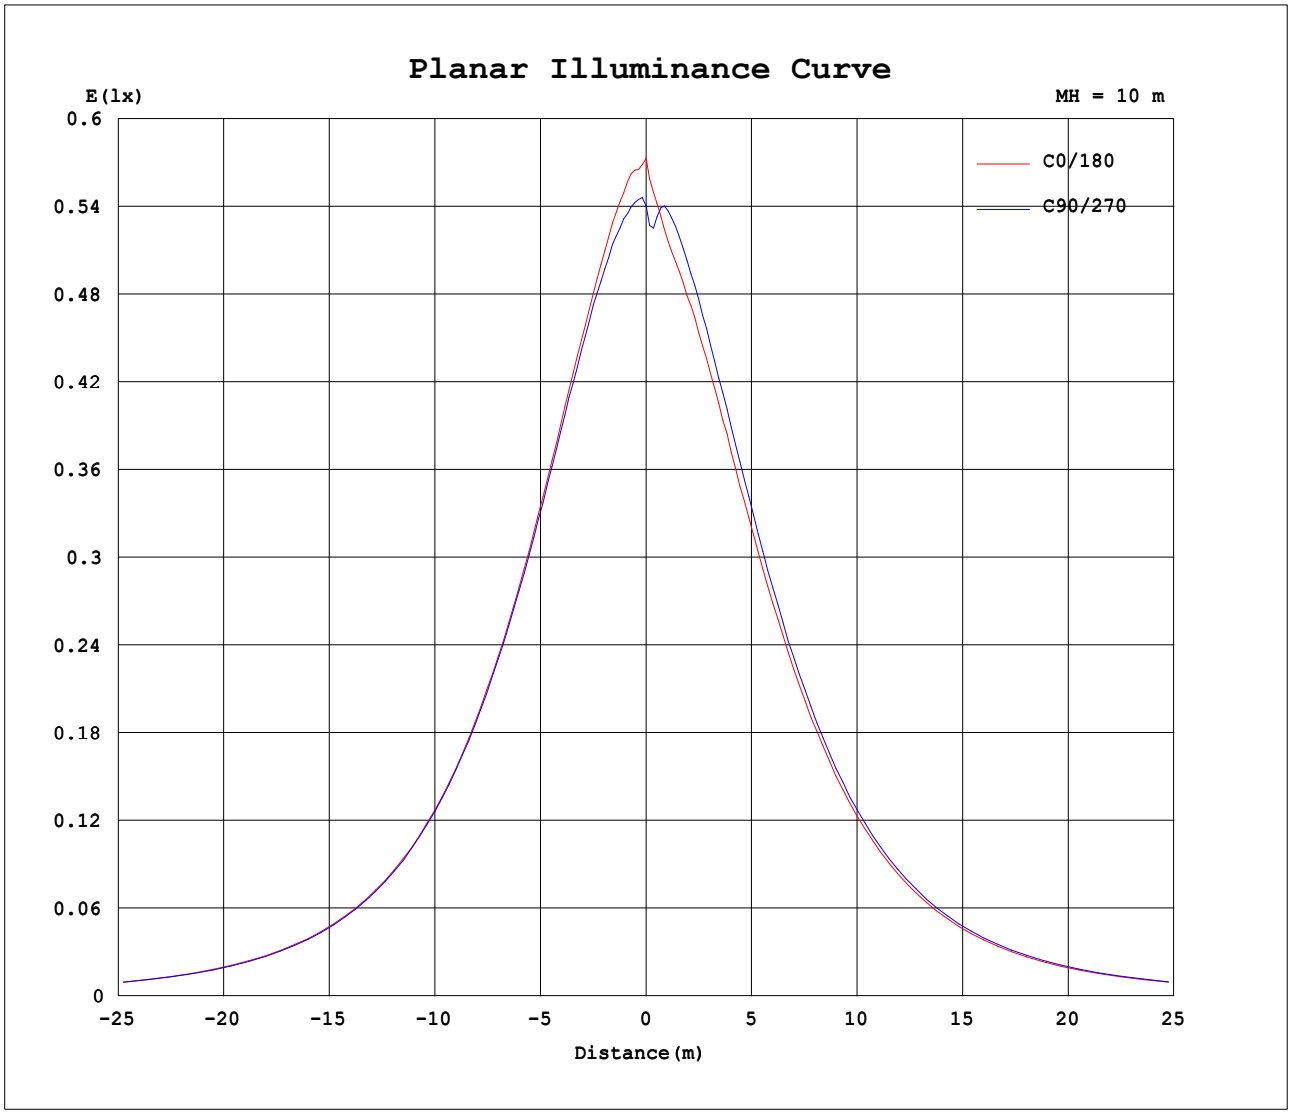

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:24 May 2022

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.17V I:0.7776A P:6.560W PF:0.6932 Freq:59.98Hz Lamp Flux:159.445x1 lm		
NAME: LED	TYPE:A9B1-7W-A	WEIGHT:
SPEC.:Large angle	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Flux out:108.0 lm

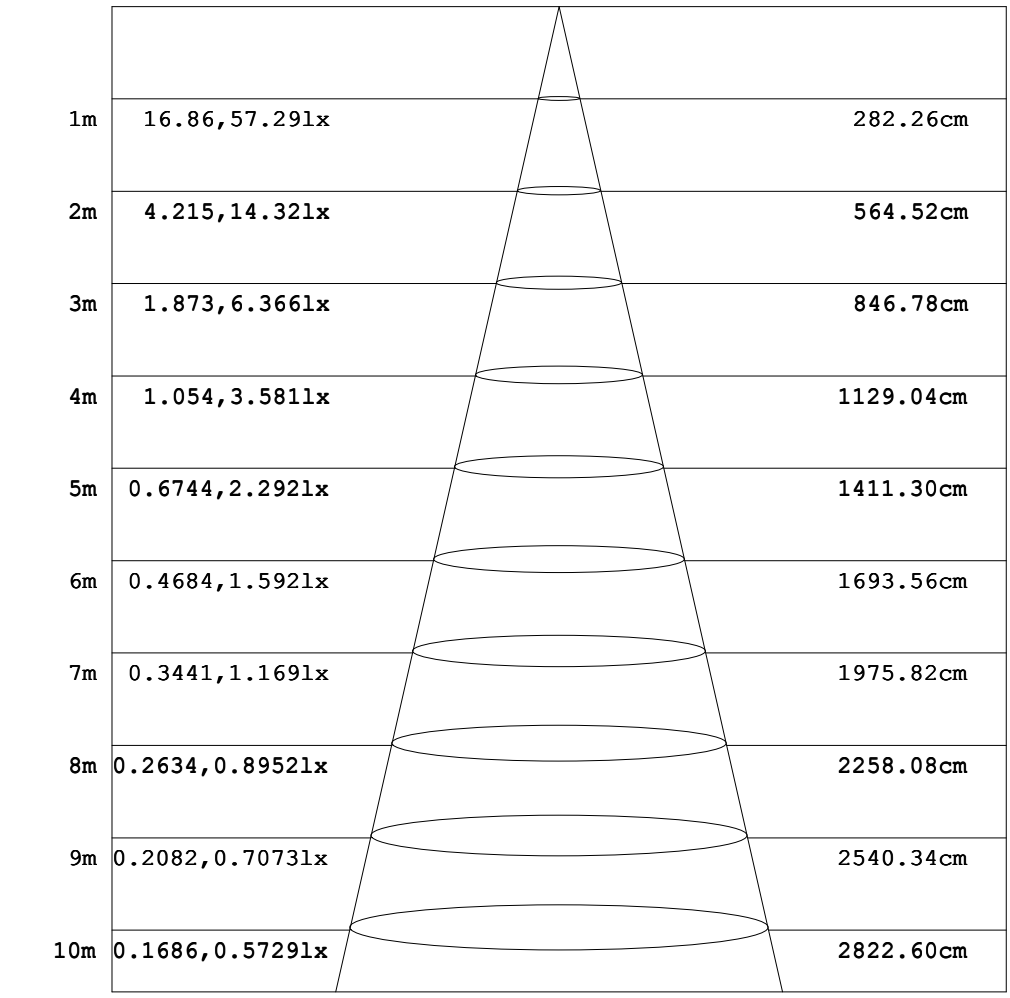

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:24 May 2022

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.17V I:0.7776A P:6.560W PF:0.6932 Freq:59.98Hz Lamp Flux:159.445x1 lm		
NAME: LED	TYPE:A9B1-7W-A	WEIGHT:
SPEC.:Large angle	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1 UNIT: cd

H(DEG) / V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	1.13	0.27	0.15	0.15	0.02	0.03	0.06	0.11	0.15	0.19	0.23	0.28	0.33	0.35	0.38	0.43	0.45	0.47	0.47
-170	1.13	0.28	0.16	0.16	0.05	0.03	0.06	0.11	0.15	0.19	0.24	0.28	0.31	0.35	0.38	0.41	0.43	0.45	0.45
-160	1.13	0.30	0.16	0.16	0.12	0.03	0.07	0.10	0.14	0.17	0.22	0.25	0.29	0.32	0.35	0.38	0.39	0.41	0.42
-150	1.13	0.34	0.16	0.16	0.15	0.03	0.05	0.07	0.11	0.15	0.18	0.22	0.25	0.27	0.30	0.33	0.34	0.35	0.35
-140	1.13	0.41	0.16	0.17	0.16	0.12	0.04	0.07	0.08	0.12	0.15	0.17	0.19	0.22	0.24	0.26	0.27	0.28	0.29
-130	1.13	0.51	0.16	0.17	0.17	0.16	0.13	0.05	0.06	0.08	0.09	0.11	0.13	0.16	0.18	0.18	0.19	0.20	0.21
-120	1.13	0.62	0.27	0.17	0.18	0.18	0.18	0.16	0.13	0.07	0.07	0.07	0.09	0.09	0.11	0.11	0.12	0.13	0.13
-110	1.13	0.73	0.46	0.26	0.18	0.19	0.20	0.20	0.20	0.21	0.18	0.16	0.15	0.14	0.14	0.13	0.13	0.13	0.13
-100	1.13	0.87	0.71	0.57	0.44	0.34	0.27	0.22	0.21	0.21	0.22	0.23	0.24	0.25	0.26	0.26	0.27	0.28	0.29
-90	1.13	1.09	1.06	1.03	1.00	0.97	0.94	0.90	0.87	0.84	0.81	0.78	0.74	0.71	0.68	0.65	0.62	0.58	0.55
-80	1.13	1.43	1.81	2.24	2.72	3.21	3.73	4.23	4.74	5.22	5.67	6.08	6.44	6.76	7.03	7.24	7.39	7.47	7.48
-70	1.13	1.83	2.77	3.87	5.07	6.31	7.59	8.83	10.0	11.2	12.2	13.1	13.9	14.7	15.3	15.7	16.0	16.2	16.3
-60	1.13	2.26	3.82	5.65	7.64	9.63	11.6	13.5	15.3	16.9	18.4	19.8	21.0	22.1	22.9	23.6	24.2	24.5	24.6
-50	1.13	2.68	4.88	7.43	10.1	12.7	15.3	17.7	20.0	22.1	24.0	25.8	27.4	28.8	30.0	30.9	31.6	32.0	32.2
-40	1.13	3.08	5.84	9.02	12.3	15.4	18.4	21.3	24.0	26.5	28.9	31.1	33.0	34.7	36.1	37.3	38.2	38.6	38.8
-30	1.13	3.41	6.66	10.3	14.0	17.5	21.0	24.2	27.3	30.2	32.9	35.3	37.5	39.4	41.1	42.5	43.5	44.2	44.5
-20	1.13	3.67	7.30	11.3	15.3	19.1	22.8	26.3	29.7	32.8	35.8	38.4	40.8	42.9	44.8	46.5	47.8	48.8	49.3
-10	1.13	3.82	7.70	11.9	16.1	20.1	23.9	27.6	31.1	34.4	37.5	40.2	42.7	45.0	47.1	49.0	50.7	52.0	52.9
0	1.13	3.88	7.84	12.1	16.4	20.4	24.3	28.0	31.6	34.8	38.0	40.7	43.2	45.5	47.4	49.4	51.1	53.0	57.3
10	1.13	3.83	7.71	12.0	16.1	20.1	23.9	27.6	31.2	34.4	37.5	40.2	42.8	45.1	47.2	49.1	50.9	52.4	53.5
20	1.13	3.68	7.32	11.4	15.3	19.2	22.9	26.4	29.8	32.9	35.8	38.5	40.9	43.1	45.0	46.7	48.1	49.1	49.7
30	1.13	3.43	6.70	10.4	14.1	17.6	21.1	24.3	27.4	30.3	33.0	35.4	37.7	39.6	41.3	42.7	43.8	44.4	44.8
40	1.13	3.10	5.89	9.09	12.4	15.5	18.5	21.5	24.2	26.7	29.2	31.3	33.3	34.9	36.3	37.5	38.4	39.0	39.3
50	1.13	2.71	4.94	7.51	10.2	12.9	15.5	17.9	20.2	22.4	24.3	26.1	27.7	29.2	30.3	31.3	32.0	32.5	32.7
60	1.13	2.29	3.89	5.74	7.77	9.80	11.8	13.7	15.5	17.2	18.7	20.2	21.4	22.5	23.4	24.2	24.7	25.0	25.1
70	1.13	1.86	2.84	3.97	5.20	6.48	7.81	9.07	10.3	11.5	12.5	13.5	14.4	15.1	15.8	16.3	16.6	16.9	17.0
80	1.13	1.47	1.88	2.34	2.86	3.39	3.93	4.49	5.02	5.52	6.01	6.46	6.88	7.24	7.55	7.80	7.99	8.11	8.16
90	1.13	1.13	1.14	1.14	1.15	1.15	1.16	1.16	1.17	1.17	1.18	1.18	1.19	1.19	1.20	1.20	1.21	1.21	1.22
100	1.13	0.90	0.76	0.63	0.50	0.38	0.30	0.23	0.20	0.19	0.19	0.19	0.19	0.19	0.20	0.20	0.20	0.21	0.21
110	1.13	0.76	0.49	0.27	0.17	0.17	0.17	0.17	0.18	0.18	0.18	0.17	0.16	0.13	0.11	0.10	0.08	0.08	0.08
120	1.13	0.64	0.28	0.16	0.16	0.17	0.17	0.16	0.12	0.04	0.03	0.02	0.03	0.03	0.03	0.03	0.02	0.02	0.02
130	1.13	0.52	0.16	0.16	0.16	0.16	0.12	0.03	0.03	0.04	0.04	0.05	0.06	0.11	0.12	0.13	0.13	0.13	0.13
140	1.13	0.41	0.16	0.16	0.16	0.11	0.02	0.04	0.05	0.07	0.11	0.13	0.16	0.17	0.18	0.18	0.17	0.17	0.16
150	1.13	0.35	0.16	0.16	0.16	0.02	0.04	0.05	0.08	0.13	0.16	0.18	0.20	0.22	0.25	0.29	0.29	0.29	0.29
160	1.13	0.30	0.16	0.16	0.12	0.02	0.05	0.08	0.12	0.16	0.20	0.22	0.26	0.30	0.32	0.32	0.33	0.33	0.33
170	1.13	0.28	0.15	0.15	0.05	0.03	0.05	0.10	0.14	0.18	0.22	0.26	0.30	0.33	0.36	0.38	0.43	0.44	0.45
180	1.13	0.27	0.15	0.15	0.02	0.03	0.06	0.11	0.15	0.19	0.23	0.28	0.33	0.35	0.38	0.43	0.45	0.47	0.46

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:24 May 2022

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.17V I:0.7776A P:6.560W PF:0.6932 Freq:59.98Hz Lamp Flux:159.445x1 lm		
NAME: LED	TYPE:A9B1-7W-A	WEIGHT:
SPEC.:Large angle	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--2 UNIT: cd

H(DEG) / V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	0.48	0.47	0.44	0.38	0.32	0.30	0.30	0.26	0.18	0.15	0.15	0.12	0.09	0.13	0.27	0.29	0.29	0.65
-170	0.45	0.43	0.43	0.36	0.32	0.31	0.29	0.26	0.19	0.16	0.15	0.12	0.08	0.14	0.27	0.29	0.29	0.65
-160	0.41	0.38	0.36	0.33	0.32	0.30	0.27	0.22	0.17	0.16	0.14	0.12	0.08	0.16	0.29	0.29	0.29	0.65
-150	0.34	0.33	0.33	0.31	0.30	0.27	0.21	0.18	0.17	0.15	0.13	0.09	0.11	0.20	0.29	0.29	0.29	0.65
-140	0.28	0.27	0.26	0.24	0.22	0.19	0.17	0.17	0.15	0.13	0.09	0.10	0.15	0.25	0.29	0.29	0.29	0.65
-130	0.20	0.19	0.18	0.19	0.17	0.15	0.14	0.13	0.10	0.09	0.11	0.16	0.23	0.29	0.29	0.29	0.29	0.65
-120	0.13	0.13	0.12	0.12	0.11	0.10	0.09	0.10	0.13	0.16	0.20	0.27	0.29	0.29	0.29	0.29	0.31	0.65
-110	0.13	0.14	0.14	0.15	0.16	0.17	0.19	0.23	0.28	0.29	0.29	0.29	0.29	0.29	0.29	0.29	0.34	0.65
-100	0.29	0.29	0.29	0.29	0.29	0.28	0.28	0.28	0.29	0.29	0.29	0.28	0.28	0.29	0.30	0.34	0.43	0.65
-90	0.56	0.56	0.57	0.57	0.58	0.59	0.59	0.60	0.60	0.61	0.61	0.62	0.63	0.63	0.64	0.64	0.65	0.65
-80	7.46	7.37	7.21	6.99	6.71	6.38	6.01	5.58	5.10	4.59	4.07	3.54	2.99	2.46	1.93	1.44	1.02	0.65
-70	16.2	16.0	15.7	15.3	14.7	14.0	13.2	12.2	11.1	9.98	8.75	7.47	6.18	4.87	3.63	2.47	1.44	0.65
-60	24.5	24.3	23.8	23.0	22.2	21.2	20.0	18.6	17.1	15.4	13.6	11.6	9.57	7.49	5.47	3.57	1.90	0.65
-50	32.1	31.7	31.1	30.2	29.1	27.8	26.1	24.4	22.4	20.2	17.9	15.4	12.8	10.0	7.27	4.65	2.36	0.65
-40	38.8	38.4	37.6	36.5	35.2	33.5	31.5	29.4	27.0	24.4	21.7	18.7	15.6	12.3	8.90	5.66	2.76	0.65
-30	44.4	43.9	43.0	41.7	40.1	38.2	36.0	33.5	30.8	27.9	24.7	21.4	17.8	14.2	10.3	6.49	3.11	0.65
-20	49.1	48.5	47.4	45.8	43.9	41.8	39.3	36.6	33.6	30.3	26.9	23.3	19.4	15.5	11.3	7.12	3.38	0.65
-10	52.9	52.1	50.6	48.7	46.5	44.1	41.4	38.5	35.4	31.9	28.3	24.5	20.5	16.3	12.0	7.52	3.54	0.65
0	56.3	54.3	52.1	50.0	47.5	45.0	42.3	39.2	36.0	32.6	28.8	25.0	20.9	16.6	12.2	7.66	3.60	0.65
10	53.3	52.4	50.8	48.8	46.6	44.1	41.5	38.6	35.5	32.0	28.4	24.6	20.5	16.3	12.0	7.53	3.55	0.65
20	49.5	48.8	47.6	46.0	44.1	41.9	39.4	36.7	33.7	30.4	27.0	23.4	19.5	15.5	11.4	7.15	3.39	0.65
30	44.6	44.1	43.2	41.9	40.3	38.3	36.1	33.7	30.9	28.0	24.8	21.5	17.9	14.2	10.4	6.53	3.13	0.65
40	39.1	38.6	37.8	36.7	35.4	33.7	31.8	29.6	27.2	24.6	21.8	18.8	15.7	12.4	8.97	5.70	2.79	0.65
50	32.5	32.2	31.5	30.6	29.5	28.1	26.4	24.7	22.7	20.5	18.1	15.6	13.0	10.2	7.35	4.70	2.38	0.65
60	25.0	24.8	24.3	23.6	22.7	21.6	20.3	18.9	17.4	15.7	13.8	11.8	9.73	7.62	5.56	3.63	1.93	0.65
70	16.9	16.7	16.3	15.8	15.2	14.4	13.6	12.6	11.5	10.3	8.99	7.68	6.35	5.00	3.73	2.54	1.48	0.65
80	8.10	7.97	7.77	7.51	7.18	6.81	6.39	5.92	5.40	4.87	4.32	3.74	3.17	2.60	2.04	1.52	1.06	0.65
90	1.19	1.16	1.13	1.09	1.06	1.03	1.00	0.97	0.94	0.91	0.87	0.84	0.81	0.78	0.75	0.72	0.69	0.65
100	0.21	0.22	0.22	0.23	0.23	0.24	0.24	0.25	0.26	0.28	0.29	0.31	0.33	0.35	0.37	0.39	0.47	0.65
110	0.08	0.09	0.11	0.12	0.15	0.17	0.20	0.23	0.26	0.26	0.26	0.26	0.27	0.28	0.30	0.32	0.37	0.65
120	0.03	0.03	0.04	0.05	0.04	0.04	0.04	0.06	0.10	0.14	0.20	0.26	0.27	0.27	0.28	0.29	0.32	0.65
130	0.13	0.13	0.13	0.13	0.12	0.08	0.07	0.07	0.06	0.06	0.09	0.15	0.24	0.28	0.28	0.29	0.31	0.65
140	0.17	0.18	0.19	0.18	0.17	0.16	0.14	0.14	0.10	0.09	0.07	0.08	0.15	0.25	0.28	0.28	0.30	0.65
150	0.29	0.29	0.29	0.26	0.24	0.22	0.18	0.16	0.14	0.11	0.10	0.07	0.10	0.20	0.29	0.28	0.29	0.65
160	0.33	0.32	0.31	0.30	0.29	0.27	0.24	0.19	0.16	0.15	0.12	0.11	0.08	0.16	0.29	0.28	0.29	0.65
170	0.44	0.43	0.40	0.33	0.30	0.29	0.28	0.25	0.18	0.15	0.14	0.12	0.08	0.14	0.27	0.29	0.29	0.65
180	0.48	0.47	0.44	0.38	0.32	0.30	0.30	0.26	0.18	0.15	0.15	0.12	0.09	0.13	0.27	0.29	0.29	0.65

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:24 May 2022

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: