

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		2169.3 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of I _{max}	60.9V x 65.0H
	At 50% of I _{max}	38.9V x 39.6H
	At 90% of I _{max}	16.6V x 17.5H
Beam Flux	Total	1000.3 lumens per klm.
	To 10% of I _{max}	916.0 lumens per klm.
	To 50% of I _{max}	598.1 lumens per klm.
	To 90% of I _{max}	140.3 lumens per klm.
	Upward LOR	1.2 %
	Downward LOR	98.8 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-24

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.14V I:0.6175A P:5.266W PF:0.7026 Freq:59.97Hz Lamp Flux:350.229x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Spot Light Non LED	WEIGHT:
SPEC.:5.5W MR16 3000K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Uplight Shroud

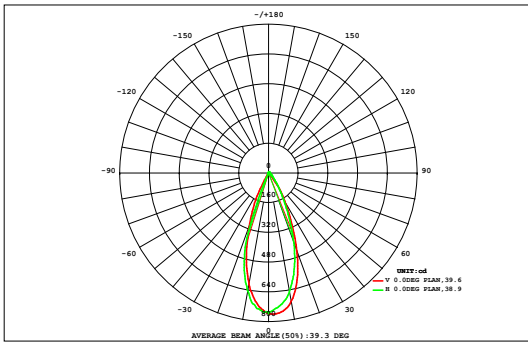

DATA OF LAMP		Eff:66.51lm/W	
MODEL	D1B1-A	Imax (cd)	759.7
NOMINAL POWER (W)	5.5	AVAILABILITY (%)	90.1
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	315.7
NOMINAL FLUX (lm)	350.229	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	350.2
TEST VOLTAGE (V)	12	θ @50% (H, V)	40,39DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM															UNIT:lm		Φ t	Φ a		
	0.03	0.04	0.06	0.09	0.14	0.19	0.24	0.30	0.35	0.35	0.30	0.25	0.19	0.14	0.10	0.07	0.05			0.03	
45	0.03	0.04	0.06	0.09	0.14	0.19	0.24	0.30	0.35	0.35	0.30	0.25	0.19	0.14	0.10	0.07	0.05	0.03	2.92	0.00	
40	0.03	0.05	0.09	0.14	0.20	0.29	0.38	0.48	0.56	0.58	0.52	0.43	0.32	0.22	0.15	0.09	0.06	0.04	4.62	0.86	
35	0.04	0.07	0.11	0.19	0.29	0.42	0.58	0.75	0.89	0.94	0.88	0.76	0.59	0.38	0.22	0.13	0.07	0.04	7.36	4.98	
30	0.04	0.08	0.14	0.24	0.39	0.62	0.95	1.27	1.49	1.54	1.43	1.22	0.96	0.69	0.39	0.18	0.09	0.05	11.8	10.1	
25	0.05	0.09	0.16	0.30	0.56	1.06	1.61	2.08	2.39	2.46	2.27	1.90	1.45	1.03	0.66	0.30	0.11	0.06	18.5	17.2	
20	0.05	0.09	0.18	0.37	0.92	1.65	2.38	3.03	3.46	3.56	3.31	2.77	2.09	1.43	0.92	0.49	0.15	0.06	26.9	25.8	
15	0.04	0.08	0.18	0.52	1.32	2.18	3.13	3.93	4.41	4.52	4.27	3.66	2.78	1.88	1.16	0.67	0.22	0.06	35.0	34.2	
10	0.03	0.07	0.17	0.69	1.59	2.60	3.71	4.61	5.13	5.24	4.99	4.34	3.36	2.27	1.38	0.79	0.29	0.06	41.3	40.7	
5	0.02	0.04	0.14	0.76	1.70	2.79	3.99	4.96	5.50	5.63	5.42	4.75	3.72	2.52	1.52	0.87	0.33	0.05	44.7	44.1	
0	0.01	0.02	0.10	0.70	1.60	2.75	3.97	4.97	5.54	5.67	5.42	4.74	3.68	2.42	1.45	0.83	0.31	0.05	44.2	43.7	
-5	0.01	0.02	0.07	0.50	1.29	2.41	3.64	4.59	5.16	5.27	4.97	4.28	3.18	1.98	1.20	0.70	0.24	0.04	39.5	39.0	
-10	0.01	0.01	0.04	0.26	0.87	1.67	2.89	3.81	4.32	4.43	4.14	3.42	2.26	1.43	0.90	0.53	0.15	0.03	31.2	30.5	
-15	0.01	0.01	0.02	0.09	0.41	0.90	1.55	2.45	2.99	3.09	2.73	1.95	1.33	0.93	0.63	0.34	0.07	0.02	19.5	18.7	
-20	0.00	0.01	0.01	0.03	0.11	0.33	0.58	0.79	0.92	0.98	0.98	0.87	0.72	0.57	0.39	0.15	0.03	0.02	7.50	5.75	
-25	0.00	0.01	0.01	0.01	0.02	0.06	0.13	0.17	0.16	0.21	0.34	0.40	0.39	0.32	0.16	0.04	0.02	0.01	2.47	0.00	
-30	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.02	0.01	0.06	0.15	0.19	0.18	0.10	0.04	0.02	0.01	0.01	0.84	0.00	
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.05	0.05	0.03	0.02	0.01	0.01	0.01	0.01	0.24	0.00	
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.09	0.00	
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)	10	15	20	25	30	35	40	45				
Φ t	0.37	0.69	1.49	4.90	11.4	19.9	29.8	38.2	43.3	44.6	42.2	36.0	27.2	18.3	11.3	6.21	2.23	0.64	339	---	
Φ a	0.00	0.00	0.00	2.61	9.73	18.6	28.6	37.2	42.3	43.6	41.0	34.7	25.9	16.9	9.86	4.55	0.30	0.00	---	316	


one-half-peak spread: U:16.4,D:20.7 , L:19.7,R:20.2 NEMA Beam Type: Type 4

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-24

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.14V I:0.6175A P:5.266W PF:0.7026 Freq:59.97Hz Lamp Flux:350.229x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Spot Light Non LED	WEIGHT:
SPEC.:5.5W MR16 3000K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Uplight Shroud

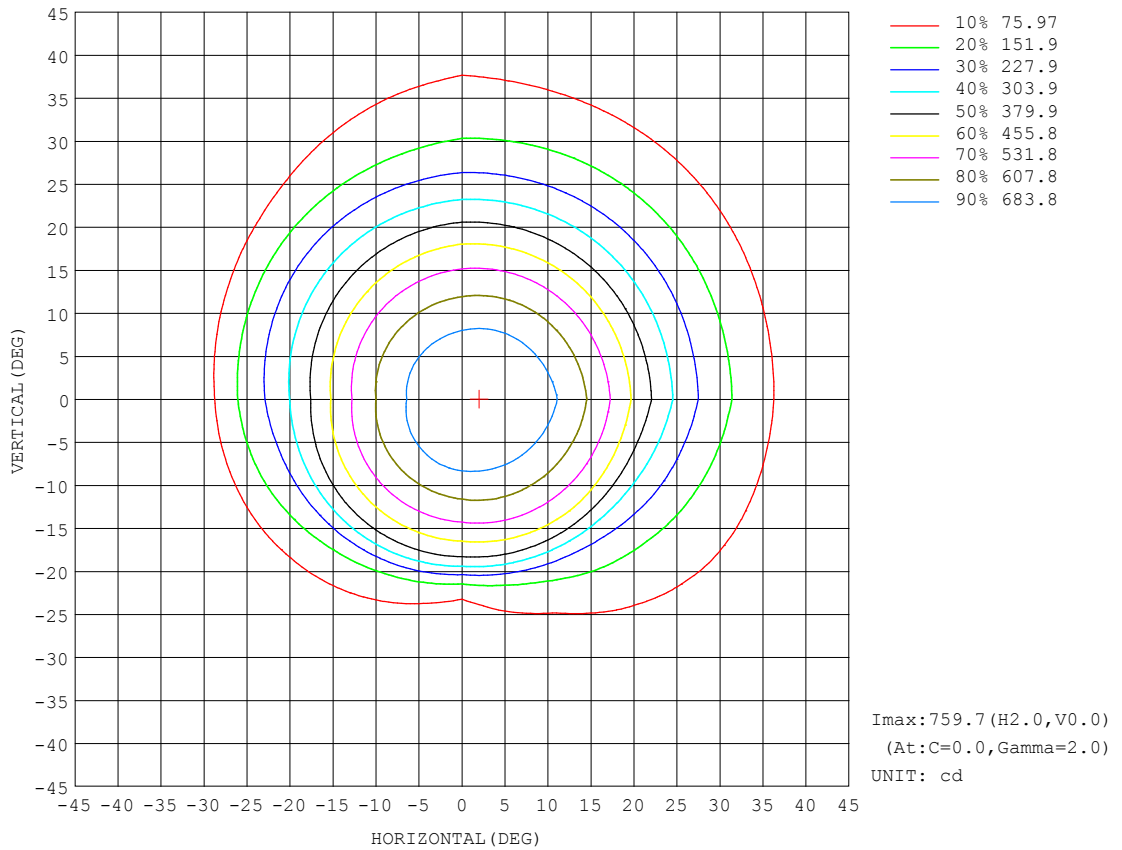


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-24

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.14V I:0.6175A P:5.266W PF:0.7026 Freq:59.97Hz Lamp Flux:350.229x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Spot Light Non LED	WEIGHT:
SPEC.:5.5W MR16 3000K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Uplight Shroud

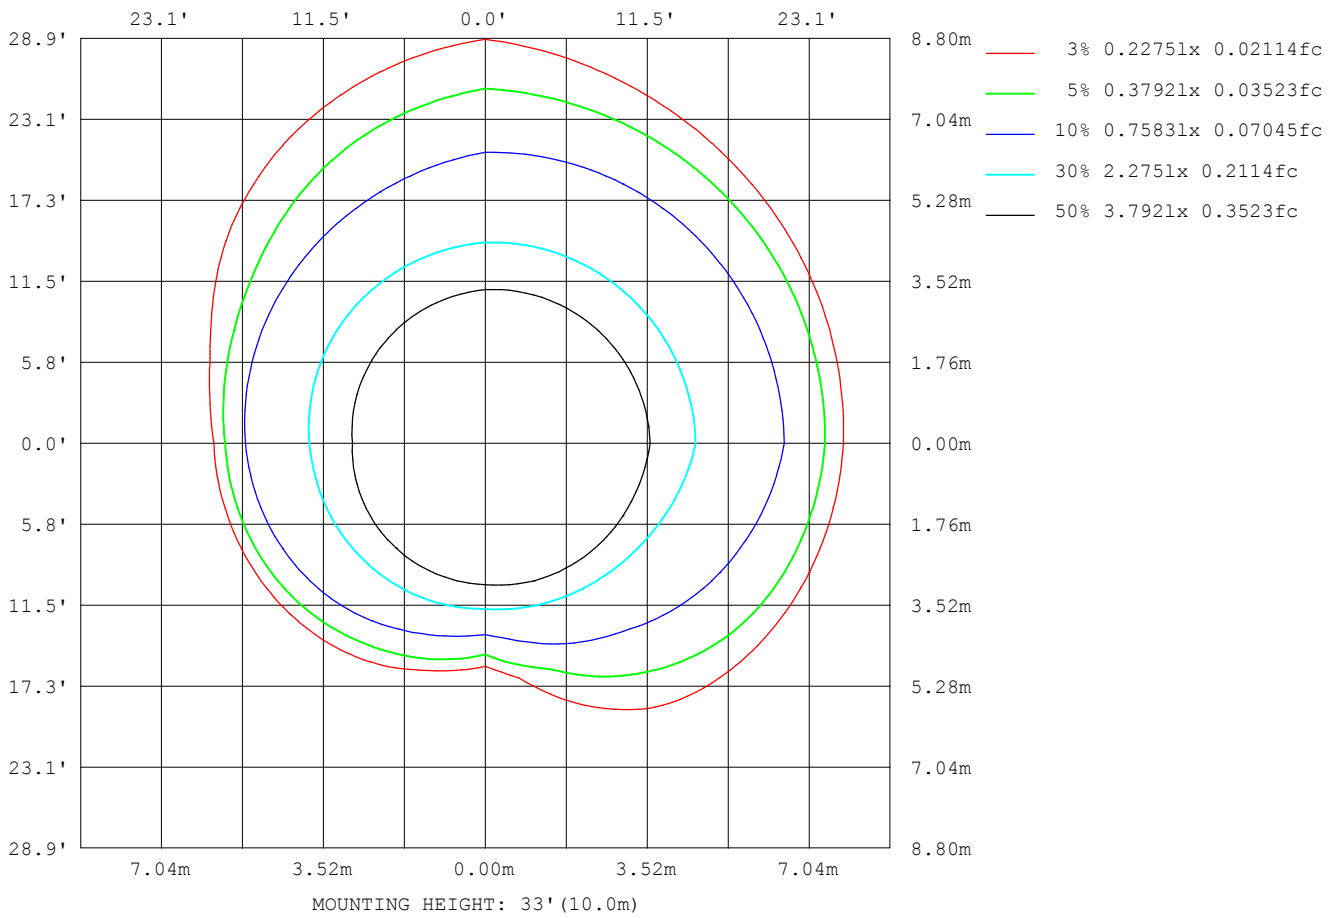

H(β) Range:-90 - 90DEG
 H(β) Interval: 0.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:ADMIN
 Test Date:2025-07-24

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
 Humidity:65.0%
 Test Distance:13.563m [K=1.0000]
 Remarks:

Planar Illuminance Curve

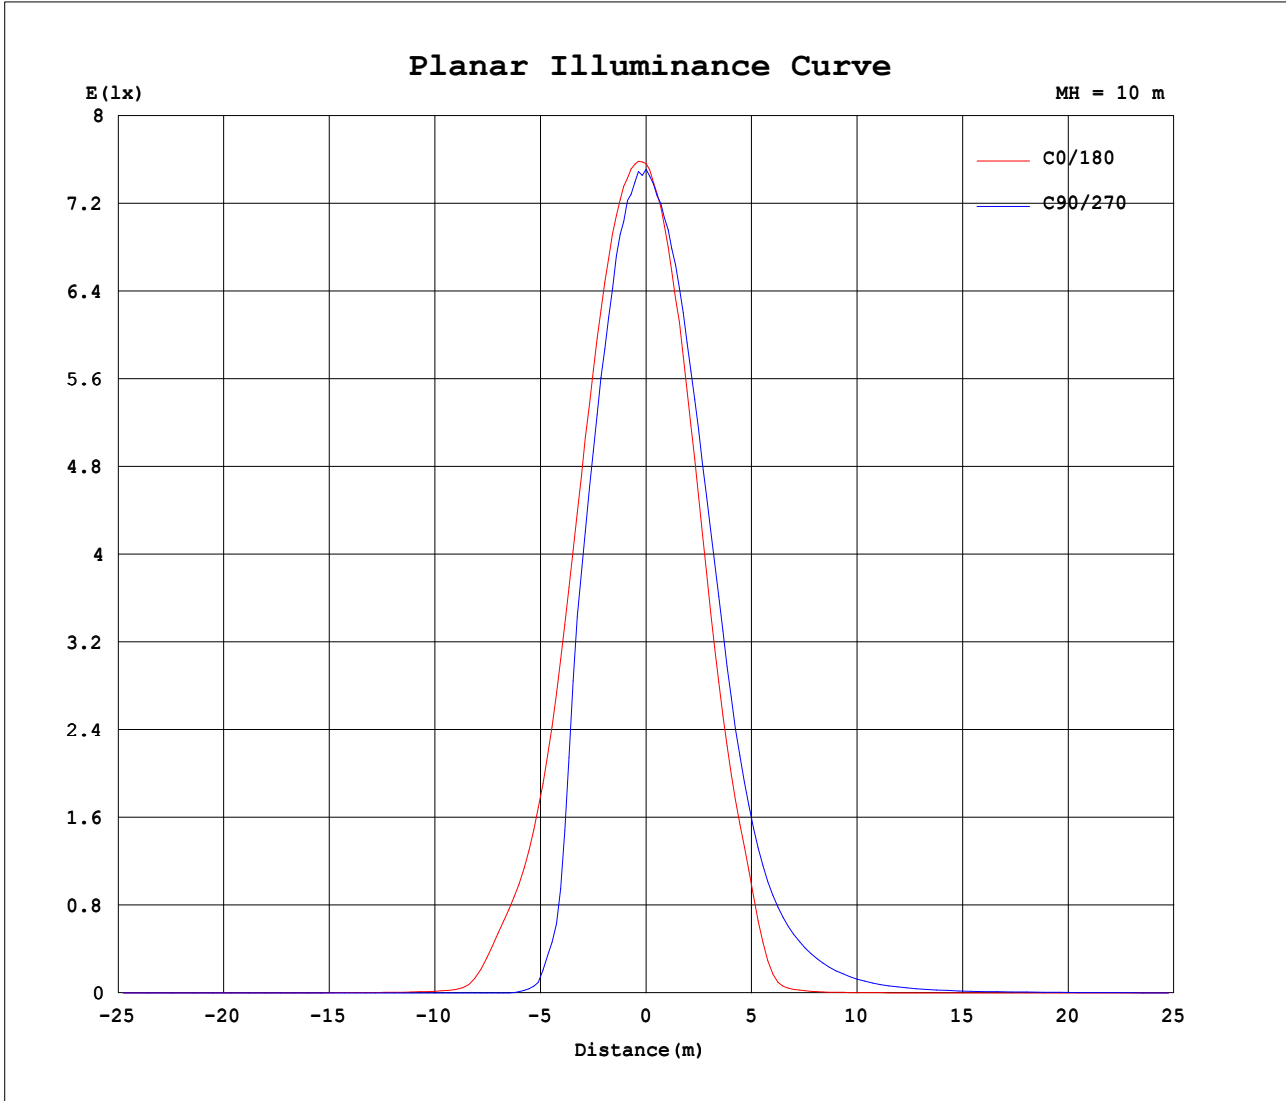


H(β) Range:-90 - 90DEG
 H(β) Interval: 0.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:ADMIN
 Test Date:2025-07-24

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
 Humidity:65.0%
 Test Distance:13.563m [K=1.0000]
 Remarks:

AAI Figure

Test:U:12.14V I:0.6175A P:5.266W PF:0.7026 Freq:59.97Hz Lamp Flux:350.229x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Spot Light Non LED	WEIGHT:
SPEC.:5.5W MR16 3000K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Uplight Shroud

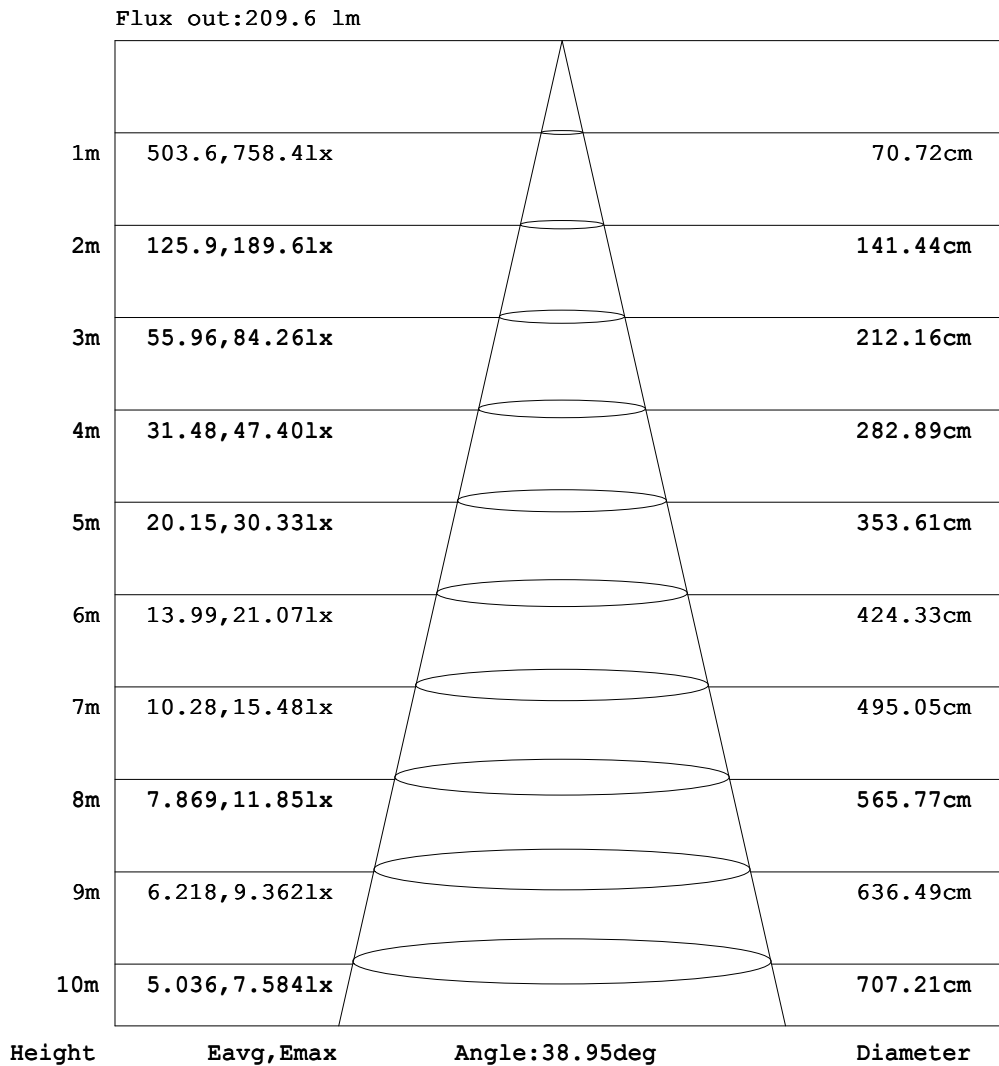

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-24

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.14V I:0.6175A P:5.266W PF:0.7026 Freq:59.97Hz Lamp Flux:350.229x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Spot Light Non LED	WEIGHT:
SPEC.:5.5W MR16 3000K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Uplight Shroud

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.14	0.47	0.93	1.47	2.06	2.58	3.05	3.38	3.59	3.80	3.74
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.16	0.47	0.93	1.48	2.08	2.66	3.19	3.60	3.91	4.06	4.24
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.11	0.37	0.75	1.21	1.74	2.29	2.82	3.28	3.67	3.98	4.20
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.08	0.20	0.45	0.78	1.16	1.58	1.99	2.38	2.71	2.97	3.15
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.05	0.10	0.19	0.35	0.57	0.81	1.07	1.31	1.52	1.68	1.79
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.07	0.12	0.20	0.28	0.39	0.50	0.60	0.67	0.73
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.06	0.07	0.10	0.13	0.15	0.16
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.04	0.03	0.03	0.02	0.01	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.08	0.11	0.14	0.15	0.15	0.14	0.13	0.11	0.08	0.04	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.01	0.10	0.18	0.23	0.26	0.31	0.29	0.27	0.26	0.23	0.19	0.13	0.07	0.00
-40	0.00	0.00	0.00	0.00	0.00	0.12	0.22	0.31	0.41	0.40	0.44	0.47	0.49	0.51	0.49	0.44	0.34	0.19	0.00
-30	0.00	0.00	0.00	0.00	0.09	0.21	0.34	0.47	0.49	0.61	0.70	0.85	1.04	1.50	2.26	3.14	5.83	7.08	3.78
-20	0.00	0.00	0.00	0.00	0.13	0.27	0.44	0.53	0.67	0.84	1.14	1.69	3.72	12.7	54.2	106	150	225	259
-10	0.00	0.00	0.00	0.00	0.15	0.35	0.56	0.65	0.83	1.16	1.73	4.06	18.2	104	206	380	515	605	645
0	0.00	0.00	0.00	0.00	0.16	0.40	0.60	0.75	0.96	1.38	2.24	6.34	45.6	179	305	464	608	708	756
10	0.00	0.01	0.03	0.06	0.27	0.61	1.07	1.58	2.62	4.76	8.84	17.5	43.2	150	268	400	525	609	650
20	0.00	0.02	0.06	0.11	0.35	0.72	1.31	2.08	3.47	6.09	11.1	19.8	35.3	66.2	142	230	304	365	398
30	0.00	0.03	0.08	0.16	0.38	0.72	1.35	2.24	3.40	5.51	9.19	15.4	25.0	38.9	57.9	82.0	111	139	157
40	0.00	0.04	0.10	0.19	0.31	0.63	1.12	1.89	2.94	4.23	6.24	9.29	13.8	19.9	27.7	36.7	45.8	54.3	60.7
50	0.00	0.05	0.11	0.20	0.32	0.49	0.83	1.29	2.03	2.96	4.10	5.38	7.04	9.12	11.5	14.1	16.8	19.2	21.0
60	0.00	0.05	0.12	0.20	0.31	0.44	0.59	0.88	1.19	1.56	2.16	2.89	3.68	4.54	5.40	6.28	7.09	7.80	8.38
70	0.00	0.05	0.11	0.19	0.28	0.39	0.50	0.64	0.78	0.94	1.13	1.38	1.67	1.91	2.14	2.37	2.60	2.81	2.99
80	0.00	0.05	0.11	0.17	0.24	0.32	0.40	0.49	0.58	0.68	0.78	0.88	0.99	1.10	1.21	1.31	1.42	1.51	1.61
90	0.00	0.05	0.09	0.14	0.19	0.24	0.28	0.33	0.38	0.43	0.47	0.52	0.57	0.62	0.66	0.71	0.76	0.80	0.85
100	0.00	0.04	0.09	0.12	0.15	0.18	0.21	0.23	0.25	0.26	0.28	0.30	0.31	0.32	0.34	0.35	0.37	0.39	0.41
110	0.00	0.04	0.07	0.10	0.12	0.13	0.13	0.14	0.14	0.12	0.12	0.11	0.10	0.07	0.04	0.02	0.01	0.00	0.00
120	0.00	0.04	0.06	0.08	0.08	0.08	0.07	0.06	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.03	0.05	0.06	0.06	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.02	0.01	0.00
140	0.00	0.02	0.04	0.04	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.05	0.11	0.15	0.18	0.18	0.16	0.17	0.12
150	0.00	0.02	0.03	0.03	0.02	0.00	0.00	0.00	0.00	0.03	0.15	0.29	0.43	0.66	0.92	1.11	1.26	1.32	1.28
160	0.00	0.01	0.02	0.01	0.00	0.00	0.00	0.00	0.02	0.18	0.42	0.72	1.13	1.54	1.94	2.24	2.44	2.53	2.49
170	0.00	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.10	0.35	0.72	1.21	1.73	2.25	2.68	3.00	3.15	3.13	3.00
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.14	0.47	0.93	1.47	2.06	2.58	3.05	3.38	3.59	3.80	3.74

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-24

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.14V I:0.6175A P:5.266W PF:0.7026 Freq:59.97Hz Lamp Flux:350.229x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Spot Light Non LED	WEIGHT:
SPEC.:5.5W MR16 3000K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:Uplight Shroud

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	3.96	3.85	3.74	3.42	2.92	2.30	1.64	1.00	0.55	0.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-170	4.14	4.09	3.84	3.45	2.91	2.25	1.59	0.97	0.51	0.16	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00
-160	4.03	3.78	3.42	2.96	2.42	1.85	1.27	0.79	0.37	0.10	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00
-150	3.00	2.76	2.44	2.06	1.62	1.19	0.83	0.45	0.18	0.08	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00
-140	1.69	1.53	1.32	1.09	0.83	0.57	0.36	0.19	0.10	0.05	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-130	0.67	0.60	0.49	0.38	0.28	0.20	0.12	0.07	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-120	0.15	0.13	0.10	0.07	0.06	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.01	0.02	0.03	0.04	0.04	0.04	0.04	0.04	0.03	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.05	0.09	0.13	0.17	0.20	0.23	0.24	0.24	0.22	0.20	0.18	0.14	0.09	0.04	0.00	0.00	0.00	0.00
-60	0.09	0.18	0.26	0.33	0.38	0.42	0.46	0.47	0.46	0.43	0.40	0.33	0.24	0.17	0.07	0.00	0.00	0.00
-50	0.20	0.38	0.52	0.63	0.70	0.73	0.74	0.74	0.71	0.68	0.62	0.53	0.43	0.29	0.16	0.04	0.00	0.00
-40	1.34	1.85	1.95	1.86	1.69	1.50	1.33	1.19	1.06	0.96	0.84	0.74	0.60	0.44	0.25	0.09	0.00	0.00
-30	21.4	33.6	39.4	36.1	19.0	5.36	3.02	2.12	1.64	1.32	1.12	0.93	0.76	0.57	0.34	0.12	0.00	0.00
-20	247	189	153	117	89.4	59.4	14.9	4.26	2.57	1.83	1.40	1.13	0.91	0.67	0.41	0.17	0.00	0.00
-10	637	578	470	298	192	123	65.2	9.46	3.86	2.38	1.70	1.31	1.03	0.75	0.47	0.20	0.00	0.00
0	752	702	595	446	291	176	100	17.2	4.85	2.79	1.91	1.44	1.11	0.80	0.50	0.22	0.00	0.00
10	641	589	491	361	238	148	78.6	16.6	7.46	4.17	2.63	1.82	1.29	0.87	0.53	0.24	0.01	0.00
20	387	343	277	205	143	91.0	33.1	14.2	7.82	4.63	2.95	2.01	1.35	0.88	0.53	0.23	0.02	0.00
30	153	139	118	91.7	56.3	29.3	17.6	10.6	6.55	4.23	2.88	1.94	1.27	0.86	0.50	0.21	0.03	0.00
40	55.4	47.3	38.2	29.1	21.0	14.8	10.2	6.99	4.89	3.49	2.42	1.64	1.11	0.74	0.44	0.19	0.04	0.00
50	19.3	17.0	14.4	11.9	9.55	7.49	5.83	4.53	3.40	2.48	1.73	1.26	0.92	0.61	0.37	0.15	0.05	0.00
60	7.86	7.19	6.43	5.60	4.78	3.95	3.20	2.49	1.92	1.54	1.23	0.92	0.68	0.48	0.27	0.12	0.05	0.00
70	2.84	2.67	2.48	2.28	2.07	1.86	1.61	1.36	1.17	0.99	0.81	0.65	0.47	0.32	0.19	0.11	0.05	0.00
80	1.53	1.44	1.35	1.25	1.14	1.04	0.92	0.82	0.71	0.60	0.49	0.40	0.32	0.24	0.17	0.11	0.05	0.00
90	0.80	0.76	0.71	0.66	0.62	0.57	0.52	0.47	0.43	0.38	0.33	0.28	0.24	0.19	0.14	0.09	0.05	0.00
100	0.39	0.37	0.35	0.34	0.32	0.31	0.30	0.28	0.26	0.25	0.23	0.21	0.18	0.15	0.12	0.09	0.04	0.00
110	0.00	0.01	0.02	0.04	0.07	0.10	0.11	0.12	0.12	0.14	0.14	0.13	0.13	0.12	0.10	0.07	0.04	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.06	0.07	0.08	0.08	0.08	0.06	0.04	0.00
130	0.01	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.06	0.06	0.05	0.03	0.00
140	0.17	0.16	0.19	0.20	0.17	0.11	0.05	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.04	0.04	0.02	0.00
150	1.35	1.30	1.17	0.98	0.70	0.46	0.34	0.15	0.01	0.00	0.00	0.00	0.00	0.02	0.03	0.03	0.02	0.00
160	2.58	2.55	2.38	2.08	1.67	1.23	0.78	0.46	0.19	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.01	0.00
170	3.21	3.33	3.24	2.95	2.49	1.91	1.32	0.76	0.39	0.10	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.00
180	3.96	3.85	3.74	3.42	2.92	2.30	1.64	1.00	0.55	0.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-24

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: