



Together, we are brighter.

PROJECT: _____

TYPE: _____

CAT #: _____

DESCRIPTION

Linear, Integrated Non-Modular, Silicone-Injected - White, Side-Flex - 3' Section, 6W, 72 Lm/Ft, 2700K, 10-15V

SPECIFICATIONS


Construction	Silicone-Injected
Finish	White
Lead Wire	3'
Voltage	10-15V
Mounting	Ordered Separately
Light Warranty	3 Years
Housing Warranty	10 Years

FINISHES

White

NOTES

L3S1-3-6W-27K-WH

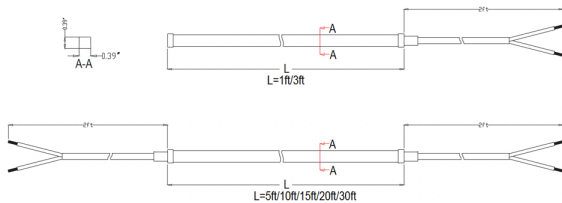

Lumien Lighting

☎ 770-485-9002
 ✉ orders@lumienlighting.com
 🌐 www.lumienlighting.com

Lumien Lighting reserves the right to modify product specifications without notification. © 2023 Lumien Enterprise Inc.

MODULE TYPE (required)	WATTS	COLOR TEMP	BEAM SPREAD	FINISH	ACCESSORIES
---------------------------	-------	---------------	----------------	--------	-------------

L3S1-3-6W-27K-WH

+

CORE: L3S1 - [] - [] - [] - []

10W	2700K	120°	WH
20W	3000K		
2W			

+

Accessories - LumienARC (Optional)

- LAA-028** BK Aluminum, ARC, Rigid, 1-Sided Glare
- LAA-027** BK Aluminum, ARC, Rigid, 5ft Channel
- LAA-029** BK Aluminum, ARC, Flex, 5ft Channel
- LAA-030** BK Aluminum, ARC, Flex, 1-Sided Glare
- LAA-041** BK Aluminum, ARC, Corner, Flush
- LAA-042** BK Aluminum, ARC, Corner, Inner Tall Wall
- LAA-043** BK Aluminum, ARC, Corner, Outer Tall
- LAA-044** BK Aluminum, ARC, Channel Connector
- LAA-045** BK Aluminum, ARC, Channel Under Cap
- LAS-006** Stainless Steel, ARC Channel Spike

	CORE	CORE	CORE	CORE
	L3S1-1-2W-27K-WH L3S1-1-2W-30K-WH	L3S1-3-6W-27K-WH L3S1-3-6W-30K-WH	L3S1-5-10W-27K-WH L3S1-5-10W-30K-WH	L3S1-10-20W-27K-WH L3S1-10-20W-30K-WH
Construction	Silicone-Injected	Silicone-Injected	Silicone-Injected	Silicone-Injected
Finish	White	White	White	White
Input Voltage	10-15V	10-15V	10-15V	10-15V
Wattage (Volt Amps)	2W (2.1)	6W (6.8)	10W (10.9)	20W (21.2)
Module Lumens	72 Lm / Ft, 76 Lm / Ft	72 Lm / Ft, 76 Lm / Ft	72 Lm / Ft, 76 Lm / Ft	72 Lm / Ft, 76 Lm / Ft
Color Temperature	2700K, 3000K	2700K, 3000K	2700K, 3000K	2700K, 3000K
Beam Spread	120°	120°	120°	120°
Lead Wire Length	3'	3'	3'	3'
CRI	80+	80+	80+	80+
RGB	No	No	No	No
Dimmable	Primary Dimming	Primary Dimming	Primary Dimming	Primary Dimming
Rated Life	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Warranty	3 Years	3 Years	3 Years	3 Years
Core Drill Size	-	-	-	-


	CORE	CORE	CORE
	L3S1-15-30W-27K-WH L3S1-15-30W-30K-WH	L3S1-20-40W-27K-WH L3S1-20-40W-30K-WH	L3S1-30-60W-27K-WH L3S1-30-60W-30K-WH
Construction	Silicone-Injected	Silicone-Injected	Silicone-Injected
Finish	White	White	White
Input Voltage	10-15V	10-15V	10-15V
Wattage (Volt Amps)	30W (31.5)	40W (42.2)	60W (63.2)
Module Lumens	72 Lm / Ft, 76 Lm / Ft	72 Lm / Ft, 76 Lm / Ft	72 Lm/Ft, 76 Lm/Ft
Color Temperature	2700K, 3000K	2700K, 3000K	2700K, 3000K
Beam Spread	120°	120°	120°
Lead Wire Length	3'	3'	3'
CRI	80+	80+	80+
RGB	No	No	No
Dimmable	Primary Dimming	Primary Dimming	Primary Dimming
Rated Life	50,000 Hrs	50,000 Hrs	50,000 Hrs
Warranty	3 Years	3 Years	3 Years
Core Drill Size	-	-	-

Accessories - LumienARC**LAA-028**

Accessory, Aluminum - Black, LumienARC, Rigid, 1-Sided Glare Shield, 5ft Channel

**LAA-027**

Accessory, Aluminum - Black, LumienARC, Rigid, 5ft Channel

**LAA-029**

Accessory, Aluminum - Black, LumienARC, Flex, 5ft Channel

**LAA-030**

Accessory, Aluminum - Black, LumienARC, Flex, 1-Sided Glare Shield, 5ft Channel

**LAA-041**

Accessory, LumienARC, Corner, Flush

**LAA-042**

Accessory, LumienARC, Corner, Inner Tall Wall

**LAA-043**

Accessory, LumienARC, Corner, Outer Tall Wall

**LAA-044**

Accessory, LumienARC, Channel Connector

**LAA-045**

Accessory, LumienARC, Channel Under Cap Plate

**LAS-006**

Accessory, Stainless Steel, LumienARC Channel Spike