



Together, we are brighter.

PROJECT: \_\_\_\_\_

TYPE: \_\_\_\_\_

CAT #: \_\_\_\_\_

DESCRIPTION

Linear, Integrated Non-Modular, Silicone-Injected - White, Side-Flex - 5' Section, 10W, 76 Lm/Ft, 3000K, 10-15V

SPECIFICATIONS

<b>Construction</b>	Silicone-Injected
<b>Finish</b>	White
<b>Lead Wire</b>	3'
<b>Voltage</b>	10-15V
<b>Mounting</b>	Ordered Separately
<b>Light Warranty</b>	3 Years
<b>Housing Warranty</b>	10 Years

FINISHES

White

NOTES

---

---

---

---


---

---

---

---

L3S1-5-10W-30K-WH

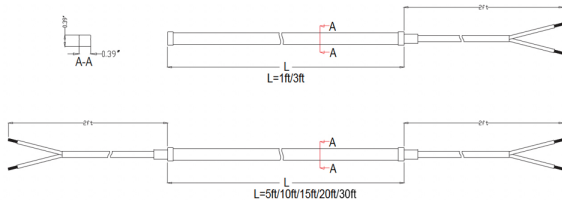

MODULE TYPE (required)	WATTS	COLOR TEMP	BEAM SPREAD	FINISH	ACCESSORIES
---------------------------	-------	---------------	----------------	--------	-------------

L3S1-5-10W-30K-WH

+

CORE: L3S1

-	-	-	-
10W	3000K	120°	WH
20W	2700K		
2W			

+

**Accessories - LumienARC (Optional)**

- LAA-028** BK Aluminum, ARC, Rigid, 1-Sided Glare
- LAA-027** BK Aluminum, ARC, Rigid, 5ft Channel
- LAA-029** BK Aluminum, ARC, Flex, 5ft Channel
- LAA-030** BK Aluminum, ARC, Flex, 1-Sided Glare
- LAA-041** BK Aluminum, ARC, Corner, Flush
- LAA-042** BK Aluminum, ARC, Corner, Inner Tall Wall
- LAA-043** BK Aluminum, ARC, Corner, Outer Tall
- LAA-044** BK Aluminum, ARC, Channel Connector
- LAA-045** BK Aluminum, ARC, Channel Under Cap
- LAS-006** Stainless Steel, ARC Channel Spike

	CORE	CORE	CORE	CORE
	L3S1-1-2W-27K-WH L3S1-1-2W-30K-WH	L3S1-3-6W-27K-WH L3S1-3-6W-30K-WH	L3S1-5-10W-27K-WH L3S1-5-10W-30K-WH	L3S1-10-20W-27K-WH L3S1-10-20W-30K-WH
<b>Construction</b>	Silicone-Injected	Silicone-Injected	Silicone-Injected	Silicone-Injected
<b>Finish</b>	White	White	White	White
<b>Input Voltage</b>	10-15V	10-15V	10-15V	10-15V
<b>Wattage (Volt Amps)</b>	2W (2.1)	6W (6.8)	10W (10.9)	20W (21.2)
<b>Module Lumens</b>	72 Lm / Ft, 76 Lm / Ft	72 Lm / Ft, 76 Lm / Ft	72 Lm / Ft, 76 Lm / Ft	72 Lm / Ft, 76 Lm / Ft
<b>Color Temperature</b>	2700K, 3000K	2700K, 3000K	2700K, 3000K	2700K, 3000K
<b>Beam Spread</b>	120°	120°	120°	120°
<b>Lead Wire Length</b>	3'	3'	3'	3'
<b>CRI</b>	80+	80+	80+	80+
<b>RGB</b>	No	No	No	No
<b>Dimmable</b>	Primary Dimming	Primary Dimming	Primary Dimming	Primary Dimming
<b>Rated Life</b>	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
<b>Warranty</b>	3 Years	3 Years	3 Years	3 Years
<b>Core Drill Size</b>	-	-	-	-


	CORE	CORE	CORE
	L3S1-15-30W-27K-WH L3S1-15-30W-30K-WH	L3S1-20-40W-27K-WH L3S1-20-40W-30K-WH	L3S1-30-60W-27K-WH L3S1-30-60W-30K-WH
<b>Construction</b>	Silicone-Injected	Silicone-Injected	Silicone-Injected
<b>Finish</b>	White	White	White
<b>Input Voltage</b>	10-15V	10-15V	10-15V
<b>Wattage (Volt Amps)</b>	30W (31.5)	40W (42.2)	60W (63.2)
<b>Module Lumens</b>	72 Lm / Ft, 76 Lm / Ft	72 Lm / Ft, 76 Lm / Ft	72 Lm/Ft, 76 Lm/Ft
<b>Color Temperature</b>	2700K, 3000K	2700K, 3000K	2700K, 3000K
<b>Beam Spread</b>	120°	120°	120°
<b>Lead Wire Length</b>	3'	3'	3'
<b>CRI</b>	80+	80+	80+
<b>RGB</b>	No	No	No
<b>Dimmable</b>	Primary Dimming	Primary Dimming	Primary Dimming
<b>Rated Life</b>	50,000 Hrs	50,000 Hrs	50,000 Hrs
<b>Warranty</b>	3 Years	3 Years	3 Years
<b>Core Drill Size</b>	-	-	-

**Accessories - LumienARC****LAA-028**

Accessory, Aluminum - Black, LumienARC, Rigid, 1-Sided Glare Shield, 5ft Channel

**LAA-027**

Accessory, Aluminum - Black, LumienARC, Rigid, 5ft Channel

**LAA-029**

Accessory, Aluminum - Black, LumienARC, Flex, 5ft Channel

**LAA-030**

Accessory, Aluminum - Black, LumienARC, Flex, 1-Sided Glare Shield, 5ft Channel

**LAA-041**

Accessory, LumienARC, Corner, Flush

**LAA-042**

Accessory, LumienARC, Corner, Inner Tall Wall

**LAA-043**

Accessory, LumienARC, Corner, Outer Tall Wall

**LAA-044**

Accessory, LumienARC, Channel Connector

**LAA-045**

Accessory, LumienARC, Channel Under Cap Plate

**LAS-006**

Accessory, Stainless Steel, LumienARC Channel Spike