


## L3S1-20-40W-30K-WH

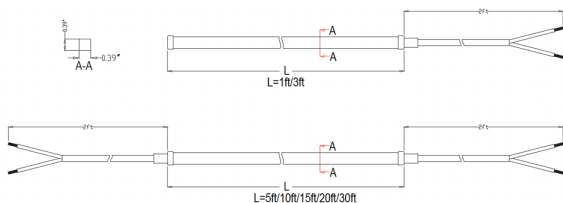

PROJECT: \_\_\_\_\_

TYPE: \_\_\_\_\_

CAT #: \_\_\_\_\_

### DESCRIPTION

**Linear, Integrated Non-Modular, Silicone-Injected - White, Side-Flex - 20' Section, 40W, 76 Lm/Ft, 3000K, 10-15V**

### SPECIFICATIONS

|                       |                    |
|-----------------------|--------------------|
| <b>Construction</b>   | Silicone-Injected  |
| <b>Finish</b>         | White              |
| <b>Lead Wire</b>      | 3'                 |
| <b>Voltage</b>        | 10-15V             |
| <b>Mounting</b>       | Ordered Separately |
| <b>Light Warranty</b> | 3 Years            |

### FINISHES

White

### NOTES

#### Lumien Lighting

770-485-9002  
orders@lumienlighting.com  
www.lumienlighting.com

Lumien Lighting reserves the right to modify product specifications without notification. © 2023 Lumien Enterprise Inc.



# ORDERING GUIDE

| MODULE TYPE<br>(required) | WATTS | COLOR<br>TEMP | BEAM<br>SPREAD | FINISH | ACCESSORIES |
|---------------------------|-------|---------------|----------------|--------|-------------|
|---------------------------|-------|---------------|----------------|--------|-------------|

L3S1-20-40W-30K-**WH** CORE: L3S1

+

-

10W

20W

2W

-

2700K

3000K

-

120°

-

A

WH

+

- Accessories - LumienARC (Optional)**
- LAA-028** BK Aluminum, ARC, Rigid, 1-Sided Glare
  - LAA-027** BK Aluminum, ARC, Rigid, 5ft Channel
  - LAA-029** BK Aluminum, ARC, Flex, 5ft Channel
  - LAA-030** BK Aluminum, ARC, Flex, 1-Sided Glare
  - LAA-041** BK Aluminum, ARC, Corner, Flush
  - LAA-042** BK Aluminum, ARC, Corner, Inner Tall Wall
  - LAA-043** BK Aluminum, ARC, Corner, Outer Tall
  - LAA-044** BK Aluminum, ARC, Channel Connector
  - LAA-045** BK Aluminum, ARC, Channel Under Cap
  - LAS-006** Stainless Steel, ARC Channel Spike

|                     | CORE                                 | CORE                                 | CORE                                   | CORE                                     |
|---------------------|--------------------------------------|--------------------------------------|----------------------------------------|------------------------------------------|
|                     | L3S1-1-2W-27K-WH<br>L3S1-1-2W-30K-WH | L3S1-3-6W-27K-WH<br>L3S1-3-6W-30K-WH | L3S1-5-10W-27K-WH<br>L3S1-5-10W-30K-WH | L3S1-10-20W-27K-WH<br>L3S1-10-20W-30K-WH |
| Construction        | Silicone-Injected                    | Silicone-Injected                    | Silicone-Injected                      | Silicone-Injected                        |
| Finish              | White                                | White                                | White                                  | White                                    |
| Input Voltage       | 10-15V                               | 10-15V                               | 10-15V                                 | 10-15V                                   |
| Wattage (Volt Amps) | 2W (2.1)                             | 6W (6.8)                             | 10W (10.9)                             | 20W (20.64)                              |
| Module Lumens       | 72 Lm / Ft, 76 Lm / Ft               | 72 Lm / Ft, 76 Lm / Ft               | 72 Lm / Ft, 76 Lm / Ft                 | 72 Lm / Ft, 76 Lm / Ft                   |
| Color Temperature   | 2700K, 3000K                         | 2700K, 3000K                         | 2700K, 3000K                           | 2700K, 3000K                             |
| Beam Spread         | 120°                                 | 120°                                 | 120°                                   | 120°                                     |
| Lead Wire Length    | 3'                                   | 3'                                   | 3'                                     | 3'                                       |
| CRI                 | 80+                                  | 80+                                  | 80+                                    | 80+                                      |
| RGB                 | No                                   | No                                   | No                                     | No                                       |
| Dimmable            | Yes                                  | Yes                                  | Yes                                    | Yes                                      |
| Rated Life          | 50,000 Hrs                           | 50,000 Hrs                           | 50,000 Hrs                             | 50,000 Hrs                               |
| Warranty            | 3 Years                              | 3 Years                              | 3 Years                                | 3 Years                                  |
| Core Drill Size     | -                                    | -                                    | -                                      | -                                        |

|                     | CORE                                     | CORE                                     | CORE                                     |
|---------------------|------------------------------------------|------------------------------------------|------------------------------------------|
|                     | L3S1-15-30W-27K-WH<br>L3S1-15-30W-30K-WH | L3S1-20-40W-27K-WH<br>L3S1-20-40W-30K-WH | L3S1-30-60W-27K-WH<br>L3S1-30-60W-30K-WH |
| Construction        | Silicone-Injected                        | Silicone-Injected                        | Silicone-Injected                        |
| Finish              | White                                    | White                                    | Antique                                  |
| Input Voltage       | 10-15V                                   | 10-15V                                   | 10-15V                                   |
| Wattage (Volt Amps) | 30W (29.74)                              | 40W (39.4)                               | 60W (63)                                 |
| Module Lumens       | 72 Lm / Ft, 76 Lm / Ft                   | 72 Lm / Ft, 76 Lm / Ft                   | 72 Lm/Ft, 76 Lm/Ft                       |
| Color Temperature   | 2700K, 3000K                             | 2700K, 3000K                             | 2700K, 3000K                             |
| Beam Spread         | 120°                                     | 120°                                     | 120°                                     |
| Lead Wire Length    | 3'                                       | 3'                                       | 3'                                       |
| CRI                 | 80+                                      | 80+                                      | 80+                                      |
| RGB                 | No                                       | No                                       | No                                       |
| Dimmable            | Yes                                      | Yes                                      | Yes                                      |
| Rated Life          | 50,000 Hrs                               | 50,000 Hrs                               | 50,000 Hrs                               |
| Warranty            | 3 Years                                  | 3 Years                                  | 3 Years                                  |
| Core Drill Size     | -                                        | -                                        | -                                        |

## Accessories - LumienARC



**LAA-028**

Accessory, Aluminum - Black, LumienARC, Rigid, 1-Sided Glare Shield, 5ft Channel



**LAA-027**

Accessory, Aluminum - Black, LumienARC, Rigid, 5ft Channel



**LAA-029**

Accessory, Aluminum - Black, LumienARC, Flex, 5ft Channel



**LAA-030**

Accessory, Aluminum - Black, LumienARC, Flex, 1-Sided Glare Shield, 5ft Channel



**LAA-041**

Accessory, LumienARC, Corner, Flush



**LAA-042**

Accessory, LumienARC, Corner, Inner Tall Wall



**LAA-043**

Accessory, LumienARC, Corner, Outer Tall Wall



**LAA-044**

Accessory, LumienARC, Channel Connector



**LAA-045**

Accessory, LumienARC, Channel Under Cap Plate



**LAS-006**

Accessory, Stainless Steel, LumienARC Channel Spike