

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		1348.3 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	84.4V x 78.3H
	At 50% of Imax	47.0V x 47.4H
	At 90% of Imax	18.2V x 18.0H
Beam Flux	Total	1000.2 lumens per klm.
	To 10% of Imax	883.3 lumens per klm.
	To 50% of Imax	509.1 lumens per klm.
	To 90% of Imax	94.8 lumens per klm.
	Upward LOR	1.5 %
	Downward LOR	98.6 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.03V I:0.7004A P:5.390W PF:0.6398 Freq:59.99Hz Lamp Flux:291.766x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Underwater Light WEIGHT:	
SPEC.:5.5W 2700K Matted Glass	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

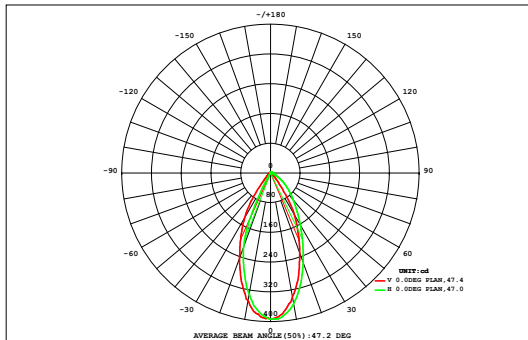

DATA OF LAMP		Eff:54.13lm/W	
MODEL	M4B6-5.5W-27K-R	Imax (cd)	393.4
NOMINAL POWER (W)	5.5	AVAILABILITY (%)	86.6
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	252.8
NOMINAL FLUX (lm)	291.766	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	291.8
TEST VOLTAGE (V)	12	θ @50% (H,V)	47,47DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.01	0.03	0.05	0.07	0.10	0.14	0.17	0.20	0.23	0.23	0.20	0.17	0.14	0.10	0.07	0.05	0.03	0.02	2.02	0.00
72	0.01	0.03	0.05	0.07	0.10	0.14	0.17	0.20	0.23	0.23	0.20	0.17	0.14	0.10	0.07	0.05	0.03	0.02	2.02	0.00
64	0.02	0.04	0.07	0.11	0.16	0.24	0.32	0.41	0.48	0.48	0.41	0.32	0.23	0.16	0.11	0.07	0.04	0.02	3.69	0.00
56	0.02	0.05	0.09	0.16	0.27	0.42	0.59	0.76	0.91	0.91	0.76	0.59	0.41	0.26	0.16	0.09	0.05	0.02	6.51	2.57
48	0.03	0.06	0.12	0.23	0.39	0.62	0.90	1.20	1.44	1.43	1.19	0.89	0.62	0.39	0.22	0.12	0.06	0.03	9.94	7.32
40	0.03	0.07	0.15	0.29	0.52	0.87	1.35	1.86	2.22	2.20	1.82	1.31	0.85	0.51	0.28	0.15	0.07	0.03	14.6	12.5
32	0.04	0.08	0.17	0.33	0.65	1.27	2.15	2.91	3.37	3.35	2.84	2.04	1.19	0.63	0.32	0.17	0.08	0.04	21.6	19.9
24	0.04	0.08	0.17	0.36	0.84	1.90	3.08	4.14	4.86	4.82	4.05	2.95	1.74	0.77	0.35	0.17	0.08	0.04	30.5	28.9
	0.04	0.08	0.16	0.37	1.08	2.45	3.90	5.41	6.41	6.36	5.27	3.74	2.26	0.93	0.34	0.16	0.08	0.04	39.1	37.7
	0.04	0.08	0.14	0.35	1.21	2.73	4.41	6.20	7.34	7.27	6.02	4.19	2.52	1.02	0.31	0.13	0.07	0.04	44.1	42.9
	0.04	0.07	0.12	0.30	1.11	2.57	4.30	6.08	7.19	7.12	5.90	4.08	2.36	0.91	0.26	0.11	0.07	0.03	42.6	41.4
	0.03	0.06	0.11	0.23	0.78	1.94	3.48	5.04	5.93	5.88	4.91	3.32	1.76	0.64	0.21	0.10	0.06	0.03	34.5	33.3
-24	0.03	0.06	0.09	0.17	0.44	1.14	2.07	3.28	4.02	3.98	3.19	1.95	0.98	0.36	0.15	0.09	0.05	0.03	22.1	20.6
-32	0.03	0.05	0.08	0.12	0.22	0.48	0.87	1.19	1.34	1.31	1.11	0.76	0.40	0.19	0.11	0.07	0.05	0.03	8.41	5.66
-40	0.02	0.04	0.06	0.09	0.12	0.18	0.27	0.31	0.21	0.19	0.26	0.23	0.16	0.11	0.08	0.06	0.04	0.02	2.46	0.00
-48	0.02	0.04	0.05	0.07	0.08	0.09	0.10	0.09	0.06	0.05	0.08	0.09	0.08	0.08	0.06	0.05	0.03	0.02	1.13	0.00
-56	0.01	0.03	0.04	0.05	0.06	0.06	0.05	0.04	0.03	0.02	0.04	0.05	0.05	0.05	0.05	0.04	0.03	0.01	0.71	0.00
-64	0.01	0.02	0.03	0.04	0.04	0.04	0.03	0.02	0.01	0.01	0.02	0.03	0.04	0.04	0.03	0.03	0.02	0.01	0.45	0.00
-72	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.01	0.00	0.00	0.01	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.28	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)	16	24	32	40	48	56	64	72			
Φ t	0.47	0.96	1.73	3.35	8.10	17.2	28.1	39.1	46.0	45.6	38.1	26.7	15.8	7.18	3.14	1.66	0.92	0.46	285	---
Φ a	0.00	0.00	0.00	0.00	5.29	15.1	26.4	37.6	44.7	44.4	36.6	25.0	13.7	4.03	0.00	0.00	0.00	0.00	---	253

one-half-peak spread: U:22.2,D:25.1 , L:22.5,R:23.3


NEMA Beam Type: Type 5

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.03V I:0.7004A P:5.390W PF:0.6398 Freq:59.99Hz Lamp Flux:291.766x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Underwater Light WEIGHT:	
SPEC.:5.5W 2700K Matted Glass	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

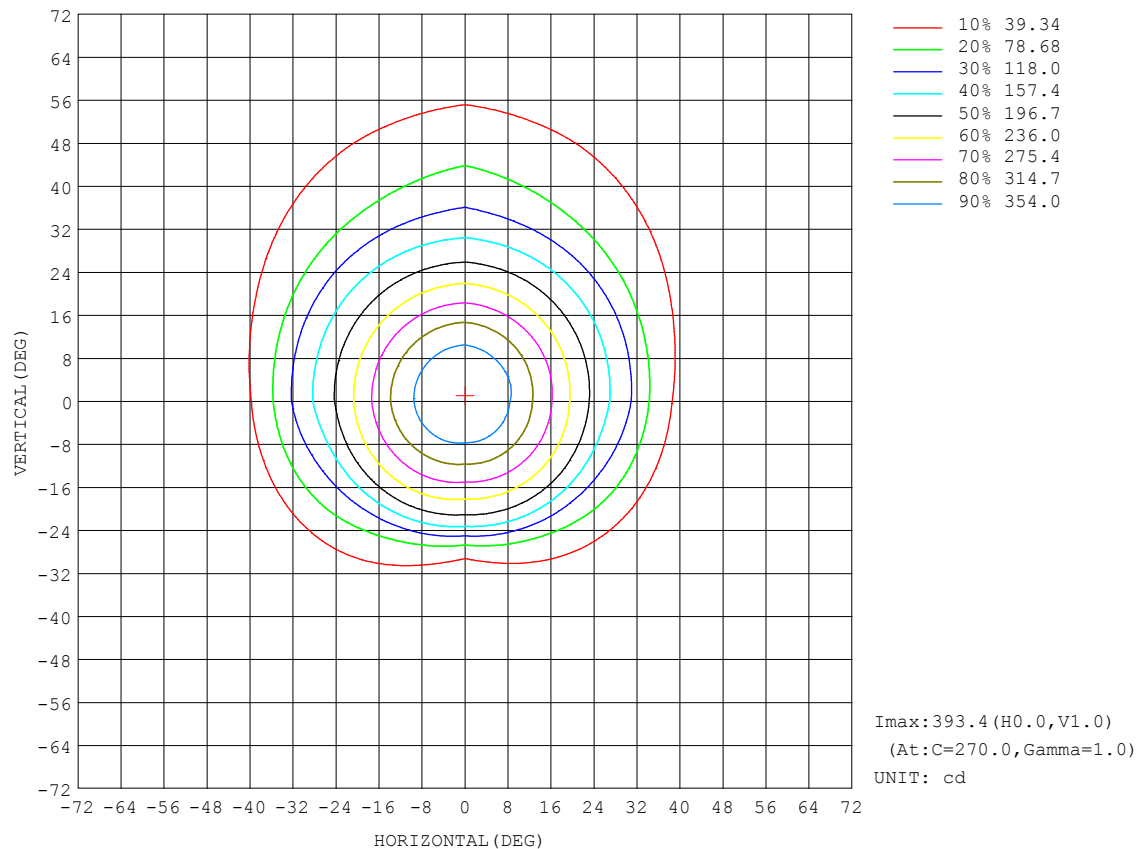


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.03V I:0.7004A P:5.390W PF:0.6398 Freq:59.99Hz Lamp Flux:291.766x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Underwater Light WEIGHT:	
SPEC.:5.5W 2700K Matted Glass	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

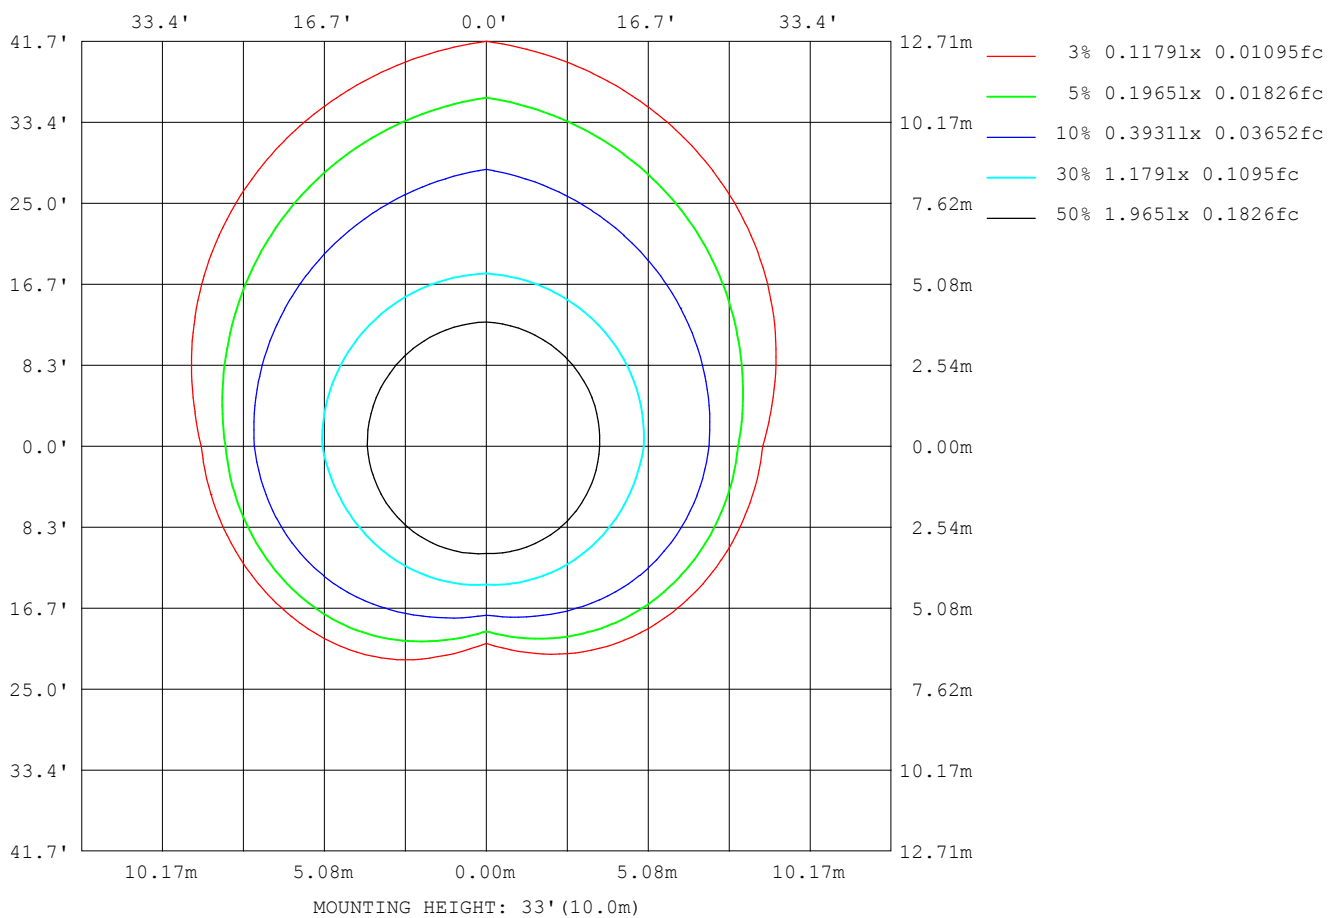

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

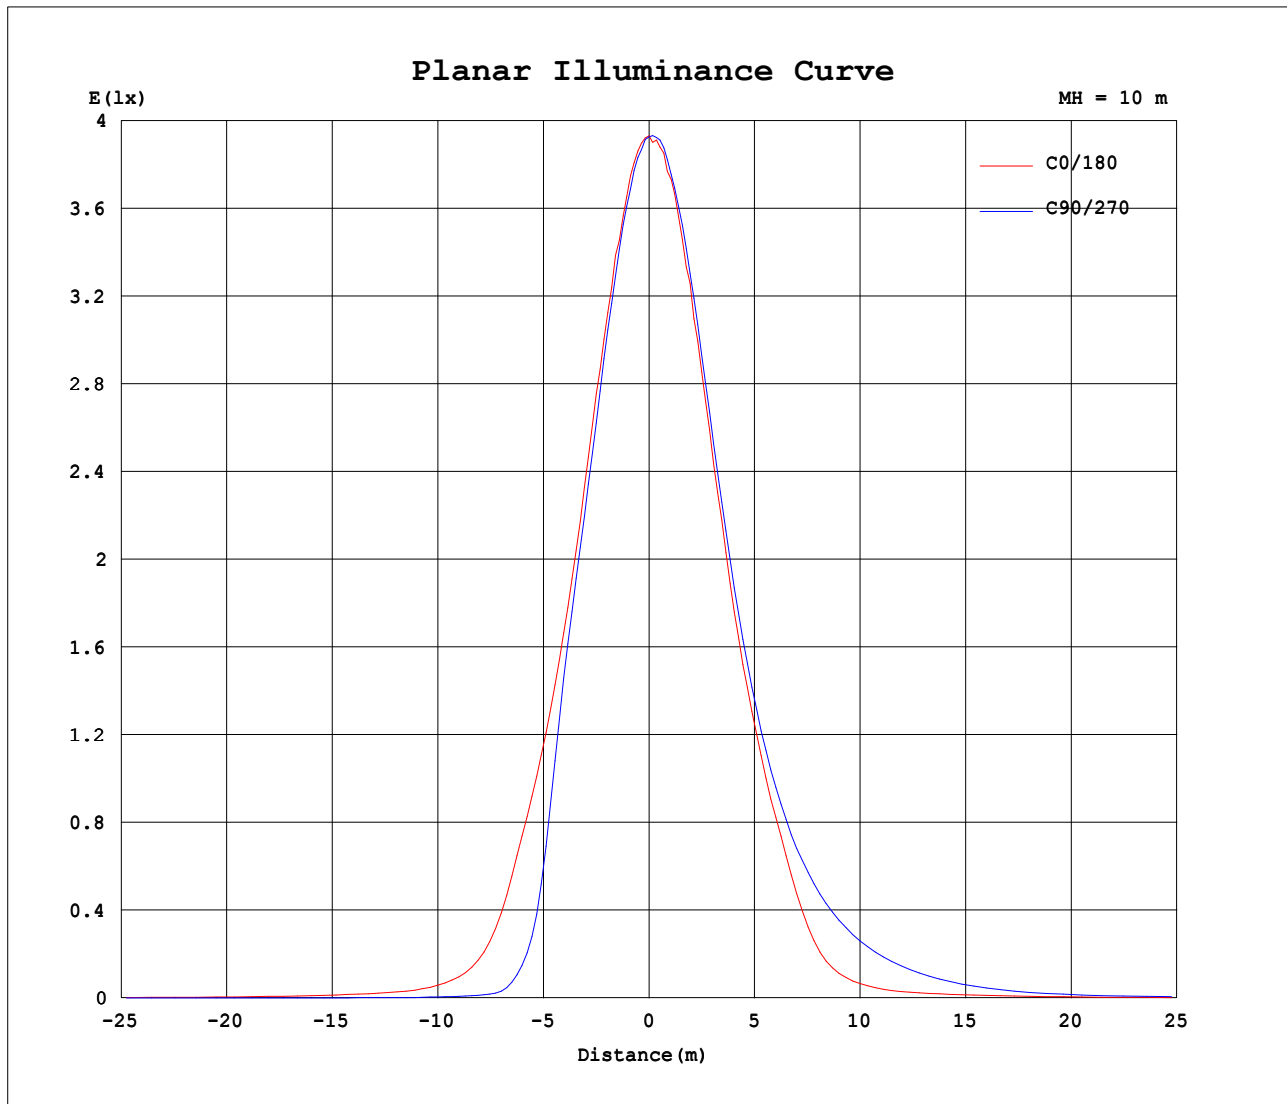


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.03V I:0.7004A P:5.390W PF:0.6398 Freq:59.99Hz Lamp Flux:291.766x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Underwater Light	WEIGHT:
SPEC.:5.5W 2700K Matted Glass	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

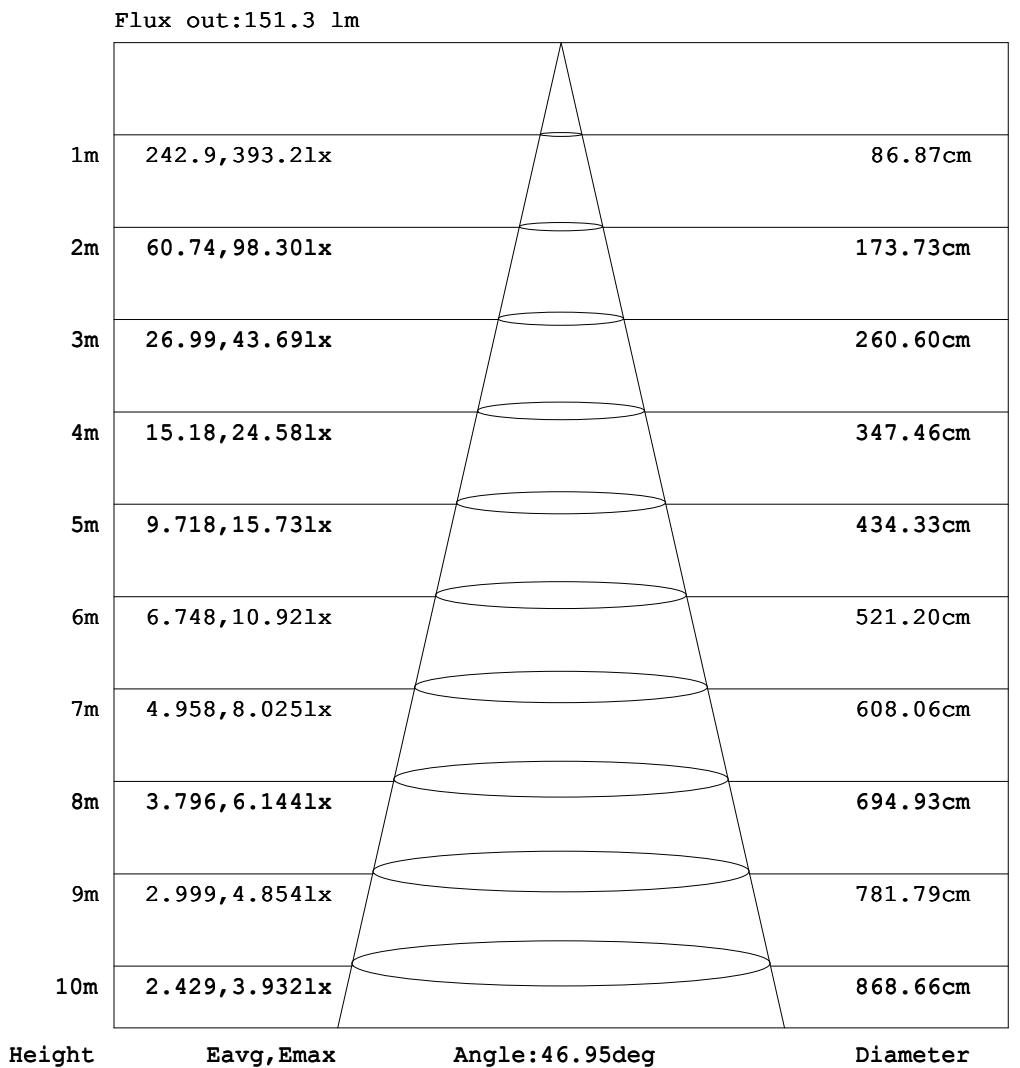

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.03V I:0.7004A P:5.390W PF:0.6398 Freq:59.99Hz Lamp Flux:291.766x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Underwater Light WEIGHT:	
SPEC.:5.5W 2700K Matted Glass	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.14	0.35	0.64	0.94	1.28	1.65	2.03	2.37	2.70	2.98	3.08
-170	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.05	0.19	0.40	0.70	1.00	1.36	1.73	2.12	2.48	2.79	3.04	3.20
-160	0.00	0.00	0.00	0.00	0.01	0.02	0.05	0.08	0.18	0.38	0.62	0.92	1.24	1.57	1.91	2.24	2.51	2.74	2.92
-150	0.00	0.00	0.00	0.00	0.01	0.02	0.05	0.09	0.15	0.28	0.48	0.70	0.96	1.22	1.49	1.75	1.97	2.16	2.31
-140	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.08	0.13	0.20	0.30	0.46	0.63	0.80	0.99	1.17	1.33	1.46	1.56
-130	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.05	0.09	0.14	0.20	0.27	0.35	0.45	0.56	0.66	0.76	0.84	0.90
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.06	0.10	0.13	0.17	0.22	0.27	0.32	0.36	0.40	0.43
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.04	0.06	0.08	0.09	0.10	0.11	0.12
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.04	0.12	0.20	0.29	0.34	0.37	0.38	0.37	0.36	0.33	0.28	0.22	0.15	0.08	0.00
-70	0.00	0.00	0.05	0.27	0.52	0.72	0.92	1.10	1.25	1.33	1.37	1.35	1.28	1.15	0.97	0.76	0.52	0.26	0.00
-60	0.00	0.00	0.27	0.68	1.09	1.52	1.92	2.26	2.48	2.54	2.51	2.40	2.24	2.02	1.71	1.34	0.92	0.47	0.00
-50	0.00	0.03	0.56	1.12	1.80	2.46	3.04	3.37	3.57	3.76	3.80	3.74	3.89	3.68	3.29	2.83	2.26	1.61	0.87
-40	0.00	0.11	0.78	1.59	2.53	3.41	3.97	4.47	4.93	5.40	5.75	5.96	6.51	7.42	8.08	8.19	7.33	5.32	2.47
-30	0.00	0.18	1.00	2.07	3.22	4.16	4.91	5.72	6.60	7.29	8.81	12.2	17.5	25.8	35.2	41.4	43.5	40.7	31.8
-20	0.00	0.25	1.19	2.44	3.81	4.81	5.90	7.05	8.14	10.5	16.4	29.1	54.7	82.6	110	152	190	209	212
-10	0.00	0.29	1.32	2.73	4.21	5.37	6.73	8.19	9.91	15.2	28.2	61.7	107	151	207	258	299	327	332
0	0.00	0.30	1.39	2.89	4.46	5.77	7.36	9.03	11.3	18.7	37.6	86.8	140	190	245	302	349	381	393
10	0.00	0.33	1.43	2.95	4.61	6.14	8.28	11.1	14.7	22.8	39.7	79.2	130	176	222	272	316	346	358
20	0.00	0.34	1.41	2.84	4.54	6.16	8.49	11.9	16.3	23.1	35.3	56.6	94.3	134	169	201	228	248	257
30	0.00	0.31	1.31	2.63	4.18	5.82	7.85	11.1	15.6	21.3	29.3	41.1	57.1	79.1	105	127	144	155	160
40	0.00	0.27	1.16	2.26	3.61	5.14	6.78	9.07	12.6	17.4	23.2	30.2	38.5	48.5	59.5	70.7	81.0	89.6	95.9
50	0.00	0.22	0.99	1.85	2.93	4.13	5.49	6.99	8.90	11.6	15.2	19.8	24.9	30.4	36.0	41.8	47.2	51.8	55.6
60	0.00	0.21	0.74	1.44	2.20	3.08	4.02	5.04	6.18	7.42	8.86	10.5	12.5	14.8	17.3	19.7	22.1	24.0	25.5
70	0.00	0.22	0.52	1.03	1.60	2.15	2.74	3.37	4.02	4.67	5.34	6.00	6.68	7.34	8.04	8.68	9.26	9.75	10.1
80	0.00	0.21	0.45	0.72	1.03	1.40	1.78	2.19	2.57	2.93	3.29	3.64	3.99	4.33	4.65	4.96	5.25	5.52	5.78
90	0.00	0.20	0.40	0.61	0.81	1.01	1.21	1.41	1.62	1.82	2.02	2.22	2.42	2.63	2.83	3.03	3.23	3.44	3.64
100	0.00	0.18	0.34	0.48	0.60	0.69	0.77	0.84	0.90	0.94	1.00	1.04	1.08	1.12	1.17	1.22	1.28	1.34	1.42
110	0.00	0.16	0.28	0.37	0.41	0.45	0.46	0.45	0.44	0.41	0.39	0.37	0.34	0.32	0.31	0.29	0.28	0.28	0.29
120	0.00	0.14	0.23	0.27	0.28	0.27	0.24	0.20	0.16	0.11	0.07	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.12	0.17	0.19	0.18	0.15	0.11	0.06	0.01	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.02	0.01	0.00
140	0.00	0.09	0.13	0.13	0.11	0.07	0.03	0.00	0.00	0.00	0.01	0.06	0.10	0.12	0.13	0.16	0.19	0.18	0.15
150	0.00	0.07	0.09	0.08	0.06	0.03	0.00	0.00	0.00	0.04	0.14	0.22	0.34	0.48	0.64	0.76	0.84	0.89	0.88
160	0.00	0.05	0.06	0.05	0.03	0.01	0.00	0.00	0.04	0.17	0.30	0.51	0.75	0.99	1.24	1.46	1.61	1.70	1.67
170	0.00	0.02	0.03	0.02	0.01	0.00	0.00	0.00	0.11	0.28	0.52	0.78	1.09	1.42	1.75	2.04	2.28	2.40	2.40
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.14	0.35	0.64	0.94	1.28	1.65	2.03	2.37	2.70	2.98	3.06

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.03V I:0.7004A P:5.390W PF:0.6398 Freq:59.99Hz Lamp Flux:291.766x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Underwater Light WEIGHT:	
SPEC.:5.5W 2700K Matted Glass	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	3.06	2.96	2.76	2.50	2.17	1.82	1.48	1.07	0.74	0.44	0.19	0.02	0.00	0.00	0.00	0.00	0.00	0.00	
-170	3.12	2.98	2.76	2.47	2.14	1.80	1.44	1.10	0.74	0.47	0.21	0.04	0.01	0.00	0.00	0.00	0.00	0.00	
-160	2.82	2.66	2.46	2.20	1.89	1.59	1.24	0.91	0.65	0.37	0.18	0.05	0.02	0.01	0.00	0.00	0.00	0.00	
-150	2.22	2.09	1.92	1.71	1.45	1.20	0.94	0.71	0.45	0.27	0.10	0.05	0.02	0.01	0.00	0.00	0.00	0.00	
-140	1.50	1.41	1.28	1.12	0.96	0.79	0.62	0.44	0.28	0.14	0.08	0.04	0.02	0.00	0.00	0.00	0.00	0.00	
-130	0.86	0.81	0.72	0.62	0.53	0.42	0.31	0.20	0.14	0.09	0.05	0.03	0.01	0.00	0.00	0.00	0.00	0.00	
-120	0.40	0.36	0.32	0.27	0.22	0.17	0.13	0.10	0.06	0.04	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.11	0.10	0.09	0.08	0.06	0.04	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.08	0.16	0.24	0.30	0.35	0.39	0.42	0.43	0.43	0.41	0.37	0.33	0.26	0.19	0.10	0.03	0.00	0.00	
-70	0.25	0.49	0.72	0.92	1.09	1.22	1.30	1.33	1.31	1.24	1.13	0.98	0.81	0.62	0.43	0.22	0.03	0.00	
-60	0.44	0.87	1.27	1.61	1.90	2.12	2.28	2.39	2.43	2.34	2.16	1.87	1.52	1.15	0.78	0.45	0.11	0.00	
-50	1.55	2.16	2.69	3.14	3.50	3.70	3.54	3.61	3.55	3.39	3.21	2.86	2.37	1.78	1.20	0.66	0.20	0.00	
-40	4.81	6.47	7.27	7.25	6.68	5.95	5.60	5.46	5.11	4.67	4.23	3.78	3.21	2.44	1.63	0.89	0.29	0.00	
-30	39.3	40.5	36.4	28.9	21.1	15.0	10.9	8.02	6.88	6.24	5.43	4.66	3.96	3.07	2.03	1.10	0.37	0.00	
-20	207	186	147	103	74.1	44.4	24.2	14.5	9.51	7.70	6.66	5.58	4.58	3.59	2.39	1.28	0.44	0.00	
-10	323	293	248	198	140	95.2	49.4	23.8	13.5	9.26	7.74	6.38	5.11	4.00	2.66	1.40	0.48	0.00	
0	379	339	290	230	177	128	70.5	31.3	16.6	10.5	8.52	6.97	5.49	4.26	2.80	1.47	0.50	0.00	
10	342	310	263	213	165	119	66.9	35.3	21.1	14.1	10.6	7.93	5.87	4.40	2.87	1.52	0.53	0.00	
20	246	224	195	161	126	84.0	51.7	33.4	22.2	15.8	11.5	8.17	5.92	4.32	2.80	1.50	0.53	0.00	
30	154	141	122	98.5	74.4	54.6	39.7	28.5	20.9	15.3	10.8	7.60	5.63	4.02	2.59	1.41	0.50	0.00	
40	89.1	80.1	69.7	58.6	47.8	38.0	29.8	22.9	17.1	12.3	8.83	6.59	4.94	3.53	2.30	1.27	0.46	0.00	
50	51.8	47.1	41.6	35.8	30.2	24.7	19.6	15.0	11.4	8.72	6.83	5.31	4.04	2.91	1.93	1.10	0.40	0.00	
60	24.0	22.0	19.7	17.2	14.7	12.4	10.4	8.74	7.30	6.03	4.95	3.97	3.08	2.27	1.55	0.91	0.31	0.00	
70	9.74	9.24	8.64	7.98	7.28	6.62	5.95	5.29	4.64	4.01	3.40	2.80	2.23	1.69	1.19	0.69	0.24	0.00	
80	5.53	5.26	4.97	4.67	4.36	4.03	3.69	3.34	2.99	2.63	2.27	1.91	1.54	1.18	0.82	0.48	0.21	0.00	
90	3.44	3.23	3.03	2.83	2.63	2.42	2.22	2.02	1.82	1.62	1.41	1.21	1.01	0.81	0.61	0.40	0.20	0.00	
100	1.34	1.28	1.22	1.17	1.12	1.08	1.04	1.00	0.94	0.90	0.84	0.77	0.69	0.60	0.48	0.34	0.18	0.00	
110	0.28	0.28	0.29	0.31	0.32	0.34	0.37	0.39	0.41	0.44	0.45	0.46	0.45	0.41	0.37	0.28	0.16	0.00	
120	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.07	0.11	0.16	0.20	0.24	0.27	0.28	0.27	0.23	0.14	0.00	
130	0.03	0.06	0.08	0.08	0.09	0.06	0.04	0.01	0.00	0.01	0.06	0.11	0.15	0.18	0.19	0.17	0.12	0.00	
140	0.22	0.26	0.27	0.26	0.27	0.26	0.21	0.16	0.08	0.01	0.00	0.03	0.07	0.11	0.13	0.13	0.09	0.00	
150	0.95	0.96	0.93	0.85	0.71	0.58	0.45	0.37	0.22	0.12	0.01	0.00	0.03	0.06	0.08	0.09	0.07	0.00	
160	1.78	1.76	1.69	1.53	1.31	1.10	0.83	0.59	0.45	0.24	0.10	0.00	0.01	0.03	0.05	0.06	0.05	0.00	
170	2.48	2.47	2.32	2.11	1.83	1.53	1.22	0.92	0.62	0.39	0.16	0.01	0.00	0.01	0.02	0.03	0.02	0.00	
180	3.06	2.96	2.76	2.50	2.17	1.82	1.48	1.07	0.74	0.44	0.19	0.02	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: