

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		1121.4 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax At 50% of Imax At 90% of Imax	94.7V x 94.8H 54.0V x 52.7H 16.1V x 14.6H
Beam Flux	Total To 10% of Imax To 50% of Imax To 90% of Imax	1000.2 lumens per klm. 924.0 lumens per klm. 519.5 lumens per klm. 60.9 lumens per klm.
	Upward LOR Downward LOR	0.3 % 99.8 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-10-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.07V I:0.7822A P:6.482W PF:0.6868 Freq:59.97Hz Lamp Flux:61.296x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Path light RGBWW	WEIGHT:
SPEC.:7W 2700K Min beam angle	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-039

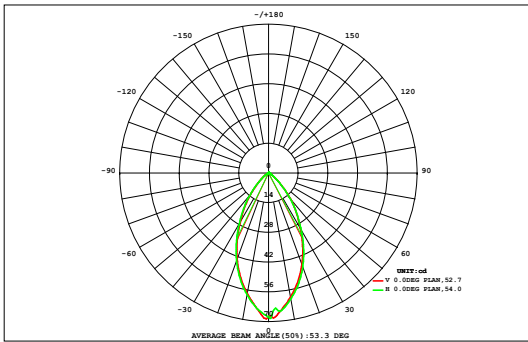

DATA OF LAMP		Eff:9.46lm/W	
MODEL	A9B1-7W-A	Imax (cd)	68.73
NOMINAL POWER (W)	7	AVAILABILITY (%)	92.7
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	56.82
NOMINAL FLUX (lm)	61.296	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	61.30
TEST VOLTAGE (V)	12	θ @50% (H, V)	53,54DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a	
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.00
72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.20	0.00
64	0.00	0.00	0.00	0.00	0.01	0.01	0.02	0.02	0.03	0.03	0.03	0.02	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.58	0.00
56	0.00	0.00	0.00	0.01	0.02	0.04	0.05	0.07	0.09	0.09	0.08	0.06	0.04	0.02	0.01	0.00	0.00	0.00	0.00	1.41	0.98
48	0.00	0.00	0.01	0.02	0.05	0.08	0.13	0.18	0.21	0.21	0.19	0.14	0.09	0.05	0.02	0.01	0.00	0.00	0.00	2.78	2.52
40	0.00	0.00	0.01	0.04	0.09	0.17	0.27	0.36	0.41	0.42	0.37	0.29	0.19	0.10	0.05	0.02	0.01	0.00	0.00	4.42	4.22
32	0.00	0.01	0.02	0.06	0.15	0.28	0.42	0.56	0.65	0.65	0.57	0.45	0.31	0.17	0.08	0.03	0.01	0.00	0.00	6.11	5.95
24	0.00	0.01	0.03	0.09	0.21	0.39	0.58	0.77	0.89	0.90	0.79	0.61	0.42	0.25	0.11	0.04	0.01	0.00	0.00	7.51	7.36
	0.00	0.01	0.04	0.12	0.26	0.47	0.72	0.94	1.09	1.10	0.97	0.75	0.51	0.31	0.14	0.05	0.01	0.00	0.00	8.31	8.16
	0.00	0.01	0.04	0.13	0.29	0.51	0.79	1.04	1.23	1.24	1.07	0.83	0.56	0.34	0.16	0.05	0.01	0.00	0.00	8.24	8.09
	0.00	0.01	0.04	0.11	0.26	0.46	0.70	0.92	1.06	1.07	0.94	0.73	0.50	0.30	0.14	0.05	0.01	0.00	0.00	7.30	7.14
-24	0.00	0.01	0.03	0.09	0.20	0.37	0.56	0.73	0.84	0.85	0.75	0.59	0.40	0.24	0.11	0.04	0.01	0.00	0.00	5.81	5.64
-32	0.00	0.01	0.02	0.06	0.14	0.26	0.40	0.52	0.59	0.60	0.53	0.42	0.29	0.16	0.07	0.03	0.01	0.00	0.00	4.09	3.89
-40	0.00	0.00	0.01	0.04	0.08	0.15	0.24	0.32	0.36	0.37	0.33	0.26	0.17	0.09	0.04	0.02	0.01	0.00	0.00	2.49	2.21
-48	0.00	0.00	0.01	0.02	0.04	0.07	0.11	0.15	0.18	0.18	0.16	0.12	0.08	0.05	0.02	0.01	0.00	0.00	0.00	1.20	0.66
-56	0.00	0.00	0.00	0.01	0.02	0.03	0.04	0.06	0.07	0.07	0.06	0.05	0.03	0.02	0.01	0.00	0.00	0.00	0.00	0.47	0.00
-64	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.15	0.00
-72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)	16	24	32	40	48	56	64	72				
Φ t	0.01	0.09	0.32	0.92	2.11	3.81	5.83	7.69	8.94	9.02	7.93	6.17	4.19	2.45	1.13	0.40	0.11	0.02	61	---	
Φ a	0.00	0.00	0.00	0.48	1.81	3.55	5.58	7.45	8.69	8.77	7.69	5.92	3.94	2.16	0.77	0.00	0.00	0.00	---	57	


one-half-peak spread: U:26.7,D:23.2 , L:24.6,R:25.5 NEMA Beam Type: Type 5

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-10-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.07V I:0.7822A P:6.482W PF:0.6868 Freq:59.97Hz Lamp Flux:61.296x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Path light RGBWW	WEIGHT:
SPEC.:7W 2700K Min beam angle	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-039

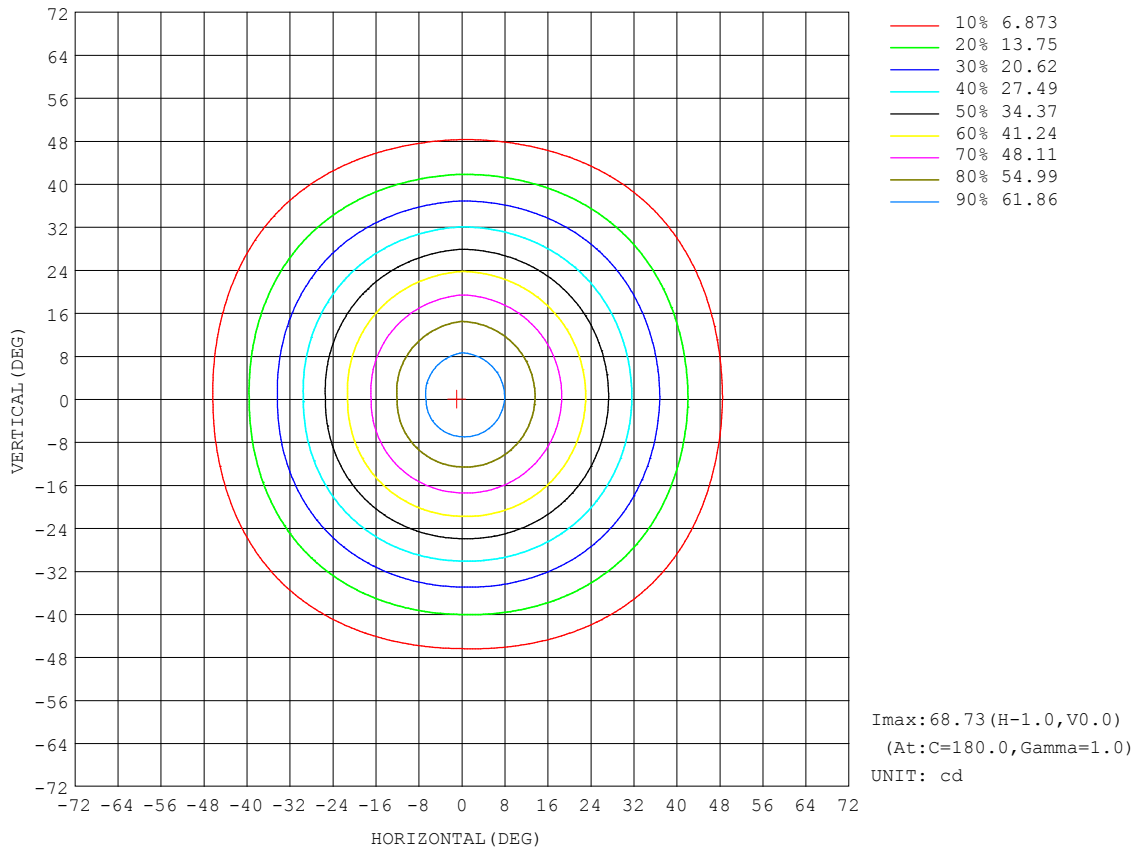


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-10-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.07V I:0.7822A P:6.482W PF:0.6868 Freq:59.97Hz Lamp Flux:61.296x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Path light RGBWW	WEIGHT:
SPEC.:7W 2700K Min beam angle	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-039

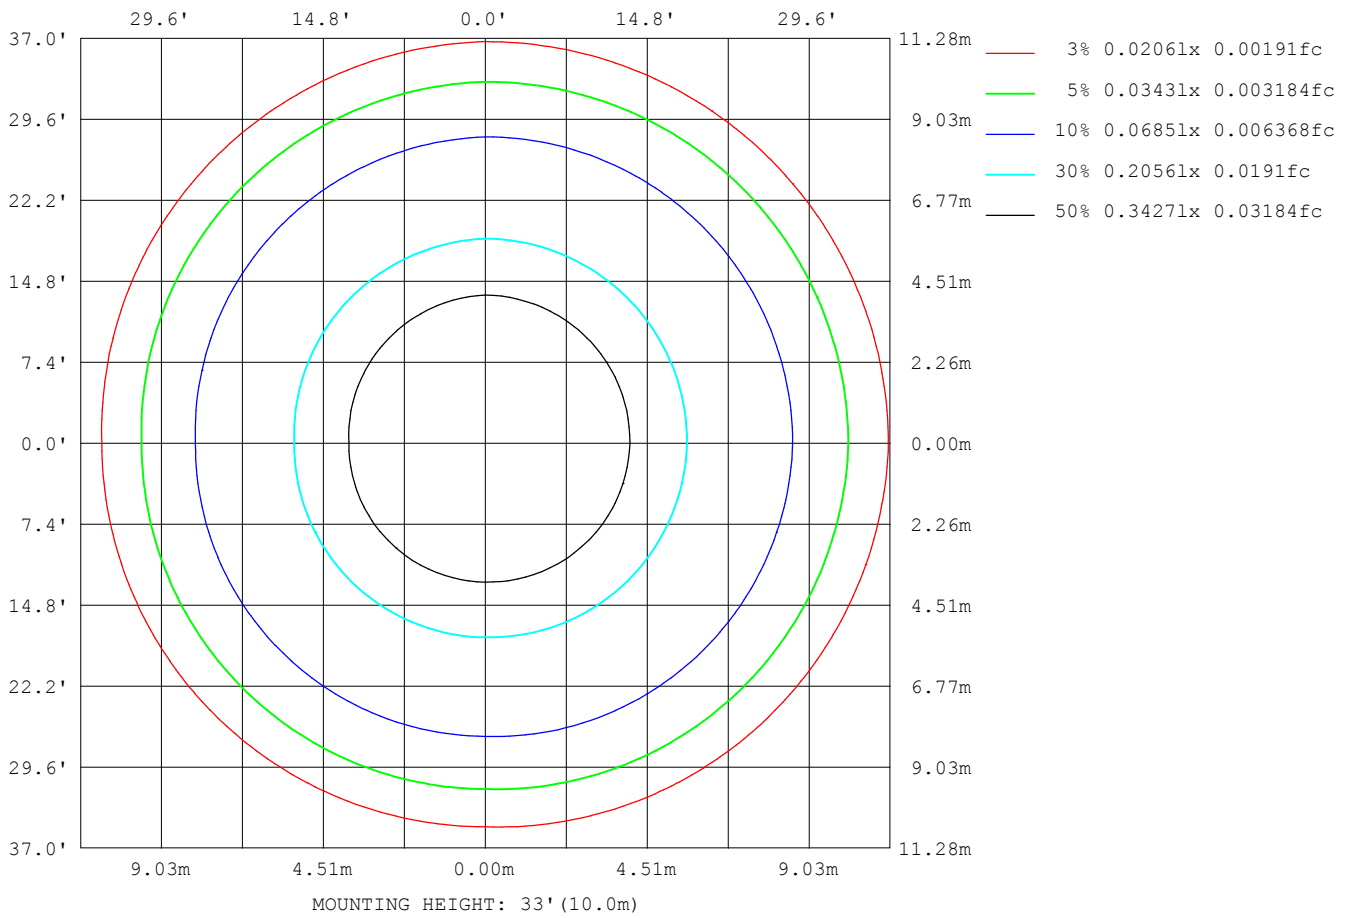

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-10-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

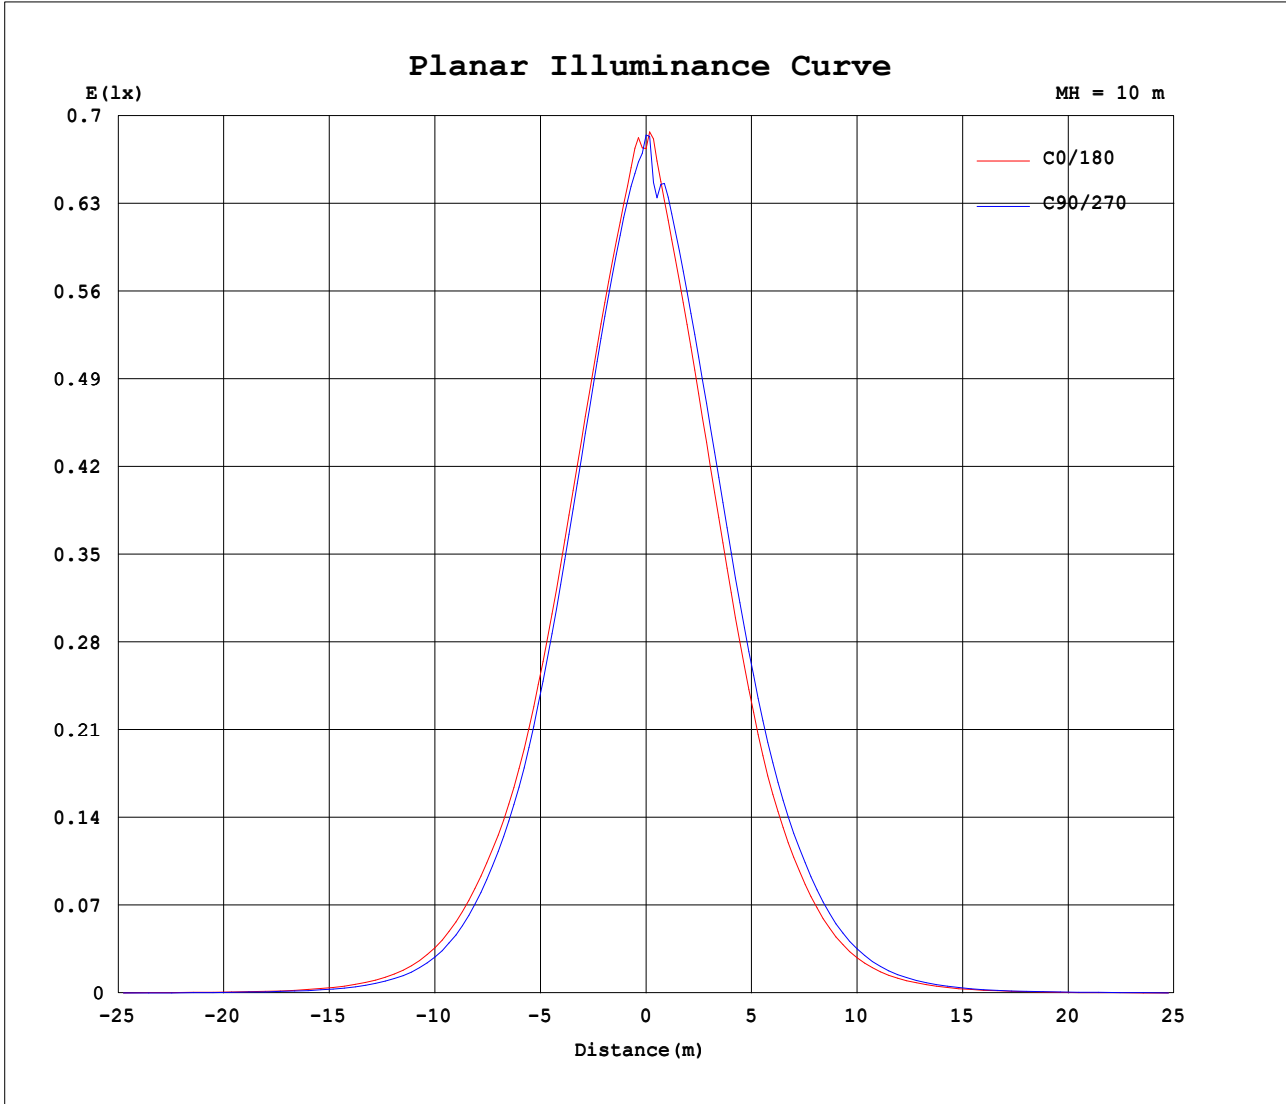


H(β) Range:-90 - 90DEG
 H(β) Interval: 0.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:ADMIN
 Test Date:2023-10-09

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
 Humidity:65.0%
 Test Distance:13.563m [K=1.0000]
 Remarks:

AAI Figure

Test:U:12.07V I:0.7822A P:6.482W PF:0.6868 Freq:59.97Hz Lamp Flux:61.296x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Path light RGBWW	WEIGHT:
SPEC.:7W 2700K Min beam angle	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-039

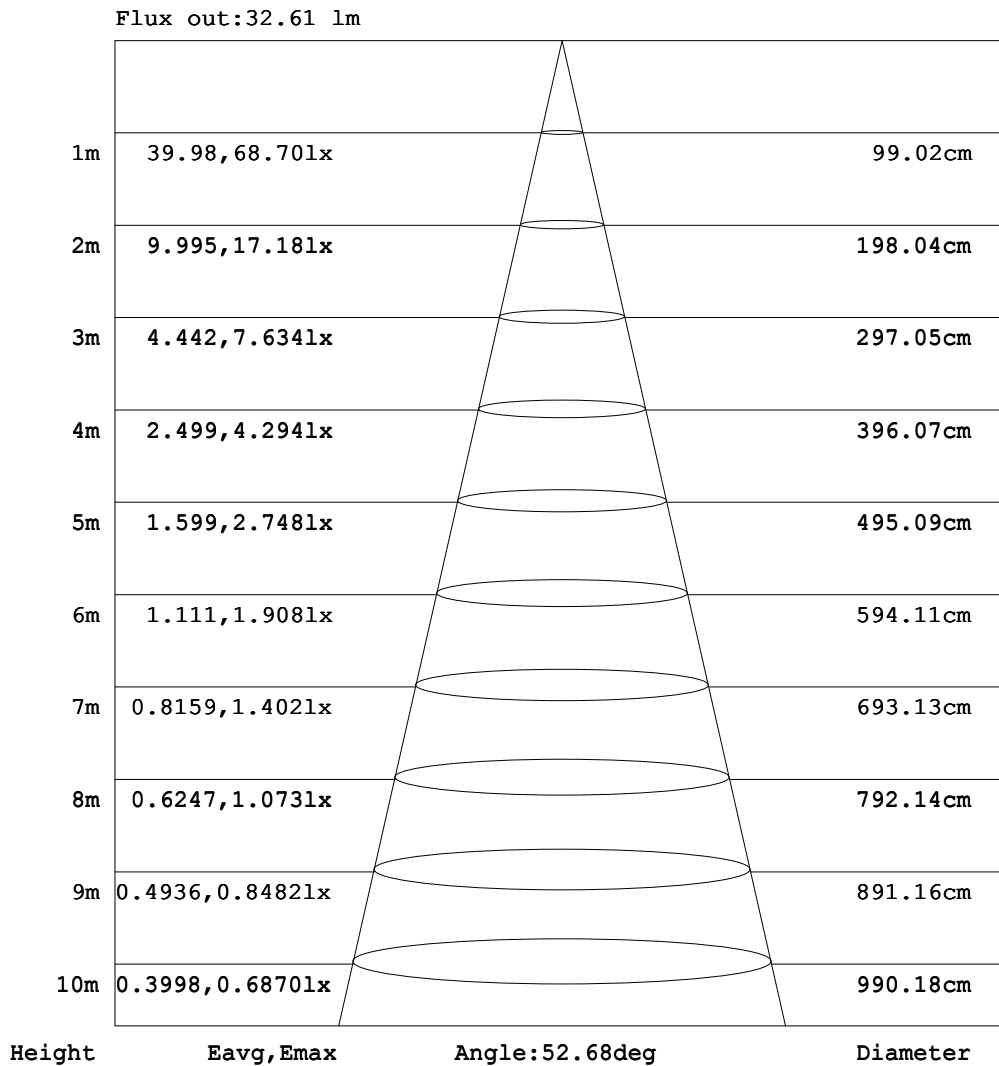

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-10-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.07V I:0.7822A P:6.482W PF:0.6868 Freq:59.97Hz Lamp Flux:61.296x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Path light RGBWW	WEIGHT:
SPEC.:7W 2700K Min beam angle	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-039

Table--1

UNIT: cd

H (DEG) \ V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.10	0.16	0.20	0.24	0.29	0.30
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.09	0.16	0.21	0.24	0.27	0.29
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.06	0.10	0.15	0.19	0.23	0.24
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.08	0.10	0.12	0.14
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.22	0.38	0.54	0.69	0.80	0.90	0.97	1.01	1.02
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.16	0.42	0.73	1.00	1.38	1.88	2.44	3.01	3.52	3.96	4.25	4.33
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.22	0.60	1.02	1.66	2.60	3.82	5.35	7.15	9.07	10.9	12.4	13.4	13.8
-30	0.00	0.00	0.00	0.00	0.00	0.15	0.55	1.05	1.94	3.35	5.37	8.20	11.8	15.7	19.5	22.7	25.2	27.0	27.7
-20	0.00	0.00	0.00	0.00	0.00	0.32	0.86	1.63	3.12	5.43	8.97	13.8	19.3	24.7	30.4	35.9	40.2	43.0	44.1
-10	0.00	0.00	0.00	0.00	0.00	0.45	1.04	2.15	4.09	7.25	12.1	18.2	24.7	32.2	39.9	46.8	52.6	56.7	58.3
0	0.00	0.00	0.00	0.00	0.00	0.48	1.09	2.37	4.49	7.96	13.2	19.7	26.7	35.0	43.3	50.9	57.7	64.0	67.4
10	0.00	0.00	0.00	0.00	0.01	0.46	1.06	2.21	4.20	7.44	12.4	18.6	25.2	32.9	40.7	47.8	53.8	58.1	60.3
20	0.00	0.00	0.00	0.00	0.00	0.34	0.89	1.72	3.30	5.74	9.45	14.5	20.2	25.9	32.0	37.7	42.4	45.6	47.2
30	0.00	0.00	0.00	0.00	0.00	0.17	0.59	1.13	2.12	3.66	5.86	8.94	12.8	17.0	21.1	24.6	27.6	29.7	30.8
40	0.00	0.00	0.00	0.00	0.00	0.01	0.26	0.66	1.12	1.86	2.95	4.35	6.12	8.18	10.4	12.5	14.3	15.6	16.2
50	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.20	0.50	0.83	1.16	1.65	2.29	2.99	3.71	4.38	4.96	5.37	5.57
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.14	0.31	0.52	0.68	0.86	1.00	1.14	1.26	1.35	1.40
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.05	0.08	0.11	0.14	0.15
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.07	0.12	0.13	0.12
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.05	0.13	0.17	0.19	0.19	0.17
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.10	0.16	0.20	0.24	0.29	0.29

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-10-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.07V I:0.7822A P:6.482W PF:0.6868 Freq:59.97Hz Lamp Flux:61.296x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Path light RGBWW	WEIGHT:
SPEC.:7W 2700K Min beam angle	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-039

Table--2

UNIT: cd

H (DEG) \ V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	0.29	0.28	0.26	0.18	0.16	0.12	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-170	0.29	0.27	0.22	0.19	0.17	0.11	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-160	0.23	0.21	0.18	0.17	0.11	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-150	0.14	0.12	0.10	0.04	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-140	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.02	0.02	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	1.03	1.00	0.93	0.85	0.74	0.62	0.44	0.29	0.15	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	4.33	4.12	3.73	3.24	2.68	2.10	1.56	1.13	0.82	0.52	0.24	0.04	0.00	0.00	0.00	0.00	0.00	0.00
-40	13.7	12.9	11.6	9.90	7.95	6.06	4.37	3.00	1.95	1.19	0.75	0.34	0.05	0.00	0.00	0.00	0.00	0.00
-30	27.3	25.9	23.7	20.8	17.3	13.4	9.60	6.36	3.98	2.34	1.28	0.72	0.25	0.00	0.00	0.00	0.00	0.00
-20	43.5	41.1	37.1	32.1	26.6	21.4	16.1	10.9	6.64	3.79	2.01	1.02	0.46	0.05	0.00	0.00	0.00	0.00
-10	57.2	53.6	48.4	41.9	34.6	27.3	21.0	14.8	9.08	5.10	2.68	1.27	0.61	0.12	0.00	0.00	0.00	0.00
0	65.1	59.4	53.2	46.0	38.1	30.0	23.0	16.4	10.2	5.71	2.98	1.40	0.68	0.14	0.00	0.00	0.00	0.00
10	58.7	54.9	49.4	42.8	35.4	27.8	21.4	15.1	9.27	5.21	2.74	1.29	0.63	0.12	0.00	0.00	0.00	0.00
20	46.1	43.3	39.0	33.7	27.8	22.3	16.8	11.3	6.94	3.97	2.09	1.05	0.48	0.00	0.00	0.00	0.00	0.00
30	30.1	28.2	25.6	22.4	18.6	14.4	10.3	6.85	4.28	2.51	1.35	0.76	0.27	0.00	0.00	0.00	0.00	0.00
40	15.9	14.8	13.2	11.2	8.99	6.82	4.90	3.35	2.15	1.29	0.81	0.38	0.06	0.00	0.00	0.00	0.00	0.00
50	5.46	5.12	4.59	3.94	3.22	2.50	1.83	1.29	0.92	0.60	0.29	0.05	0.00	0.00	0.00	0.00	0.00	0.00
60	1.37	1.29	1.17	1.05	0.91	0.76	0.58	0.38	0.20	0.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.15	0.13	0.09	0.06	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.01	0.02	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160	0.14	0.13	0.10	0.08	0.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
170	0.21	0.22	0.18	0.16	0.13	0.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
180	0.29	0.28	0.26	0.18	0.16	0.12	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-10-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: