

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		2428.7 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	57.5V x 59.4H
	At 50% of Imax	36.5V x 36.6H
	At 90% of Imax	17.9V x 17.7H
Beam Flux	Total	1000.4 lumens per klm.
	To 10% of Imax	880.8 lumens per klm.
	To 50% of Imax	588.1 lumens per klm.
	To 90% of Imax	176.4 lumens per klm.
	Upward LOR	1.4 %
	Downward LOR	98.6 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-27

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.05V I:1.334A P:11.57W PF:0.7197 Freq:59.97Hz Lamp Flux:709.255x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot light CW	WEIGHT:
SPEC.:12W 2700K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:UP-LIGHT SHROUD

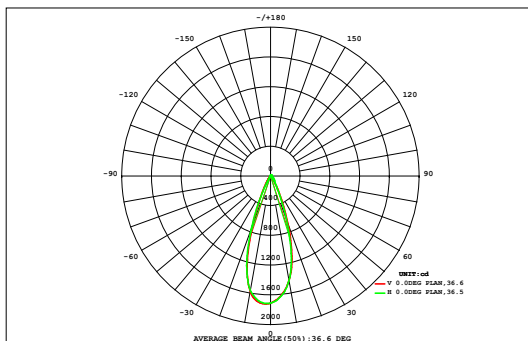

DATA OF LAMP		Eff:61.31lm/W	
MODEL	D7A1-12W-BZ	Imax (cd)	1723
NOMINAL POWER (W)	12	AVAILABILITY (%)	87.6
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	621.5
NOMINAL FLUX (lm)	709.255	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	709.3
TEST VOLTAGE (V)	12	θ @50% (H,V)	37,37DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.04	0.06	0.10	0.15	0.20	0.26	0.32	0.36	0.40	0.40	0.36	0.31	0.25	0.20	0.14	0.10	0.06	0.03	3.74	0.00
45	0.04	0.06	0.10	0.15	0.20	0.26	0.32	0.36	0.40	0.40	0.36	0.31	0.25	0.20	0.14	0.10	0.06	0.03	3.74	0.00
40	0.05	0.09	0.14	0.21	0.30	0.39	0.48	0.56	0.61	0.61	0.56	0.48	0.39	0.29	0.21	0.14	0.09	0.05	5.66	0.00
35	0.07	0.12	0.20	0.31	0.44	0.60	0.75	0.89	0.96	0.96	0.88	0.74	0.58	0.43	0.30	0.20	0.12	0.06	8.62	0.00
30	0.09	0.16	0.27	0.44	0.65	0.93	1.24	1.54	1.73	1.73	1.55	1.25	0.92	0.64	0.42	0.27	0.16	0.08	14.1	7.05
25	0.11	0.21	0.36	0.61	0.98	1.53	2.27	3.01	3.45	3.46	3.03	2.31	1.57	0.98	0.59	0.35	0.20	0.10	25.1	20.6
20	0.13	0.26	0.47	0.84	1.49	2.61	4.14	5.61	6.41	6.37	5.55	4.15	2.67	1.54	0.83	0.45	0.24	0.12	43.9	40.3
15	0.15	0.30	0.59	1.13	2.20	4.14	6.66	8.73	9.63	9.51	8.45	6.46	4.15	2.28	1.14	0.56	0.28	0.14	66.5	63.4
10	0.16	0.33	0.69	1.41	2.95	5.74	8.93	11.0	11.8	11.5	10.5	8.40	5.57	3.04	1.46	0.66	0.31	0.15	84.7	81.8
5	0.16	0.35	0.75	1.59	3.48	6.80	10.2	12.2	12.8	12.5	11.4	9.40	6.45	3.55	1.67	0.73	0.32	0.15	94.6	92.0
0	0.16	0.34	0.73	1.58	3.51	6.90	10.4	12.4	13.0	12.7	11.6	9.55	6.55	3.59	1.66	0.71	0.31	0.14	95.8	93.2
-5	0.14	0.29	0.63	1.36	3.02	6.01	9.34	11.5	12.4	12.2	11.0	8.82	5.84	3.11	1.41	0.60	0.27	0.13	88.1	85.4
-10	0.11	0.23	0.49	1.02	2.20	4.42	7.26	9.54	10.7	10.5	9.26	7.05	4.43	2.28	1.04	0.46	0.22	0.10	71.3	68.4
-15	0.09	0.17	0.35	0.68	1.37	2.69	4.59	6.43	7.53	7.49	6.37	4.60	2.75	1.41	0.67	0.32	0.16	0.08	47.8	44.5
-20	0.06	0.12	0.23	0.42	0.75	1.35	2.27	3.28	3.96	3.97	3.31	2.31	1.39	0.75	0.40	0.21	0.11	0.05	24.9	20.9
-25	0.04	0.08	0.14	0.23	0.39	0.61	0.91	1.25	1.47	1.48	1.26	0.92	0.60	0.37	0.22	0.13	0.07	0.03	10.2	3.94
-30	0.02	0.05	0.08	0.12	0.18	0.27	0.35	0.42	0.45	0.45	0.42	0.34	0.25	0.17	0.11	0.07	0.04	0.02	3.83	0.00
-35	0.01	0.03	0.04	0.06	0.08	0.11	0.13	0.14	0.14	0.13	0.14	0.12	0.10	0.08	0.05	0.03	0.02	0.01	1.42	0.00
-40	0.01	0.01	0.02	0.03	0.04	0.04	0.04	0.04	0.03	0.03	0.04	0.04	0.04	0.03	0.02	0.02	0.01	0.00	0.47	0.00
-45	0.01	0.01	0.02	0.03	0.04	0.04	0.04	0.04	0.03	0.03	0.04	0.04	0.04	0.03	0.02	0.02	0.01	0.00	0.47	0.00
	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)	10	15	20	25	30	35	40	45			
Φ t	1.61	3.21	6.26	12.2	24.3	45.4	70.3	89.0	97.4	96.1	85.7	67.3	44.5	24.7	12.3	6.00	2.99	1.48	691	---
Φ a	0.00	0.00	0.00	6.02	19.8	41.6	66.9	85.7	94.3	93.0	82.5	63.9	40.8	20.5	6.62	0.00	0.00	0.00	---	622

one-half-peak spread: U:17.2,D:19.5 , L:15.6,R:21.2


NEMA Beam Type: Type 4

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-27

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.05V I:1.334A P:11.57W PF:0.7197 Freq:59.97Hz Lamp Flux:709.255x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot light CW	WEIGHT:
SPEC.:12W 2700K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:UP-LIGHT SHROUD

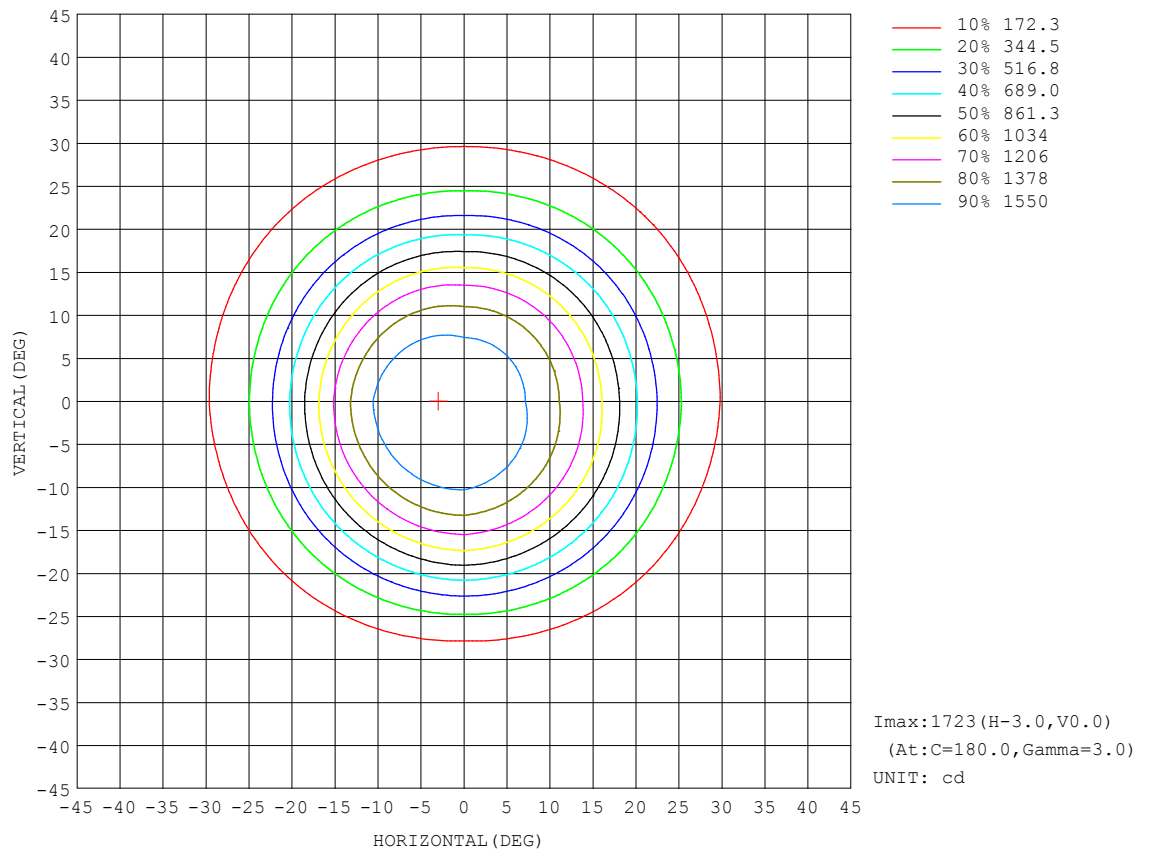


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-27

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.05V I:1.334A P:11.57W PF:0.7197 Freq:59.97Hz Lamp Flux:709.255x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot light CW	WEIGHT:
SPEC.:12W 2700K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:UP-LIGHT SHROUD

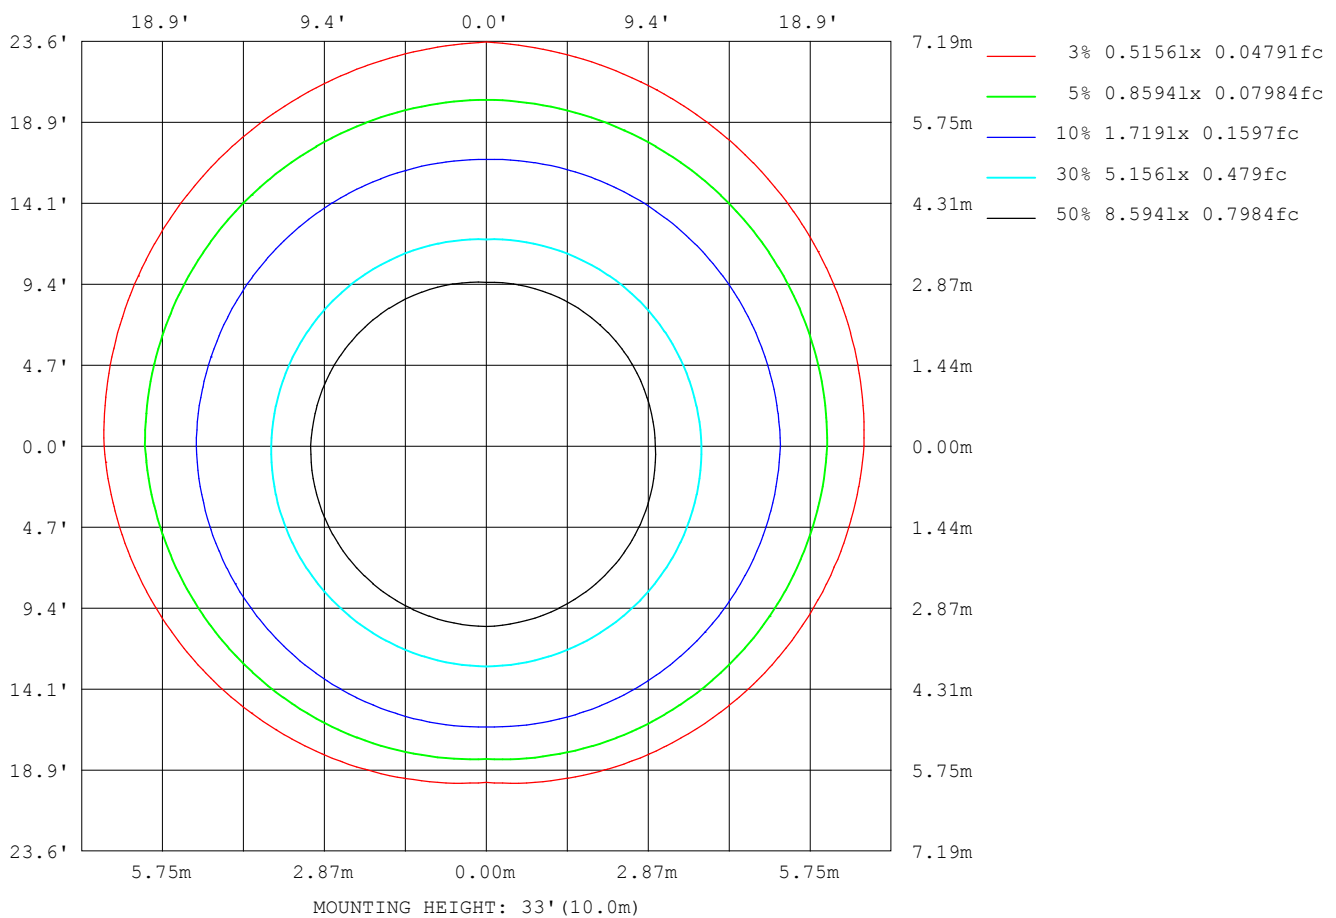

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-27

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

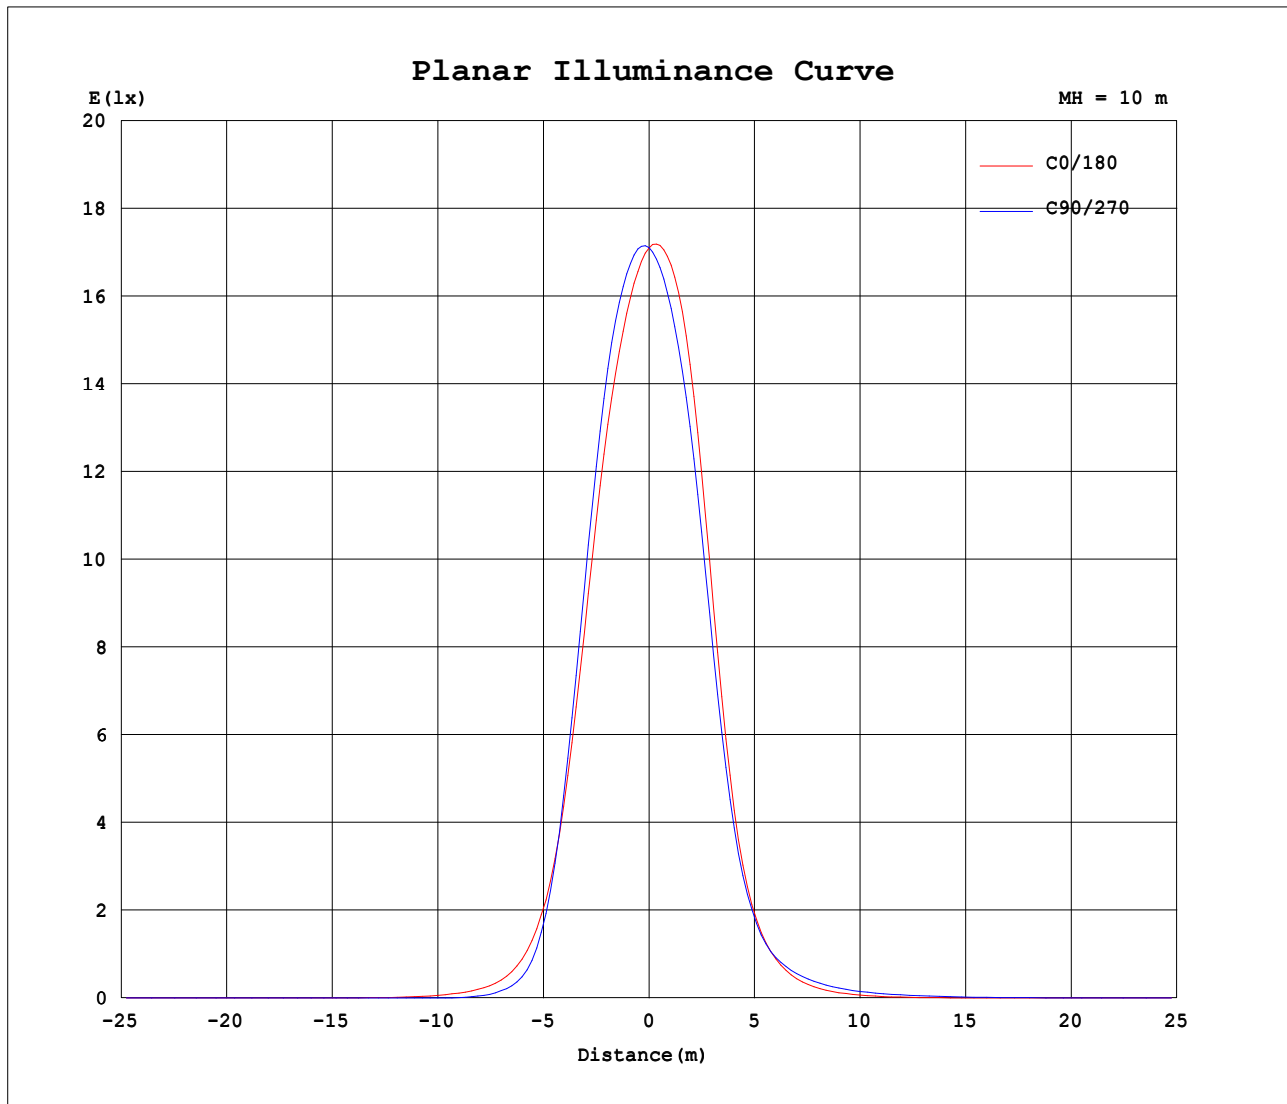


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-27

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.05V I:1.334A P:11.57W PF:0.7197 Freq:59.97Hz Lamp Flux:709.255x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot light CW	WEIGHT:
SPEC.:12W 2700K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:UP-LIGHT SHROUD

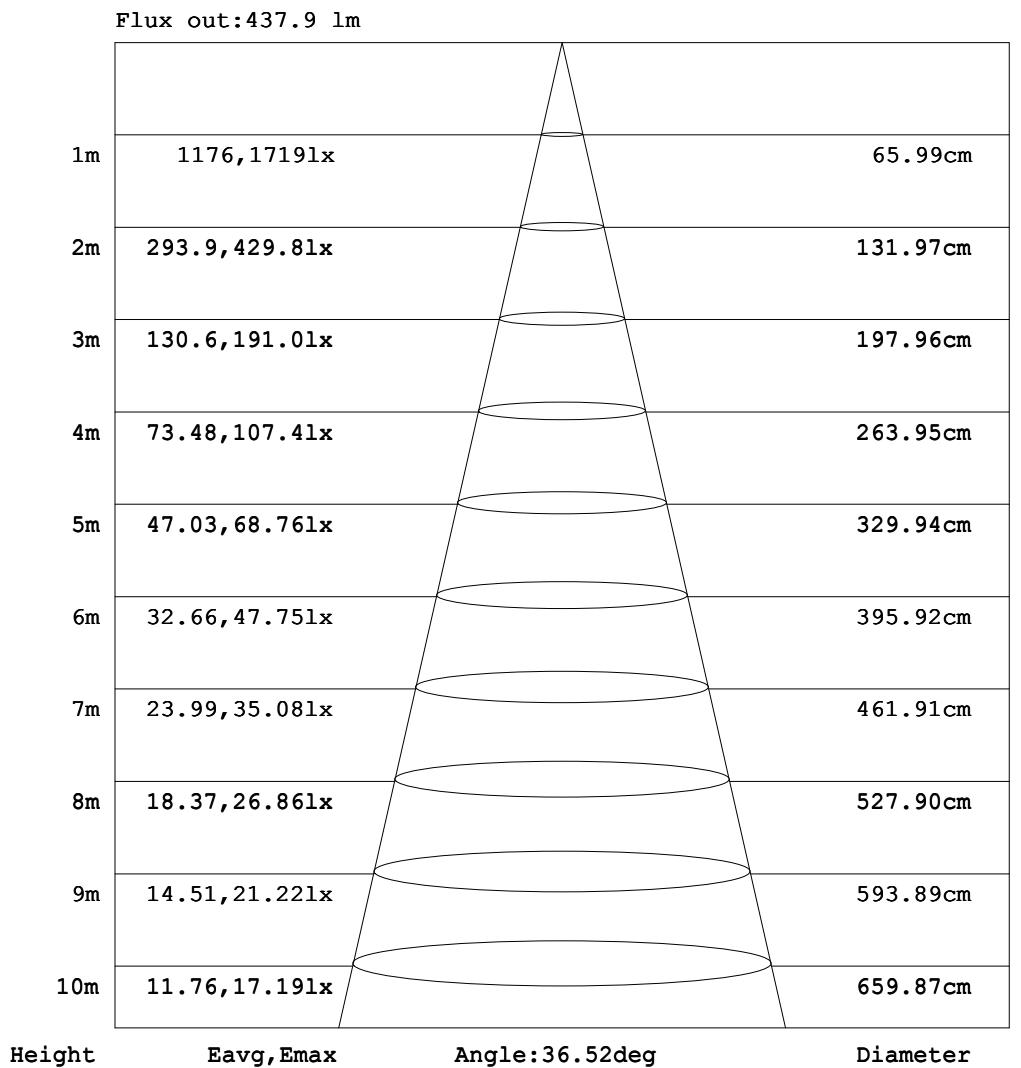

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-27

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.05V I:1.334A P:11.57W PF:0.7197 Freq:59.97Hz Lamp Flux:709.255x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot light	CW WEIGHT:
SPEC.:12W 2700K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:UP-LIGHT SHROUD

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.20	0.63	1.37	2.50	3.90	5.47	7.01	8.33	9.35	10.1	10.4
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.20	0.65	1.38	2.47	3.84	5.37	6.91	8.29	9.31	9.99	10.4
-160	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.06	0.15	0.48	1.05	1.90	2.98	4.24	5.54	6.75	7.78	8.57	9.04
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.05	0.11	0.26	0.60	1.12	1.78	2.59	3.46	4.30	5.04	5.61	5.96
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.08	0.14	0.25	0.46	0.78	1.17	1.59	2.03	2.42	2.75	2.95
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.06	0.11	0.17	0.26	0.38	0.51	0.65	0.79	0.92	1.00
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.07	0.10	0.14	0.17	0.21	0.24	0.26
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.06	0.06	0.06	0.07	0.07	0.07	0.05	0.04	0.02	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.01	0.09	0.11	0.17	0.18	0.21	0.20	0.23	0.20	0.19	0.17	0.13	0.07	0.00
-50	0.00	0.00	0.00	0.00	0.03	0.12	0.20	0.27	0.32	0.37	0.52	0.75	1.06	1.33	1.47	1.40	1.09	0.60	0.00
-40	0.00	0.00	0.00	0.00	0.12	0.23	0.33	0.45	0.67	1.27	2.36	3.74	5.17	6.73	7.99	9.17	9.63	9.09	6.94
-30	0.00	0.00	0.00	0.04	0.17	0.32	0.50	0.82	1.92	4.10	7.30	12.4	19.6	30.5	46.1	63.5	82.8	98.2	99.6
-20	0.00	0.00	0.00	0.12	0.26	0.40	0.66	1.63	4.27	8.90	17.5	31.9	58.6	105	193	347	542	704	770
-10	0.00	0.00	0.00	0.13	0.29	0.50	0.92	2.70	6.90	15.4	30.5	60.7	121	252	527	940	1310	1510	1564
0	0.00	0.00	0.00	0.13	0.31	0.58	1.08	3.31	8.53	19.7	39.6	80.7	163	342	712	1222	1580	1711	1710
10	0.00	0.01	0.02	0.16	0.36	0.71	1.45	3.90	9.29	19.8	37.8	71.5	134	258	503	879	1229	1411	1434
20	0.00	0.01	0.03	0.18	0.39	0.73	1.50	3.51	8.02	15.6	28.9	49.3	82.4	133	214	338	483	600	634
30	0.00	0.02	0.05	0.13	0.33	0.68	1.35	2.66	5.61	10.7	18.2	29.5	44.5	64.1	88.1	114	139	157	164
40	0.00	0.02	0.06	0.11	0.29	0.54	0.98	1.82	3.29	5.95	10.1	15.5	22.2	30.3	39.1	48.0	56.0	62.4	66.1
50	0.00	0.03	0.06	0.11	0.21	0.38	0.64	1.05	1.74	2.81	4.43	6.71	9.66	13.1	16.6	20.1	23.3	25.9	27.7
60	0.00	0.03	0.06	0.11	0.17	0.26	0.43	0.57	0.83	1.17	1.68	2.33	3.21	4.17	5.25	6.34	7.36	8.21	8.84
70	0.00	0.03	0.07	0.11	0.15	0.21	0.28	0.36	0.46	0.60	0.70	0.82	0.98	1.14	1.33	1.52	1.70	1.85	1.96
80	0.00	0.03	0.07	0.10	0.14	0.18	0.22	0.27	0.32	0.37	0.43	0.49	0.55	0.61	0.67	0.73	0.79	0.85	0.90
90	0.00	0.03	0.06	0.09	0.12	0.15	0.18	0.22	0.25	0.28	0.31	0.34	0.37	0.40	0.43	0.46	0.49	0.52	0.55
100	0.00	0.03	0.06	0.08	0.10	0.11	0.13	0.14	0.15	0.16	0.16	0.17	0.17	0.18	0.19	0.20	0.21	0.22	0.23
110	0.00	0.03	0.05	0.06	0.07	0.07	0.07	0.07	0.06	0.05	0.03	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.02	0.04	0.04	0.05	0.04	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.02	0.03	0.03	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.02	0.01	0.00
140	0.00	0.02	0.02	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.14	0.34	0.56	0.79	0.99	1.14	1.18
150	0.00	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.04	0.19	0.53	1.01	1.63	2.30	2.94	3.46	3.80	3.92
160	0.00	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.03	0.23	0.67	1.38	2.32	3.42	4.54	5.56	6.36	6.84	7.00
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.12	0.49	1.15	2.17	3.47	4.90	6.33	7.55	8.42	8.93	9.02
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.20	0.63	1.37	2.50	3.90	5.47	7.01	8.33	9.35	10.1	10.4

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-27

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.05V I:1.334A P:11.57W PF:0.7197 Freq:59.97Hz Lamp Flux:709.255x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot light	CW WEIGHT:
SPEC.:12W 2700K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:UP-LIGHT SHROUD

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	10.4	10.2	9.85	8.98	7.60	6.03	4.43	2.92	1.69	0.80	0.30	0.04	0.00	0.00	0.00	0.00	0.00	0.00	
-170	10.3	10.0	9.47	8.41	7.04	5.53	4.02	2.65	1.52	0.75	0.29	0.03	0.00	0.00	0.00	0.00	0.00	0.00	
-160	8.89	8.42	7.66	6.66	5.48	4.23	3.02	1.95	1.09	0.53	0.20	0.02	0.01	0.00	0.00	0.00	0.00	0.00	
-150	5.84	5.49	4.93	4.22	3.40	2.56	1.77	1.10	0.63	0.30	0.08	0.02	0.00	0.00	0.00	0.00	0.00	0.00	
-140	2.88	2.67	2.36	1.98	1.55	1.13	0.77	0.49	0.25	0.09	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
-130	0.96	0.88	0.77	0.64	0.51	0.36	0.24	0.12	0.06	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.24	0.21	0.17	0.14	0.10	0.07	0.04	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.02	0.03	0.04	0.05	0.06	0.06	0.05	0.04	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.05	0.09	0.13	0.16	0.19	0.20	0.20	0.19	0.16	0.13	0.09	0.05	0.01	0.00	0.00	0.00	0.00	0.00	
-50	0.48	0.86	1.06	1.05	0.90	0.67	0.51	0.38	0.35	0.30	0.23	0.16	0.09	0.02	0.00	0.00	0.00	0.00	
-40	8.85	9.23	8.69	7.46	5.89	4.27	2.88	1.62	0.84	0.50	0.40	0.29	0.18	0.08	0.00	0.00	0.00	0.00	
-30	98.5	82.4	62.0	43.8	28.6	18.4	11.4	6.02	3.02	1.22	0.59	0.43	0.29	0.14	0.03	0.00	0.00	0.00	
-20	703	546	354	199	104	54.8	29.7	16.2	7.33	3.06	1.08	0.56	0.38	0.20	0.06	0.00	0.00	0.00	
-10	1467	1251	910	537	264	120	56.2	28.5	13.6	5.41	1.74	0.68	0.45	0.25	0.08	0.00	0.00	0.00	
0	1616	1432	1117	702	359	166	74.9	36.8	18.0	6.90	2.18	0.78	0.49	0.27	0.09	0.00	0.00	0.00	
10	1369	1170	849	513	270	133	66.9	35.8	18.0	7.80	2.95	1.21	0.66	0.32	0.11	0.02	0.01	0.00	
20	599	488	345	220	132	78.7	47.1	27.7	14.1	6.82	2.96	1.40	0.71	0.33	0.12	0.03	0.01	0.00	
30	157	138	113	85.9	62.2	43.3	28.5	16.9	9.64	4.92	2.44	1.28	0.64	0.30	0.12	0.05	0.02	0.00	
40	62.2	55.6	47.5	38.6	29.5	21.3	14.7	9.35	5.51	3.11	1.77	0.95	0.50	0.25	0.11	0.06	0.02	0.00	
50	25.8	23.1	19.8	16.2	12.6	9.28	6.48	4.29	2.80	1.71	1.02	0.60	0.36	0.20	0.11	0.06	0.03	0.00	
60	8.20	7.33	6.30	5.22	4.16	3.18	2.33	1.66	1.16	0.80	0.56	0.39	0.26	0.17	0.11	0.06	0.03	0.00	
70	1.84	1.69	1.51	1.32	1.12	0.97	0.81	0.68	0.57	0.46	0.36	0.28	0.21	0.15	0.11	0.07	0.03	0.00	
80	0.85	0.79	0.73	0.67	0.61	0.55	0.49	0.43	0.37	0.32	0.27	0.22	0.18	0.14	0.10	0.07	0.03	0.00	
90	0.52	0.49	0.46	0.43	0.40	0.37	0.34	0.31	0.28	0.25	0.22	0.18	0.15	0.12	0.09	0.06	0.03	0.00	
100	0.22	0.21	0.20	0.19	0.18	0.17	0.17	0.16	0.16	0.15	0.14	0.13	0.11	0.10	0.08	0.06	0.03	0.00	
110	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.03	0.05	0.06	0.07	0.07	0.07	0.07	0.06	0.05	0.03	0.00	
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.04	0.05	0.04	0.04	0.02	0.00	
130	0.06	0.11	0.14	0.14	0.13	0.10	0.07	0.01	0.00	0.00	0.00	0.00	0.01	0.02	0.03	0.03	0.02	0.00	
140	1.27	1.24	1.13	0.94	0.73	0.49	0.37	0.24	0.11	0.01	0.00	0.00	0.00	0.01	0.02	0.02	0.02	0.00	
150	4.03	3.91	3.57	3.05	2.44	1.79	1.19	0.69	0.41	0.19	0.02	0.00	0.00	0.00	0.01	0.01	0.01	0.00	
160	7.16	6.99	6.47	5.67	4.66	3.57	2.50	1.57	0.84	0.41	0.14	0.00	0.00	0.00	0.01	0.01	0.01	0.00	
170	9.23	9.13	8.73	7.83	6.58	5.16	3.73	2.43	1.37	0.67	0.26	0.02	0.00	0.00	0.00	0.00	0.00	0.00	
180	10.4	10.2	9.85	8.98	7.60	6.03	4.43	2.92	1.69	0.80	0.30	0.04	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-27

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: