



Together, we are brighter.

N8B3-3W-30K-30-BK

PROJECT: _____

TYPE: _____

CAT #: _____


DESCRIPTION

Nano, LumienPRO - RGBW, Brass - Black, Knuckle, 3W, 3000K: 104 Lm, R: 37 Lm, G: 110 Lm, B: 37 Lm, 30°, 10-15V


SPECIFICATIONS

Construction	Brass
Finish	Black
Lead Wire	6'
Voltage	10-15V
Light Warranty	10 Years
Housing Warranty	Lifetime

FINISHES



NOTES

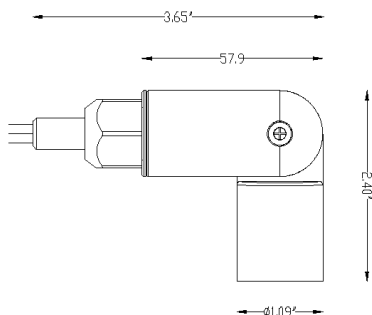

Lumien Lighting

770-485-9002
orders@lumienlighting.com
www.lumienlighting.com

Lumien Lighting reserves the right to modify product specifications without notification. © 2023 Lumien Enterprise Inc.

MODULE TYPE (required)	WATTS	COLOR TEMP	BEAM SPREAD	FINISH	ACCESSORIES
---------------------------	-------	---------------	----------------	--------	-------------

N8B3-3W-30K-30-1-K

CORE: N4B3

-

-

-

-

3W

2700K
3000K

15°
30°

A

+

N8B3-3W-30K-30-1-K

PRO: N7B3

-

-

-

-

3W

2700-5700K

30°

A
BK

+

N8B3-3W-30K-30-1-K

PRO: N8B3

-

-

-

-

3W

2700-5700K

30°

A
BK

+

CORE

N4B3-3W-27K-15-A
N4B3-3W-27K-30-A
N4B3-3W-30K-15-A
N4B3-3W-30K-30-A

PRO

N7B3-3W-30-A
N7B3-3W-30-BK

PRO

N8B3-3W-27K-30-A
N8B3-3W-27K-30-BK
N8B3-3W-30K-30-A
N8B3-3W-30K-30-BK

Construction	Brass	Brass	Brass
Finish	Antique	Antique, Black	Antique, Black
Input Voltage	10-15V	10-15V	10-15V
Wattage (Volt Amps)	3W (5.2)	3W (4.81)	3W (4.81)
Module Lumens	167 Lm, 237 Lm, 183 Lm,	132-146 Lm	27K: 105 Lm, R: 27 Lm, G:
Color Temperature	2700K, 3000K	2700-5700K	2700-5700K
Beam Spread	15°, 30°	30°	30°
Lead Wire Length	6'	6'	6'
CRI	80+	80+	80+
RGB	No	No	Yes
Dimmable	Primary Dimming	With LumienPRO Remote	With LumienPRO Remote
Rated Life	50,000 Hrs	50,000 Hrs	50,000 Hrs
Warranty	10 Years	10 Years	10 Years
Core Drill Size	-	-	-