


D5A1-8W-30K-BZ

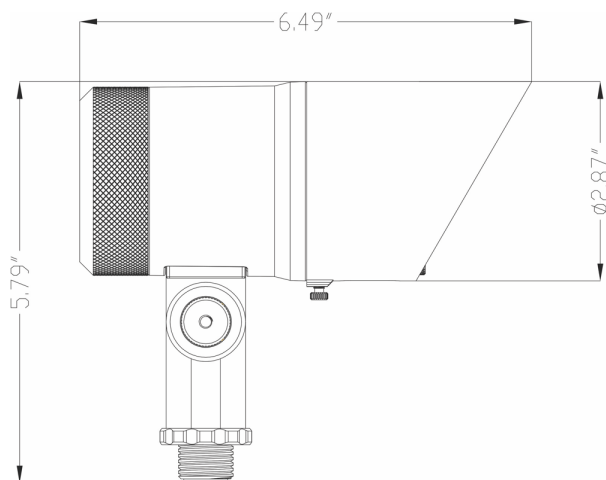

PROJECT: _____

TYPE: _____

CAT #: _____

DESCRIPTION

Directional, Integrated Variable - Standard Dimming, Aluminum - Bronze, Deco Aluminum Series Uplight (Includes 40° Optic & Hex Louver), 8W, 640 Lm, 3000K, 10-15V

SPECIFICATIONS

Construction	Aluminum
Finish	Bronze
Lead Wire	6'
Voltage	10-15V
Mounting	LAP-002 (8" Stake)
Light Warranty	10 Years
Housing Warranty	10 Years

FINISHES



Bronze

NOTES

Lumien Lighting

770-485-9002
orders@lumienlighting.com
www.lumienlighting.com

Lumien Lighting reserves the right to modify product specifications without notification. © 2023 Lumien Enterprise Inc.

	MODULE TYPE (required)	WATTS	COLOR TEMP	BEAM SPREAD	FINISH	ACCESSORIES
D5A1-8W-30K-BZ	CORE: D5A1	15W 8W	2700K 3000K	40°	BK BZ	Accessories - Included Lens (Optional) LAA-022 BK Aluminum, Banded Hex Louver LAP-011 Plastic, Macro, 40° Optic Lens Accessories - Lens (Optional) LAG-005 Glass, Mercury Vapor Lens for Deco LAP-010 Plastic, Macro, 15° Optic Lens LAP-012 Plastic, Macro, 60° Optic Lens LAP-013 Plastic, Macro/Deco, 80° Optic Lens LAP-016 Plastic, Macro/Deco, Asymmetrical Additional Mounts - Gutter Mount (Optional) LAA-021 BZ Stainless Steel, Gutter Mount Bracket LAA-021-BK BK Stainless Steel, Gutter Mount Bracket Additional Mounts - Ground (Optional) LAS-002 Stainless Steel, Trident Stake, 12" LAS-002-6 Stainless Steel, Trident Stake, 6" LAS-003 Stainless Steel, 1/2" Threaded Mini Stake, LAP-001 Plastic, 1/2" Threaded 12" Spike LAP-005 Plastic, 1/2" Threaded 15" Commercial LAP-018 Plastic, 1/2" Threaded 8" Spike w/ ADJ Additional Mounts - Surface Mount (Optional) LAA-001 BZ Aluminum, 1/2" Threaded Base LAA-001-BK BK Aluminum, 1/2" Threaded Base LAA-002 BZ Aluminum, 1/2" Threaded J-Box LAA-002-BK BK Aluminum, 1/2" Threaded J-Box Secondary Mounts - Risers (Optional) LAA-008 BZ Aluminum, 1/2" ADJ 16-25" Riser LAA-008-BK BK Aluminum, 1/2" ADJ 16-25" Riser LAA-020 BZ Aluminum, 1/2" Threaded 4" Riser LAA-020-BK BK Aluminum, 1/2" Threaded 4" Riser LAA-005 BZ Aluminum, 1/2" Threaded 8" Riser LAA-005-BK BK Aluminum, 1/2" Threaded 8" Riser LAA-006 BZ Aluminum, 1/2" Threaded 16" Riser LAA-006-BK BK Aluminum, 1/2" Threaded 16" Riser LAA-007 BZ Aluminum, 1/2" Threaded 24" Riser LAA-007-BK BK ALuminum, 1/2" Threaded 24" Riser Secondary Mounts - Riser Accessories (Optional) LAA-003 BZ Aluminum, 1/2" Threaded L-Mount LAA-003-BK BK Aluminum, 1/2" Threaded L-Mount LAA-004 BZ Aluminum, 1/2" Threaded T-Mount LAA-004-BK BK Aluminum, 1/2" Threaded T-Mount Accessories - Pro Series (Optional) LP-REMOTE LumienPRO Remote
D5A1-8W-30K-BZ	PRO: D7A1	12W	2700-5700K	40°	BK BZ	
D5A1-8W-30K-BZ	PRO: D9A1	12W	2700-5700K	40°	BK BZ	

	CORE	CORE	PRO	PRO
	D5A1-8W-27K-BK D5A1-8W-27K-BZ D5A1-8W-30K-BK D5A1-8W-30K-BZ	D5A1-15W-27K-BK D5A1-15W-27K-BZ D5A1-15W-30K-BK D5A1-15W-30K-BZ	D7A1-12W-BK D7A1-12W-BZ	D9A1-12W-BK D9A1-12W-BZ
Construction	Aluminum	Aluminum	Aluminum	Aluminum
Finish	Black, Bronze	Bronze, Black	Black, Bronze	Black, Bronze
Input Voltage	10-15V	10-15V	10-15V	10-15V
Wattage (Volt Amps)	8W (8.79)	15W (15.12)	12W (17.18)	12W (17.28)
Module Lumens	640 Lm	1100 Lm, 1200 Lm	709-830 Lm	27K-57K: 470-610 Lm, R:
Color Temperature	2700K, 3000K	2700K, 3000K	2700-5700K	2700-5700K
Beam Spread	40°	40°	40°	40°
Lead Wire Length	6'	6'	6'	6'
CRI	80+	80+	80+	80+
RGB	No	No	No	Yes
Dimmable	Primary Dimming	Primary Dimming	With LumienPRO Remote	With LumienPRO Remote
Rated Life	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Warranty	10 Years	10 Years	10 Years	10 Years
Core Drill Size	-	-	-	-

Accessories - Included Lens



LAA-022

Accessory, Aluminum -
Black, Banded Hex Louver
(Compatible with Deco
Aluminum & Brass Series)



LAP-011

Accessory, Plastic, Macro,
40° Optic Lens

Accessories - Lens



LAG-005

Accessory, Glass, Mercury
Vapor Lens for Deco
Aluminum Series



LAP-010

Accessory, Plastic, Macro,
15° Optic Lens




LAP-012

Accessory, Plastic, Macro,
60° Optic Lens



LAP-013


Accessory, Plastic, Macro,
80° Optic Lens (Compatible
with the Deco Aluminum
Series)



LAP-016

Accessory, Plastic, Macro,
Asymmetrical Optic Lens
(Compatible with the Deco
Aluminum & Brass Series)

Additional Mounts - Gutter Mount



LAA-021

Accessory, Stainless Steel -
Bronze, Gutter Mount
Bracket

LAA-021-BK

Accessory, Stainless Steel -
Black, Gutter Mount
Bracket

Additional Mounts - Ground



LAS-002

Accessory, Stainless Steel,
Trident Stake, 12"



LAS-002-6

Accessory, Stainless Steel,
Trident Stake, 6"



LAS-003

Accessory, Stainless Steel,
1/2" Threaded Mini Stake, 6"



LAP-001

Accessory, Plastic, 1/2"
Threaded 12" Spike



LAP-005

Accessory, Plastic, 1/2"
Threaded 15" Commercial
Spike



LAP-018

Accessory, Plastic, 1/2"
Threaded 8" Spike with
Adjustable Collar

Additional Mounts - Surface Mount



LAA-001

Accessory, Aluminum -
Bronze, 1/2" Threaded Base



LAA-001-BK

Accessory, Aluminum -
Black, 1/2" Threaded Base



LAA-002

Accessory, Aluminum -
Bronze, 1/2" Threaded
Junction Box



LAA-002-BK

Accessory, Aluminum -
Black, 1/2" Threaded
Junction Box

Secondary Mounts - Risers



LAA-008

Accessory, Aluminum -
Bronze, 1/2" Adjustable
16-25" Riser




LAA-008-BK

Accessory, Aluminum -
Black, 1/2" Adjustable
16-25" Riser



LAA-020

Accessory, Aluminum -
Bronze, 1/2" Threaded 4"
Riser



LAA-020-BK

Accessory, Aluminum -
Black, 1/2" Threaded 4"
Riser



LAA-005

Accessory, Aluminum -
Bronze, 1/2" Threaded 8"
Riser



LAA-005-BK

Accessory, Aluminum -
Black, 1/2" Threaded 8"
Riser




LAA-006

Accessory, Aluminum -
Bronze, 1/2" Threaded 16"
Riser

LAA-006-BK

Accessory, Aluminum -
Black, 1/2" Threaded 16"
Riser



LAA-007

Accessory, Aluminum -
Bronze, 1/2" Threaded 24"
Riser

LAA-007-BK

Accessory, Aluminum -
Black, 1/2" Threaded 24"
Riser

Secondary Mounts - Riser Accessories



LAA-003

Accessory, Aluminum -
Bronze, 1/2" Threaded
L-Mount



LAA-003-BK

Accessory, Aluminum -
Black, 1/2" Threaded
L-Mount



LAA-004

Accessory, Aluminum -
Bronze, 1/2" Threaded
T-Mount



LAA-004-BK

Accessory, Aluminum -
Black, 1/2" Threaded
T-Mount

Accessories - Pro Series



LP-REMOTE

LumienPRO Remote
(Functionality determined
by the Light Fixture)