


M4B1-5.5W-27K-60-A

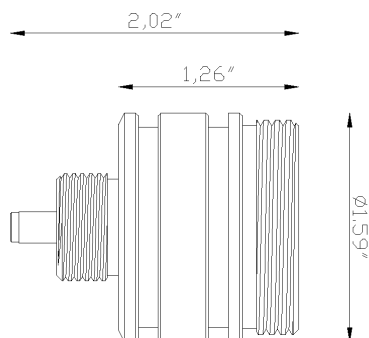

PROJECT: _____

TYPE: _____

CAT #: _____

DESCRIPTION

**Micro, Integrated Modular, Brass -
Antique, 5.5W, 420 Lm, 2700K, 60°, 10-15V**

SPECIFICATIONS

Construction	Brass
Finish	Antique
Lead Wire	6'
Voltage	10-15V
Light Warranty	10 Years

FINISHES



Antique

NOTES

Lumien Lighting

770-485-9002
orders@lumienlighting.com
www.lumienlighting.com

Lumien Lighting reserves the right
to modify product specifications
without notification. © 2023
Lumien Enterprise Inc.



ORDERING GUIDE

MODULE TYPE (required)	WATTS	COLOR TEMP	BEAM SPREAD	FINISH	ACCESSORIES
---------------------------	-------	---------------	----------------	--------	-------------

M4B1-5.5W-27K-60-A

CORE: M4B1

3.5W

5.5W

2700K

3000K

40°

60°

A

M4B1-5.5W-27K-60-A

PRO: M7B1

4.5W

2700-5700K

40°

60°

A

BK

M4B1-5.5W-27K-60-A

PRO: M8B1

3W

2700-5700K

40°

A

BK

	CORE	CORE	PRO	PRO
	M4B1-3.5W-27K-40-A M4B1-3.5W-27K-60-A M4B1-3.5W-30K-40-A M4B1-3.5W-30K-60-A	M4B1-5.5W-27K-40-A M4B1-5.5W-27K-60-A M4B1-5.5W-30K-40-A M4B1-5.5W-30K-60-A	M7B1-4.5W-40-A M7B1-4.5W-40-BK M7B1-4.5W-60-A	M8B1-3W-27K-40-A M8B1-3W-27K-40-BK M8B1-3W-30K-40-A M8B1-3W-30K-40-BK
Construction	Brass	Brass	Brass	Brass
Finish	Antique	Antique	Antique, Black	Antique, Black
Input Voltage	10-15V	10-15V	10-15V	10-15V
Wattage (Volt Amps)	3.5W (5.59)	5.5W (8.66)	4.5W (6.12)	3W (4.83)
Module Lumens	316 Lm, 318 Lm, 327 Lm,	428 Lm, 420 Lm, 472 Lm,	317-352 Lm, 283-316 Lm	27K: 129 Lm, R: 57 Lm, G:
Color Temperature	2700K, 3000K	2700K, 3000K	2700-5700K	2700-5700K
Beam Spread	60°, 40°	40°, 60°	40°, 60°	40°
Lead Wire Length	6'	6'	6'	6'
CRI	80+	80+	80+	80+
RGB	No	No	No	Yes
Dimmable	Primary Dimming	Primary Dimming	Primary Dimming	Primary Dimming
Rated Life	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Warranty	10 Years	10 Years	10 Years	10 Years
Core Drill Size	-	-	-	-