

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		1625.1 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	79.5V x 79.5H
	At 50% of Imax	37.5V x 37.6H
	At 90% of Imax	15.6V x 15.2H
Beam Flux	Total	1000.2 lumens per klm.
	To 10% of Imax	812.2 lumens per klm.
	To 50% of Imax	388.3 lumens per klm.
	To 90% of Imax	89.5 lumens per klm.
	Upward LOR	1.1 %
	Downward LOR	98.9 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-05-16

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.16V I:0.3592A P:3.115W PF:0.7133 Freq:59.98Hz Lamp Flux:290.272x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Micro 4.5W 4110K	WEIGHT:
SPEC.:40°lens	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

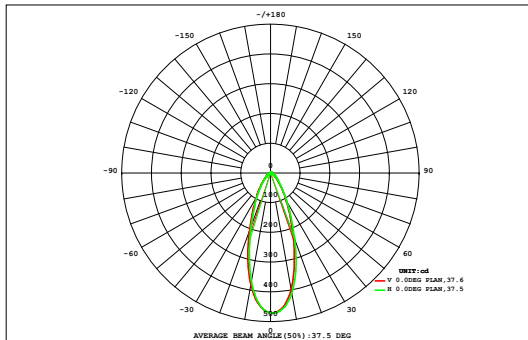

DATA OF LAMP		Eff:93.19lm/W	
MODEL	M7B1-4.5W-40-A	Imax (cd)	471.7
NOMINAL POWER (W)	4.5	AVAILABILITY (%)	81.2
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	235.6
NOMINAL FLUX (lm)	290.272	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	290.3
TEST VOLTAGE (V)	12	θ @50% (H,V)	38,37DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.01	0.02	0.03	0.05	0.07	0.09	0.11	0.12	0.13	0.13	0.12	0.11	0.09	0.07	0.05	0.03	0.02	0.01	1.25	0.00
72	0.01	0.02	0.03	0.05	0.07	0.09	0.11	0.12	0.13	0.13	0.12	0.11	0.09	0.07	0.05	0.03	0.02	0.01	1.25	0.00
64	0.01	0.03	0.05	0.08	0.12	0.15	0.19	0.22	0.24	0.24	0.22	0.19	0.15	0.12	0.08	0.06	0.03	0.01	2.19	0.00
56	0.02	0.04	0.08	0.12	0.18	0.25	0.33	0.39	0.43	0.43	0.39	0.33	0.25	0.18	0.12	0.08	0.04	0.02	3.70	0.00
48	0.03	0.06	0.10	0.18	0.28	0.40	0.54	0.67	0.75	0.75	0.67	0.54	0.40	0.28	0.18	0.11	0.06	0.03	6.00	0.18
40	0.03	0.07	0.14	0.24	0.40	0.61	0.87	1.14	1.32	1.32	1.14	0.88	0.62	0.40	0.24	0.14	0.07	0.03	9.66	5.77
32	0.04	0.08	0.17	0.31	0.55	0.92	1.44	2.02	2.45	2.47	2.05	1.46	0.93	0.55	0.32	0.17	0.08	0.04	16.0	13.4
24	0.04	0.09	0.20	0.38	0.72	1.33	2.25	3.44	4.45	4.48	3.51	2.32	1.36	0.74	0.39	0.20	0.10	0.04	26.0	23.9
	0.04	0.10	0.22	0.44	0.90	1.73	3.18	5.27	6.98	7.04	5.40	3.31	1.81	0.92	0.45	0.22	0.10	0.04	38.2	36.2
	0.04	0.11	0.23	0.48	1.00	1.97	3.81	6.49	8.54	8.65	6.73	4.01	2.09	1.03	0.48	0.23	0.11	0.05	46.0	44.2
	0.04	0.11	0.23	0.47	0.99	1.94	3.72	6.30	8.31	8.43	6.54	3.91	2.06	1.02	0.48	0.23	0.11	0.05	44.9	43.1
	0.04	0.10	0.21	0.43	0.87	1.65	2.96	4.79	6.24	6.30	4.92	3.09	1.73	0.89	0.44	0.22	0.10	0.04	35.0	33.1
-24	0.04	0.09	0.19	0.36	0.68	1.24	2.04	3.00	3.70	3.73	3.07	2.11	1.27	0.70	0.37	0.19	0.09	0.04	22.9	20.7
-32	0.04	0.08	0.16	0.29	0.50	0.84	1.29	1.75	2.04	2.06	1.78	1.32	0.85	0.51	0.29	0.16	0.08	0.04	14.1	11.3
-40	0.03	0.07	0.13	0.22	0.36	0.54	0.77	0.98	1.11	1.12	0.99	0.77	0.54	0.36	0.22	0.13	0.07	0.03	8.44	3.66
-48	0.03	0.05	0.10	0.16	0.25	0.35	0.45	0.55	0.60	0.60	0.55	0.46	0.35	0.25	0.16	0.10	0.05	0.03	5.08	0.00
-56	0.02	0.04	0.07	0.11	0.16	0.22	0.27	0.32	0.34	0.34	0.32	0.28	0.22	0.17	0.11	0.07	0.04	0.02	3.14	0.00
-64	0.01	0.03	0.05	0.08	0.10	0.14	0.16	0.19	0.20	0.20	0.19	0.16	0.14	0.11	0.08	0.05	0.03	0.01	1.91	0.00
-72	0.00	0.02	0.03	0.05	0.06	0.08	0.09	0.10	0.11	0.11	0.10	0.09	0.08	0.06	0.05	0.03	0.02	0.00	1.08	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)	16	24	32	40	48	56	64	72			
Φ t	0.52	1.20	2.38	4.45	8.18	14.4	24.5	37.7	47.9	48.4	38.7	25.3	14.9	8.33	4.52	2.41	1.21	0.53	286	---
Φ a	0.00	0.00	0.00	0.00	3.94	11.1	21.4	34.8	45.0	45.5	35.7	22.3	11.6	4.17	0.00	0.00	0.00	0.00	---	236

one-half-peak spread: U:19.4,D:18.3 , L:19.6,R:18.3


NEMA Beam Type: Type 5

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-05-16

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.16V I:0.3592A P:3.115W PF:0.7133 Freq:59.98Hz Lamp Flux:290.272x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Micro 4.5W 4110K	WEIGHT:
SPEC.:40°lens	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

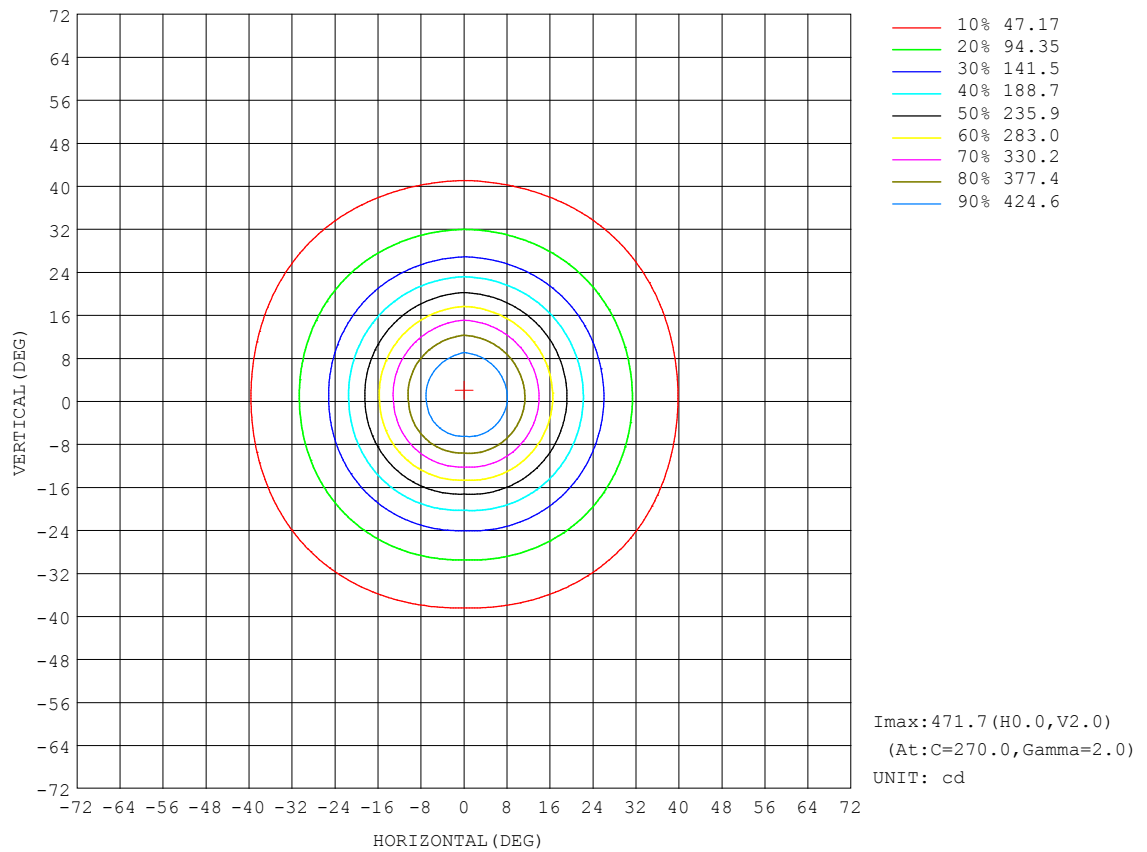


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-05-16

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.16V I:0.3592A P:3.115W PF:0.7133 Freq:59.98Hz Lamp Flux:290.272x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Micro 4.5W 4110K	WEIGHT:
SPEC.:40° lens	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

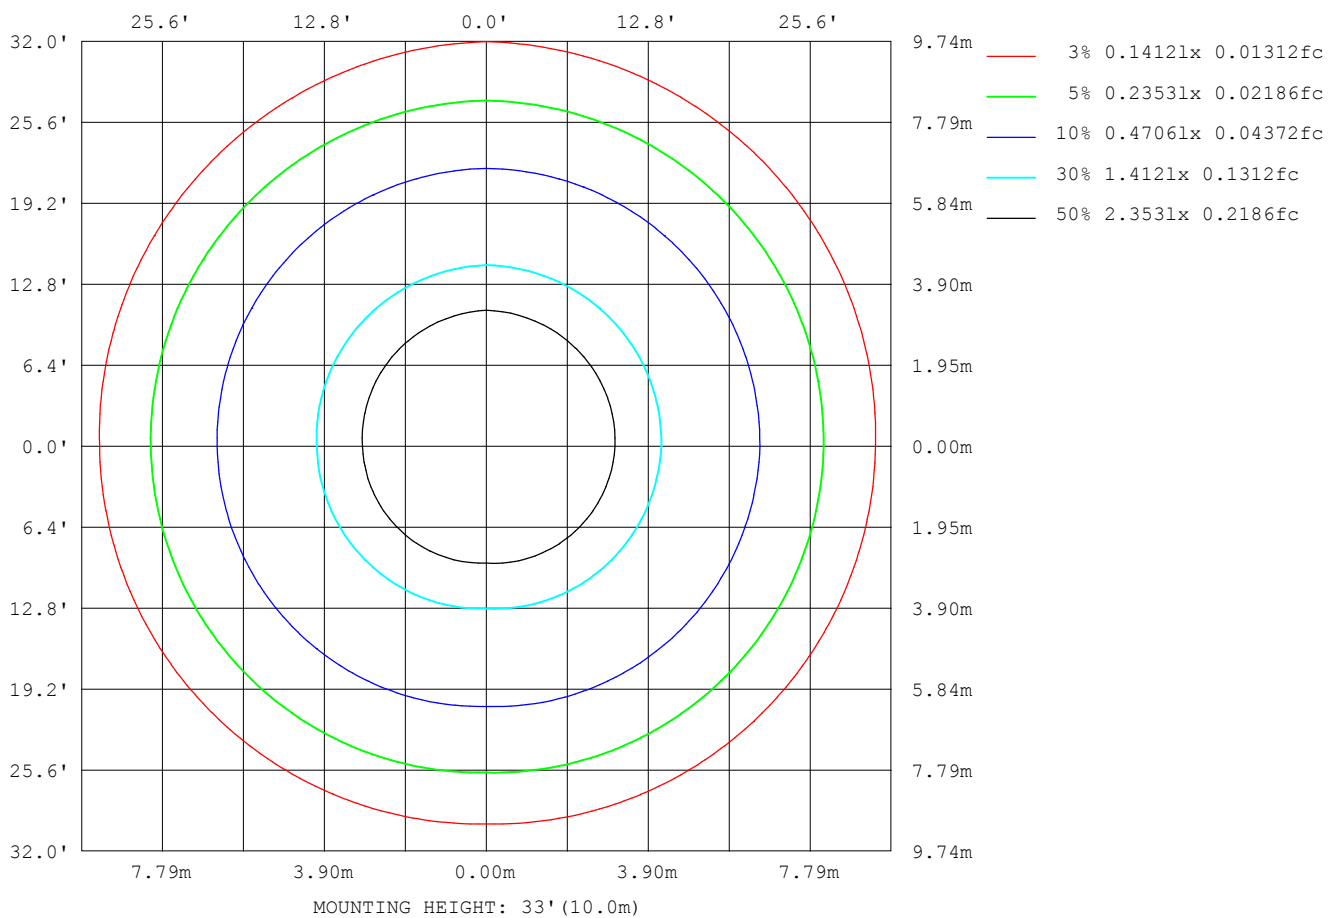

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-05-16

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

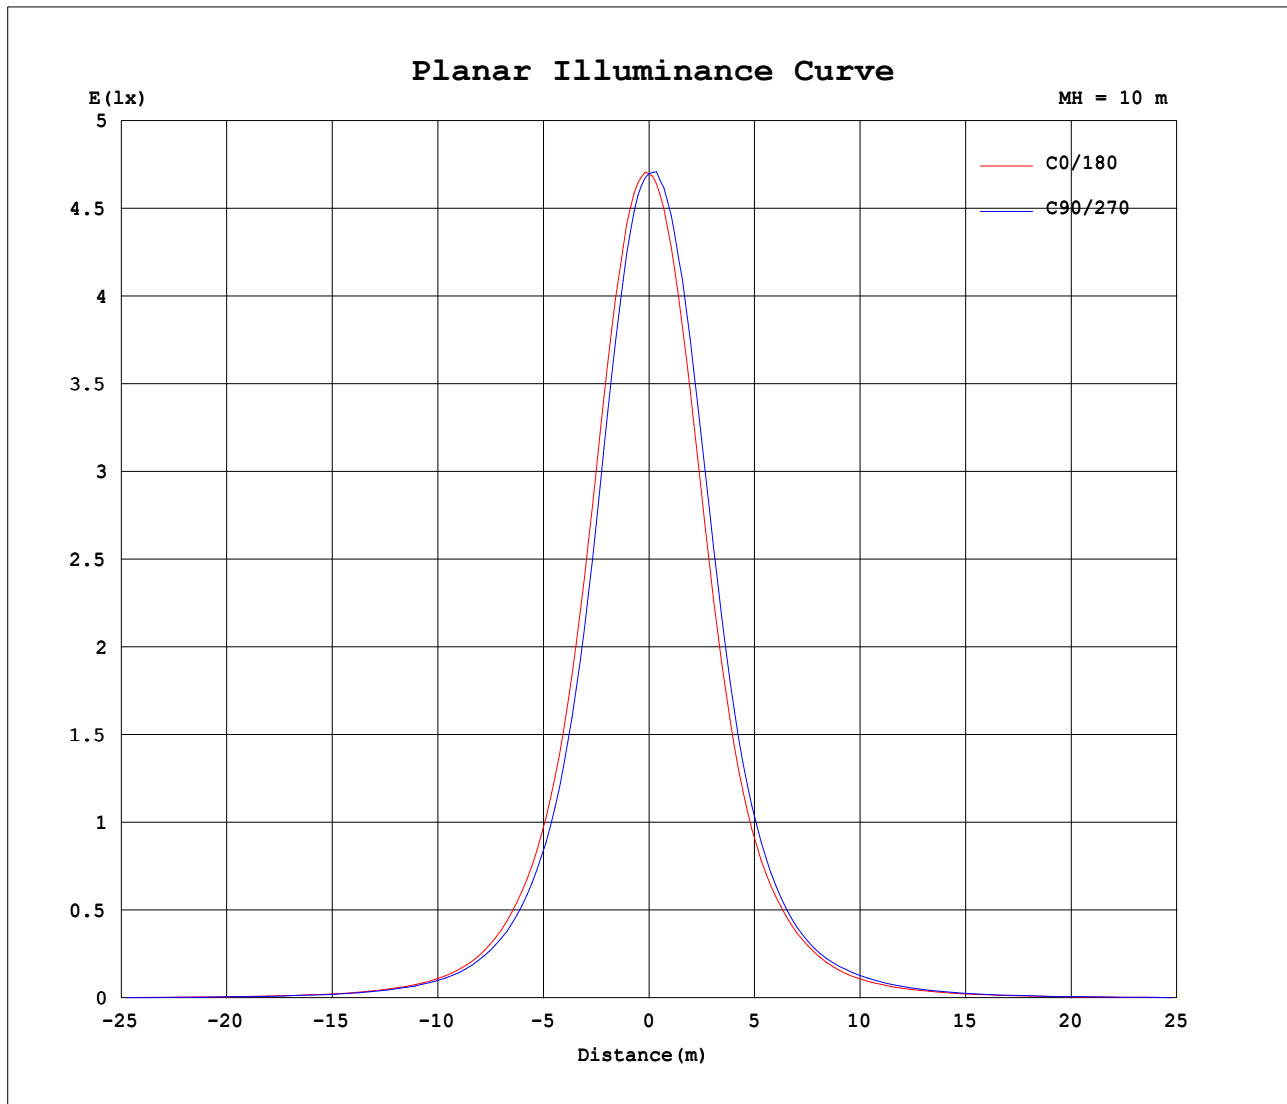


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-05-16

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.16V I:0.3592A P:3.115W PF:0.7133 Freq:59.98Hz Lamp Flux:290.272x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Micro 4.5W 4110K	WEIGHT:
SPEC.:40°lens	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

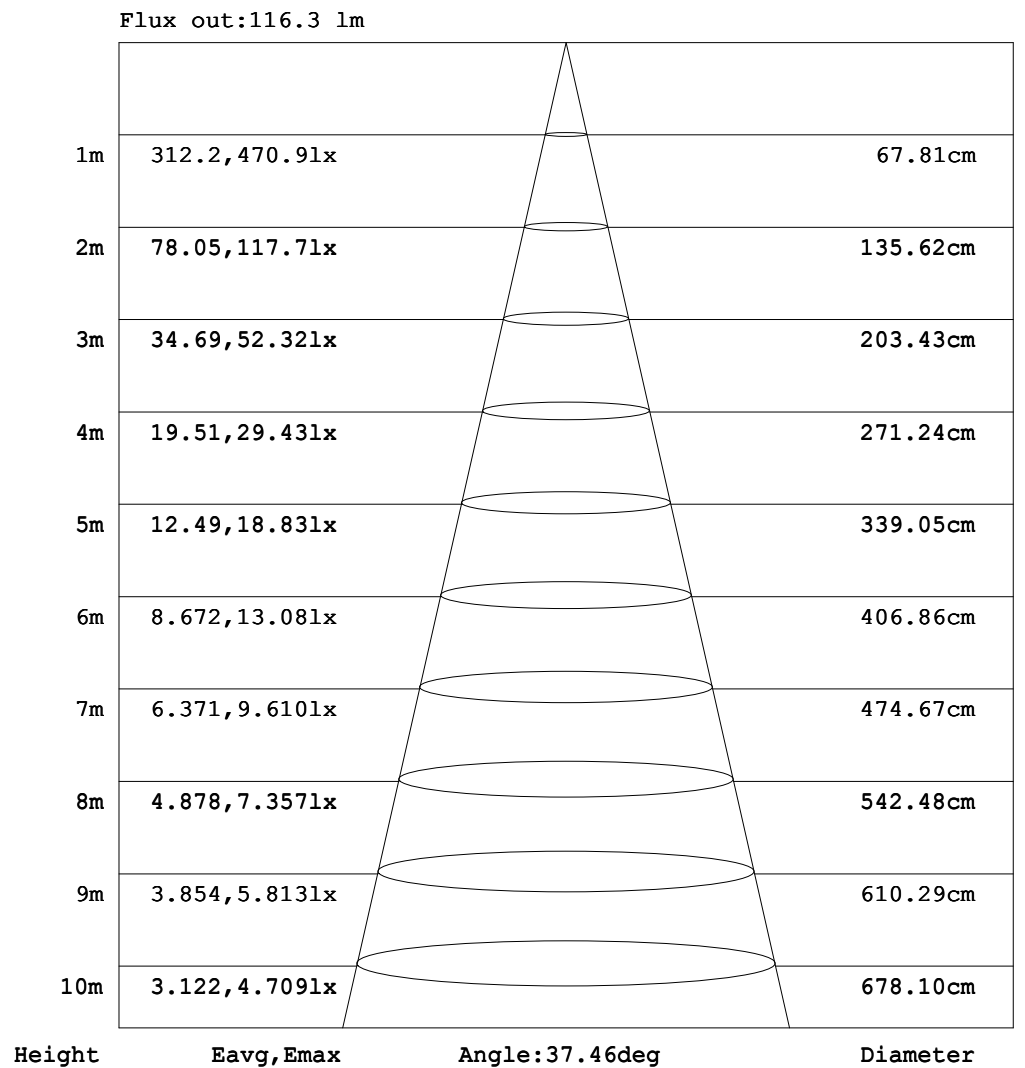

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-05-16

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.16V I:0.3592A P:3.115W PF:0.7133 Freq:59.98Hz Lamp Flux:290.272x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Micro 4.5W 4110K	WEIGHT:
SPEC.:40°lens	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.19	0.35	0.65	0.97	1.36	1.79	2.20	2.54	2.81	2.99	3.09
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.05	0.18	0.36	0.64	0.96	1.35	1.76	2.16	2.51	2.77	2.93	3.04
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.15	0.31	0.51	0.81	1.12	1.48	1.83	2.15	2.40	2.59	2.71
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.07	0.19	0.35	0.53	0.77	1.02	1.28	1.52	1.74	1.89	1.99
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.07	0.17	0.28	0.42	0.55	0.70	0.85	0.98	1.08	1.14
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.05	0.09	0.14	0.21	0.29	0.35	0.41	0.46	0.49
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.03	0.05	0.07	0.09	0.11	0.11
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.09	0.16	0.31	0.46	0.62	0.75	0.86	0.95	1.00	1.03	1.02
-70	0.00	0.00	0.00	0.00	0.17	0.66	1.26	1.75	2.24	2.67	3.05	3.41	3.72	3.99	4.23	4.41	4.53	4.59	4.59
-60	0.00	0.00	0.00	0.37	1.32	2.14	2.92	3.66	4.40	5.16	5.96	6.76	7.55	8.27	8.90	9.42	9.80	10.0	10.1
-50	0.00	0.00	0.13	1.25	2.36	3.40	4.47	5.66	7.01	8.51	10.1	11.8	13.5	15.3	16.9	18.3	19.4	20.0	20.1
-40	0.00	0.00	0.46	1.92	3.22	4.56	6.12	8.03	10.2	12.8	15.9	19.4	23.3	27.4	31.6	35.6	38.9	41.2	41.7
-30	0.00	0.00	0.91	2.50	3.97	5.67	7.85	10.5	13.9	18.2	23.6	30.4	39.1	50.1	61.7	72.9	82.6	89.2	91.0
-20	0.00	0.00	1.24	2.90	4.56	6.63	9.34	12.8	17.6	24.0	32.7	45.8	63.3	84.7	110	139	167	187	193
-10	0.00	0.00	1.40	3.13	4.95	7.31	10.4	14.6	20.5	28.8	41.6	61.0	87.2	123	173	237	303	354	371
0	0.00	0.00	1.46	3.22	5.10	7.58	10.8	15.3	21.7	31.0	45.6	68.0	98.7	143	210	296	382	445	470
10	0.00	0.00	1.42	3.16	4.99	7.38	10.6	14.9	21.0	29.7	42.7	62.7	90.4	129	184	256	330	386	411
20	0.00	0.00	1.26	2.95	4.64	6.75	9.54	13.3	18.4	25.4	34.7	48.4	67.2	91.5	121	157	194	224	239
30	0.00	0.00	0.95	2.58	4.07	5.84	8.08	11.0	14.7	19.6	25.8	33.6	43.2	55.0	68.7	82.9	96.0	106	110
40	0.00	0.00	0.50	2.02	3.35	4.74	6.38	8.37	10.9	13.9	17.6	21.9	26.7	31.8	37.1	42.1	46.3	49.4	50.7
50	0.00	0.00	0.16	1.35	2.52	3.59	4.73	6.00	7.44	9.08	11.1	13.2	15.5	17.9	20.2	22.3	24.0	25.2	25.8
60	0.00	0.00	0.00	0.45	1.47	2.37	3.18	3.97	4.79	5.66	6.54	7.43	8.34	9.19	10.1	11.0	11.7	12.1	12.3
70	0.00	0.00	0.00	0.01	0.26	0.81	1.51	2.08	2.63	3.10	3.52	3.94	4.32	4.67	4.97	5.23	5.43	5.56	5.63
80	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.09	0.23	0.40	0.60	0.81	1.03	1.23	1.42	1.58	1.70	1.79	1.83
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.03	0.05	0.08	0.10	0.10
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.09	0.18	0.23	0.31	0.40	0.45	0.47	0.46
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.08	0.20	0.32	0.49	0.67	0.82	0.96	1.09	1.15	1.17
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.08	0.21	0.37	0.62	0.86	1.15	1.44	1.68	1.87	1.99	2.00
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.15	0.31	0.56	0.84	1.20	1.58	1.95	2.27	2.51	2.66	2.72
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.19	0.35	0.65	0.97	1.36	1.79	2.20	2.54	2.81	2.99	3.06

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-05-16

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.16V I:0.3592A P:3.115W PF:0.7133 Freq:59.98Hz Lamp Flux:290.272x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Micro 4.5W 4110K	WEIGHT:
SPEC.:40°lens	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	3.04	2.95	2.79	2.56	2.20	1.80	1.36	0.95	0.62	0.37	0.15	0.02	0.00	0.00	0.00	0.00	0.00	0.00	
-170	2.99	2.91	2.72	2.44	2.10	1.70	1.28	0.92	0.64	0.34	0.14	0.02	0.00	0.00	0.00	0.00	0.00	0.00	
-160	2.65	2.52	2.32	2.05	1.74	1.38	1.03	0.74	0.47	0.30	0.14	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
-150	1.94	1.83	1.65	1.44	1.19	0.94	0.70	0.49	0.31	0.15	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
-140	1.10	1.03	0.92	0.80	0.68	0.52	0.36	0.24	0.15	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-130	0.47	0.44	0.38	0.34	0.25	0.18	0.14	0.05	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.11	0.09	0.07	0.05	0.03	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	1.02	0.99	0.93	0.82	0.68	0.56	0.42	0.29	0.15	0.09	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	4.60	4.54	4.43	4.26	4.03	3.78	3.48	3.13	2.73	2.27	1.77	1.20	0.56	0.17	0.00	0.00	0.00	0.00	
-60	10.0	9.82	9.45	8.93	8.32	7.61	6.84	6.03	5.23	4.49	3.78	3.01	2.16	1.25	0.34	0.00	0.00	0.00	
-50	20.0	19.4	18.3	16.9	15.3	13.5	11.9	10.2	8.61	7.12	5.75	4.57	3.53	2.41	1.13	0.14	0.00	0.00	
-40	41.2	39.1	35.8	31.9	27.6	23.5	19.5	15.9	12.9	10.3	8.14	6.24	4.67	3.37	1.95	0.41	0.00	0.00	
-30	89.8	83.7	74.0	62.6	50.6	39.6	30.8	23.9	18.3	13.9	10.6	7.98	5.79	4.12	2.56	0.73	0.00	0.00	
-20	189	170	143	114	87.5	64.7	46.4	33.3	24.4	17.7	12.9	9.48	6.78	4.69	3.01	1.07	0.00	0.00	
-10	359	311	245	181	129	91.2	62.6	42.2	29.3	20.8	14.7	10.6	7.47	5.07	3.28	1.31	0.00	0.00	
0	456	399	311	222	153	105	70.5	46.4	31.6	22.0	15.4	11.0	7.74	5.21	3.39	1.40	0.00	0.00	
10	390	337	264	192	135	94.3	64.3	43.4	30.1	21.3	14.9	10.7	7.53	5.11	3.31	1.33	0.00	0.00	
20	226	198	161	125	94.3	68.7	49.0	35.3	25.7	18.5	13.4	9.68	6.89	4.76	3.06	1.09	0.00	0.00	
30	106	97.0	84.0	69.6	55.6	43.6	33.9	26.1	19.7	14.8	11.1	8.20	5.95	4.23	2.63	0.77	0.00	0.00	
40	49.5	46.5	42.3	37.4	32.1	26.9	22.0	17.6	14.0	11.0	8.48	6.49	4.86	3.50	2.05	0.45	0.00	0.00	
50	25.2	24.0	22.3	20.2	17.9	15.5	13.3	11.2	9.17	7.55	6.10	4.83	3.72	2.56	1.23	0.16	0.00	0.00	
60	12.1	11.7	11.0	10.1	9.24	8.39	7.51	6.61	5.73	4.88	4.09	3.28	2.39	1.40	0.41	0.00	0.00	0.00	
70	5.57	5.45	5.25	5.01	4.71	4.38	4.01	3.60	3.15	2.66	2.10	1.45	0.71	0.25	0.01	0.00	0.00	0.00	
80	1.79	1.69	1.56	1.38	1.16	0.97	0.77	0.58	0.39	0.23	0.10	0.02	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
130	0.11	0.10	0.08	0.08	0.06	0.05	0.06	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
140	0.49	0.51	0.47	0.41	0.36	0.28	0.18	0.11	0.08	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
150	1.20	1.18	1.09	0.97	0.84	0.66	0.49	0.34	0.20	0.09	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
160	2.05	1.98	1.85	1.66	1.41	1.12	0.84	0.60	0.38	0.23	0.11	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
170	2.71	2.65	2.48	2.23	1.91	1.55	1.17	0.84	0.58	0.30	0.13	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
180	3.04	2.95	2.79	2.56	2.20	1.80	1.36	0.95	0.62	0.37	0.15	0.02	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-05-16

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: