

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		3804.4 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	47.5V x 49.3H
	At 50% of Imax	26.8V x 26.5H
	At 90% of Imax	10.5V x 10.2H
Beam Flux	Total	1000.6 lumens per klm.
	To 10% of Imax	826.6 lumens per klm.
	To 50% of Imax	448.6 lumens per klm.
	To 90% of Imax	86.7 lumens per klm.
	Upward LOR	1.3 %
	Downward LOR	98.7 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.05V I:1.330A P:11.69W PF:0.7293 Freq:59.97Hz Lamp Flux:470.003x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spotlight RGBWWWEIGHT:	
SPEC.:12W 2700K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:UP-LIGHT SHROUD

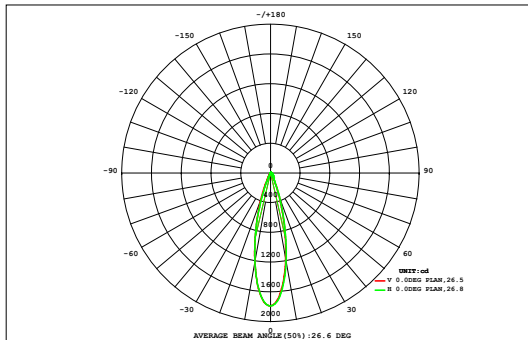

DATA OF LAMP		Eff:40.22lm/W	
MODEL	D9A1-12W-BZ	Imax (cd)	1788
NOMINAL POWER (W)	12	AVAILABILITY (%)	82.5
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	387.8
NOMINAL FLUX (lm)	470.003	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	470.0
TEST VOLTAGE (V)	12	θ @50% (H,V)	26,27DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.04	0.06	0.09	0.12	0.15	0.19	0.22	0.25	0.27	0.27	0.25	0.22	0.19	0.15	0.12	0.09	0.06	0.04	2.81	0.00
45	0.04	0.06	0.09	0.12	0.15	0.19	0.22	0.25	0.27	0.27	0.25	0.22	0.19	0.15	0.12	0.09	0.06	0.04	2.81	0.00
40	0.05	0.08	0.11	0.15	0.20	0.25	0.30	0.34	0.37	0.37	0.34	0.30	0.25	0.20	0.16	0.11	0.08	0.05	3.74	0.00
35	0.06	0.10	0.14	0.20	0.26	0.34	0.43	0.51	0.57	0.57	0.52	0.44	0.35	0.27	0.20	0.14	0.10	0.07	5.27	0.00
30	0.07	0.11	0.17	0.25	0.36	0.51	0.67	0.83	0.94	0.94	0.83	0.67	0.51	0.37	0.26	0.18	0.12	0.08	7.86	0.00
25	0.08	0.13	0.21	0.33	0.51	0.77	1.19	1.64	1.92	1.91	1.60	1.16	0.77	0.52	0.34	0.22	0.14	0.09	13.5	7.03
20	0.09	0.15	0.25	0.42	0.73	1.37	2.32	3.35	4.03	4.01	3.27	2.23	1.32	0.72	0.43	0.26	0.16	0.10	25.2	20.9
15	0.10	0.17	0.30	0.53	1.11	2.30	4.05	5.95	7.20	7.16	5.83	3.89	2.16	1.07	0.54	0.31	0.18	0.10	42.9	39.4
10	0.10	0.18	0.33	0.64	1.57	3.31	5.90	8.69	10.6	10.5	8.53	5.68	3.10	1.45	0.64	0.34	0.19	0.11	61.8	58.6
5	0.10	0.18	0.34	0.73	1.87	3.99	7.11	10.5	12.8	12.7	10.3	6.82	3.72	1.71	0.71	0.36	0.19	0.11	74.3	71.3
0	0.09	0.17	0.33	0.70	1.84	3.98	7.12	10.5	12.8	12.7	10.3	6.83	3.71	1.68	0.69	0.34	0.19	0.10	74.1	71.2
-5	0.08	0.15	0.28	0.58	1.48	3.24	5.92	8.72	10.6	10.5	8.56	5.70	3.04	1.37	0.57	0.30	0.16	0.09	61.4	58.4
-10	0.07	0.13	0.23	0.42	0.98	2.14	3.99	5.99	7.26	7.22	5.87	3.83	2.00	0.93	0.43	0.24	0.14	0.08	42.0	38.7
-15	0.06	0.10	0.17	0.29	0.55	1.16	2.07	3.15	3.91	3.88	3.07	1.98	1.10	0.55	0.31	0.18	0.11	0.06	22.7	18.8
-20	0.04	0.07	0.12	0.20	0.31	0.52	0.88	1.27	1.50	1.48	1.24	0.85	0.51	0.32	0.21	0.13	0.08	0.05	9.77	3.57
-25	0.03	0.05	0.08	0.13	0.18	0.25	0.34	0.43	0.48	0.48	0.43	0.34	0.26	0.19	0.13	0.09	0.05	0.03	3.98	0.00
-30	0.02	0.03	0.05	0.08	0.10	0.13	0.16	0.17	0.17	0.17	0.17	0.16	0.14	0.11	0.08	0.05	0.04	0.03	1.86	0.00
-35	0.01	0.02	0.03	0.04	0.05	0.07	0.08	0.08	0.07	0.07	0.08	0.08	0.07	0.06	0.04	0.03	0.02	0.02	0.95	0.00
-40	0.01	0.01	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.01	0.42	0.00
-45	0.01	0.01	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.01	0.42	0.00
	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)	10	15	20	25	30	35	40	45			
Φ t	1.12	1.92	3.26	5.82	12.3	24.6	42.8	62.5	75.5	75.0	61.2	41.2	23.2	11.7	5.89	3.41	2.03	1.19	455	---
Φ a	0.00	0.00	0.00	0.00	6.74	20.4	39.0	58.9	72.1	71.6	57.6	37.3	18.8	5.49	0.00	0.00	0.00	0.00	---	388

one-half-peak spread: U:13.5,D:13.4 , L:13.6,R:13.1


NEMA Beam Type: Type 4

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.05V I:1.330A P:11.69W PF:0.7293 Freq:59.97Hz Lamp Flux:470.003x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spotlight RGBWWEIGHT:	
SPEC.:12W 2700K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:UP-LIGHT SHROUD

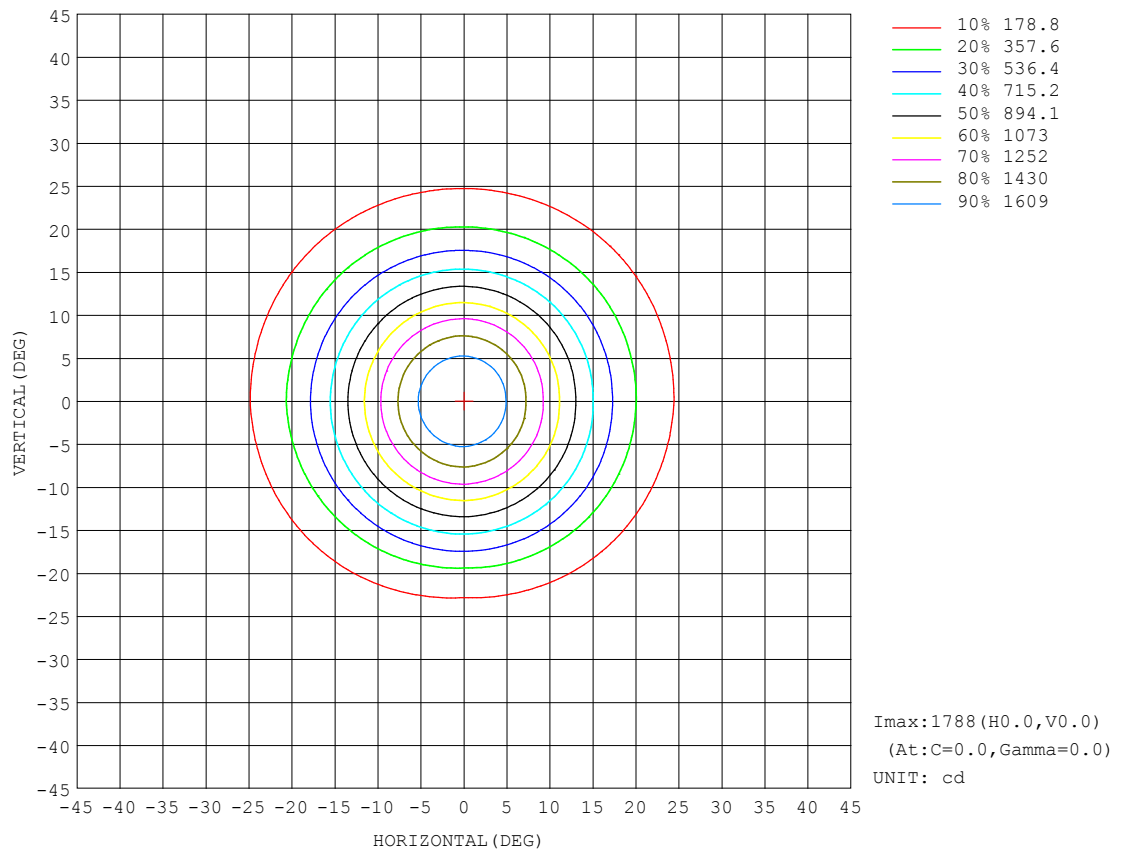


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.05V I:1.330A P:11.69W PF:0.7293 Freq:59.97Hz Lamp Flux:470.003x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spotlight RGBWWWEIGHT:	
SPEC.:12W 2700K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:UP-LIGHT SHROUD

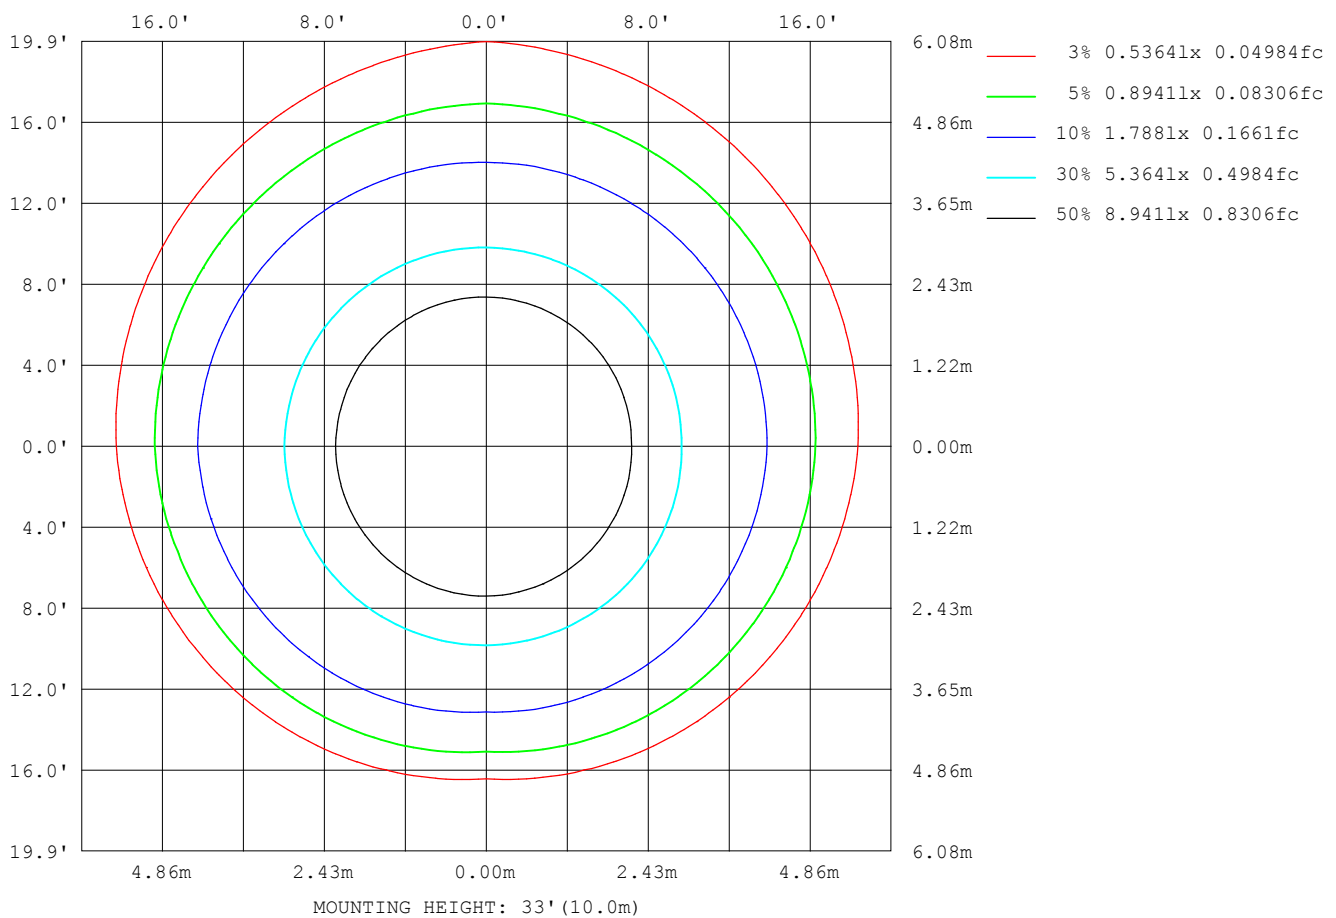

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

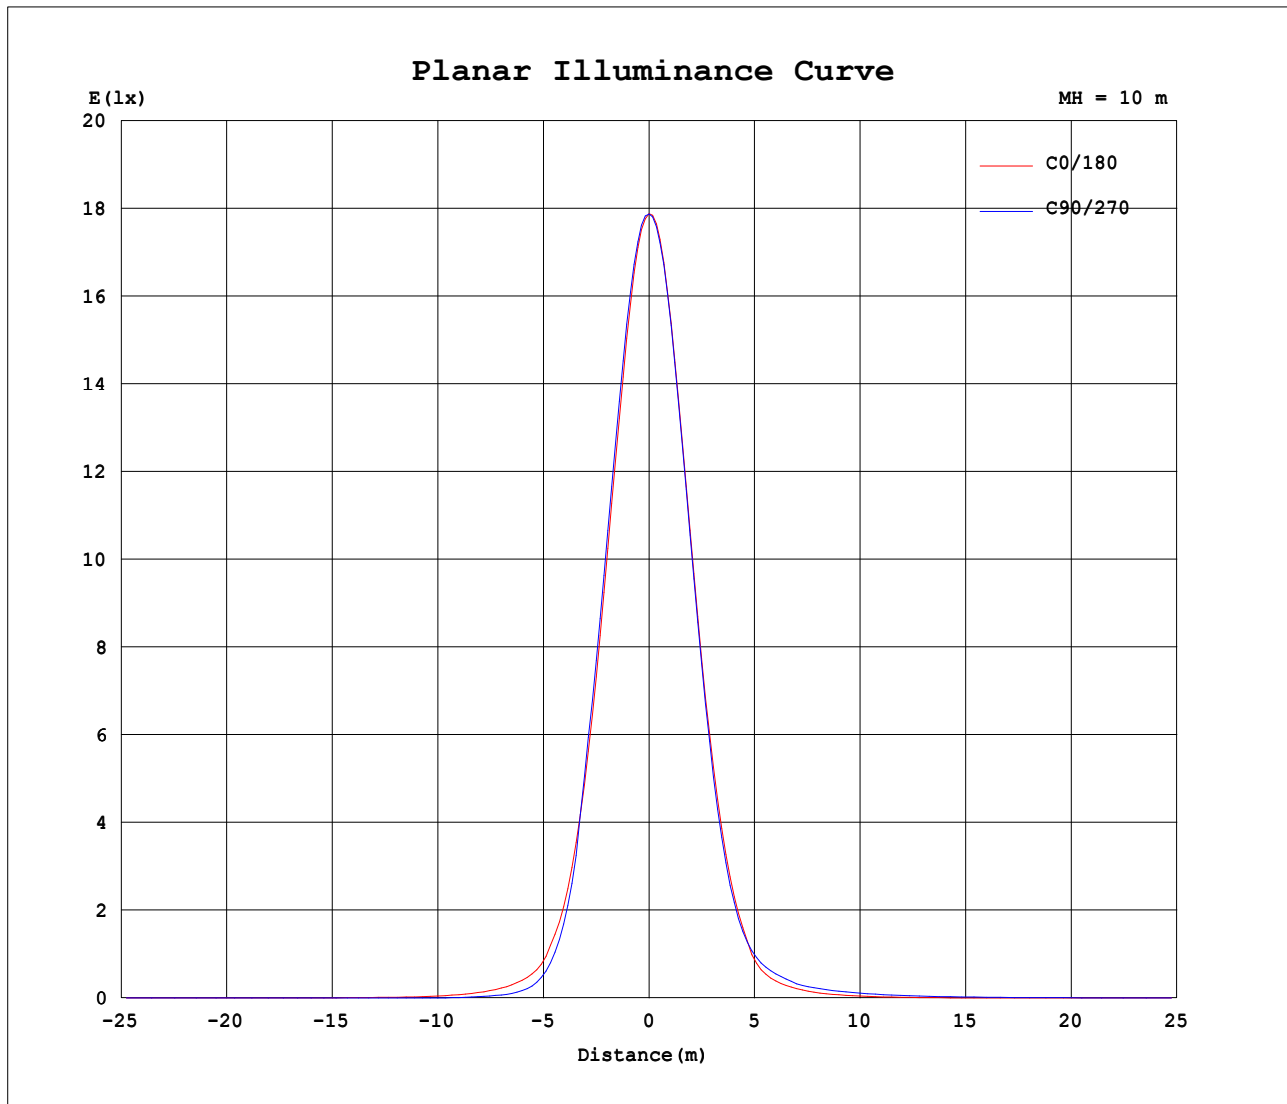


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.05V I:1.330A P:11.69W PF:0.7293 Freq:59.97Hz Lamp Flux:470.003x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spotlight RGBWWEIGHT:	
SPEC.:12W 2700K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:UP-LIGHT SHROUD

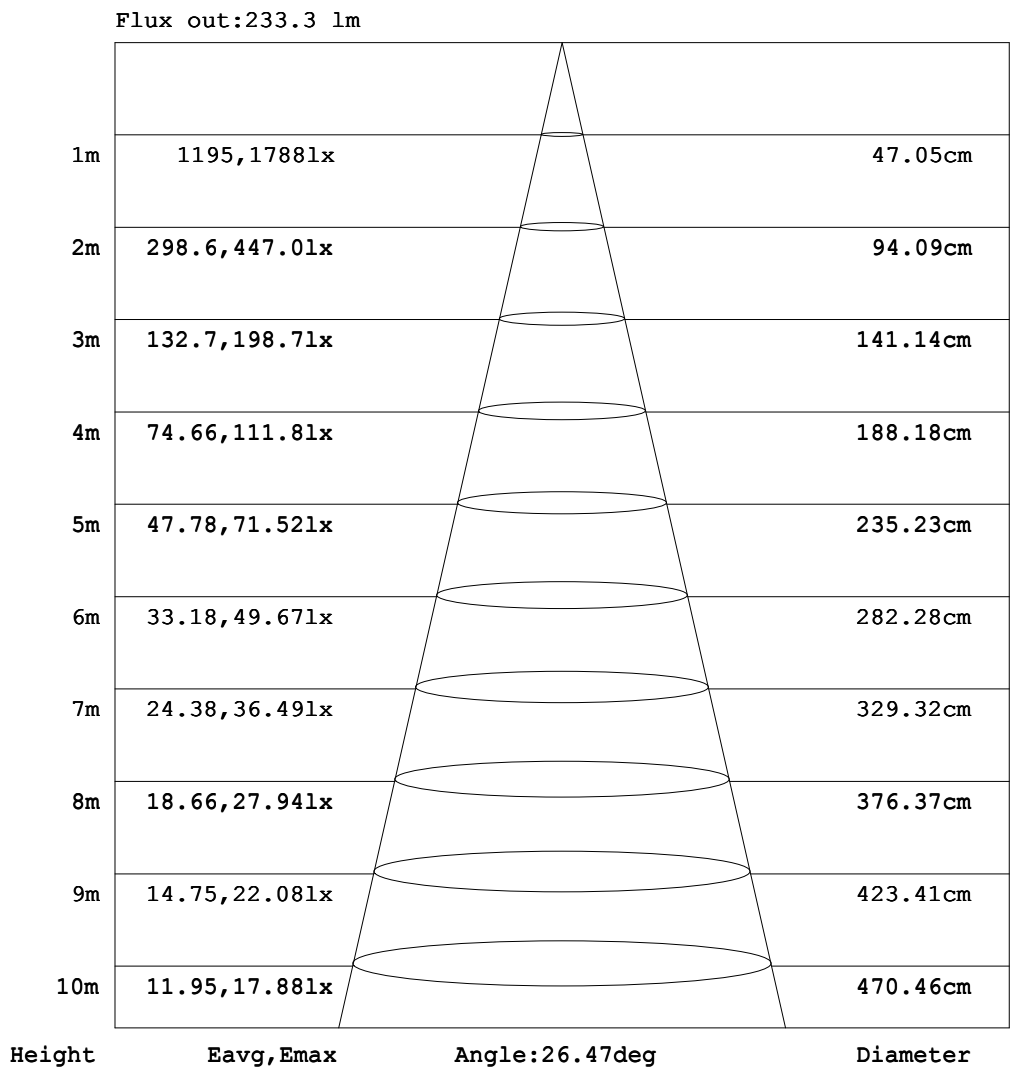

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.05V I:1.330A P:11.69W PF:0.7293 Freq:59.97Hz Lamp Flux:470.003x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spotlight	RGBWEIGHT:
SPEC.:12W 2700K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:UP-LIGHT SHROUD

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.19	0.59	1.29	2.34	3.61	4.87	5.83	6.37	6.62	6.75
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.04	0.23	0.64	1.34	2.35	3.58	4.82	5.84	6.49	6.81
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.06	0.16	0.48	1.00	1.77	2.73	3.78	4.77	5.56	6.13
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.05	0.11	0.24	0.54	0.97	1.53	2.20	2.86	3.48	3.97	4.28
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.07	0.12	0.21	0.36	0.59	0.87	1.16	1.46	1.70	1.86
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.08	0.12	0.18	0.25	0.32	0.40	0.47	0.52
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.04	0.07	0.08	0.09	0.10
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.08	0.09	0.12	0.12	0.13	0.15	0.14	0.11	0.06	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.10	0.18	0.25	0.47	0.82	1.16	1.37	1.41	1.28	0.97	0.52
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.14	0.24	0.62	1.44	2.41	3.37	4.01	4.66	5.62	6.48	6.89	6.60
-30	0.00	0.00	0.00	0.00	0.00	0.13	0.26	0.77	2.12	3.86	5.67	8.18	12.1	16.9	21.8	27.0	31.9	34.6	32.9
-20	0.00	0.00	0.00	0.00	0.04	0.21	0.51	1.84	4.12	6.86	11.1	18.1	28.2	44.0	74.1	142	225	295	315
-10	0.00	0.00	0.00	0.00	0.11	0.28	0.84	2.92	6.10	10.2	17.8	30.3	52.1	106	257	515	835	1110	1221
0	0.00	0.00	0.00	0.00	0.14	0.31	1.04	3.53	7.32	12.7	22.2	38.8	70.1	174	394	760	1222	1631	1788
10	0.00	0.01	0.02	0.04	0.26	0.63	1.53	4.15	8.15	13.5	22.5	36.9	63.3	120	275	519	831	1103	1214
20	0.00	0.01	0.03	0.07	0.29	0.83	1.68	3.92	7.55	12.3	19.1	29.0	43.5	68.0	105	178	268	343	372
30	0.00	0.01	0.04	0.09	0.27	0.84	1.61	3.13	5.97	9.80	14.4	20.5	28.3	37.5	48.8	64.6	78.9	90.0	95.8
40	0.00	0.02	0.05	0.10	0.22	0.65	1.40	2.35	4.00	6.57	9.81	13.6	17.7	22.3	27.4	32.3	36.8	40.3	42.7
50	0.00	0.02	0.06	0.11	0.18	0.37	0.87	1.67	2.63	3.80	5.54	7.70	10.1	12.7	15.3	17.7	20.0	21.8	23.2
60	0.00	0.02	0.06	0.10	0.16	0.25	0.40	0.72	1.30	2.09	2.92	3.86	4.84	5.92	7.16	8.37	9.50	10.5	11.2
70	0.00	0.02	0.05	0.09	0.14	0.20	0.26	0.34	0.45	0.59	0.82	1.13	1.51	1.95	2.44	2.92	3.36	3.72	4.00
80	0.00	0.02	0.05	0.07	0.10	0.14	0.19	0.24	0.28	0.33	0.39	0.44	0.51	0.57	0.63	0.69	0.74	0.79	0.84
90	0.00	0.02	0.04	0.07	0.09	0.11	0.13	0.15	0.17	0.20	0.22	0.24	0.26	0.28	0.31	0.33	0.35	0.37	0.39
100	0.00	0.02	0.04	0.06	0.07	0.08	0.09	0.10	0.10	0.11	0.12	0.12	0.13	0.13	0.13	0.14	0.14	0.15	0.15
110	0.00	0.02	0.03	0.04	0.05	0.05	0.05	0.04	0.03	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.02	0.03	0.03	0.03	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.01	0.02	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.01	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.05	0.08	0.17	0.26	0.31	0.31
150	0.00	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.12	0.33	0.66	1.05	1.47	1.84	2.07	2.13
160	0.00	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.19	0.55	1.12	1.89	2.75	3.55	4.18	4.57	4.70
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.13	0.45	1.05	1.96	3.10	4.26	5.24	5.85	6.08	6.09
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.19	0.59	1.29	2.34	3.61	4.87	5.83	6.37	6.62	6.73

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.05V I:1.330A P:11.69W PF:0.7293 Freq:59.97Hz Lamp Flux:470.003x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spotlight	RGBWWWEIGHT:
SPEC.:12W 2700K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:UP-LIGHT SHROUD

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	6.83	6.87	6.73	6.24	5.31	4.08	2.78	1.65	0.83	0.31	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-170	6.98	6.91	6.61	5.94	4.93	3.73	2.53	1.49	0.76	0.29	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
-160	6.36	6.03	5.48	4.70	3.74	2.73	1.77	1.00	0.48	0.18	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
-150	4.16	3.85	3.37	2.78	2.12	1.48	0.93	0.50	0.21	0.05	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-140	1.79	1.63	1.38	1.09	0.83	0.54	0.34	0.18	0.07	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-130	0.49	0.44	0.36	0.29	0.20	0.12	0.08	0.04	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.09	0.08	0.07	0.04	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.01	0.02	0.03	0.03	0.04	0.04	0.03	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.08	0.15	0.19	0.19	0.17	0.16	0.14	0.12	0.11	0.08	0.06	0.02	0.00	0.00	0.00	0.00	0.00	0.00	
-50	0.56	1.06	1.43	1.63	1.62	1.41	1.04	0.63	0.32	0.21	0.15	0.10	0.05	0.00	0.00	0.00	0.00	0.00	
-40	6.74	7.14	6.80	5.97	5.03	4.32	3.72	2.85	1.78	0.81	0.33	0.20	0.12	0.04	0.00	0.00	0.00	0.00	
-30	34.9	32.5	27.8	22.8	17.8	12.9	8.78	6.10	4.38	2.57	1.01	0.34	0.19	0.09	0.00	0.00	0.00	0.00	
-20	290	216	137	74.0	45.7	29.8	19.3	11.9	7.38	4.74	2.29	0.65	0.25	0.13	0.02	0.00	0.00	0.00	
-10	1097	813	489	237	103	54.4	32.1	19.1	11.0	6.70	3.52	1.11	0.32	0.16	0.04	0.00	0.00	0.00	
0	1602	1181	717	359	162	72.6	41.2	23.8	13.6	7.95	4.21	1.36	0.36	0.18	0.05	0.00	0.00	0.00	
10	1090	809	493	254	118	65.6	38.8	23.8	14.3	8.74	4.74	1.79	0.68	0.32	0.08	0.02	0.01	0.00	
20	337	259	173	105	69.7	45.1	30.2	19.9	12.8	8.18	4.37	1.82	0.87	0.38	0.09	0.03	0.01	0.00	
30	90.3	79.5	65.4	49.7	38.4	29.0	21.1	14.9	10.3	6.42	3.37	1.69	0.90	0.36	0.09	0.04	0.01	0.00	
40	40.5	37.0	32.6	27.7	22.7	18.0	13.9	10.2	6.91	4.20	2.43	1.45	0.72	0.27	0.10	0.05	0.02	0.00	
50	21.9	20.1	17.9	15.5	13.0	10.4	7.92	5.69	3.86	2.66	1.72	0.94	0.42	0.18	0.11	0.06	0.02	0.00	
60	10.5	9.53	8.42	7.20	5.96	4.88	3.87	2.96	2.12	1.35	0.78	0.42	0.25	0.16	0.10	0.06	0.02	0.00	
70	3.73	3.36	2.93	2.46	1.98	1.55	1.16	0.84	0.60	0.45	0.34	0.26	0.20	0.14	0.09	0.05	0.02	0.00	
80	0.79	0.74	0.69	0.63	0.57	0.51	0.44	0.39	0.33	0.28	0.24	0.19	0.14	0.10	0.07	0.05	0.02	0.00	
90	0.37	0.35	0.33	0.31	0.28	0.26	0.24	0.22	0.20	0.17	0.15	0.13	0.11	0.09	0.07	0.04	0.02	0.00	
100	0.15	0.14	0.14	0.13	0.13	0.13	0.12	0.12	0.11	0.10	0.10	0.09	0.08	0.07	0.06	0.04	0.02	0.00	
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.03	0.04	0.05	0.05	0.05	0.04	0.03	0.02	0.00	
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.03	0.03	0.03	0.02	0.00	
130	0.02	0.04	0.04	0.04	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.02	0.01	0.00	
140	0.40	0.43	0.39	0.31	0.29	0.20	0.13	0.06	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.01	0.00	
150	2.26	2.20	1.98	1.64	1.25	0.84	0.52	0.28	0.10	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.00	
160	4.80	4.65	4.27	3.67	2.89	2.08	1.32	0.72	0.34	0.12	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.00	
170	6.25	6.26	6.01	5.38	4.45	3.34	2.25	1.30	0.66	0.25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
180	6.83	6.87	6.73	6.24	5.31	4.08	2.78	1.65	0.83	0.31	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: