

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		2627.0 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	53.7V x 51.4H
	At 50% of Imax	32.7V x 35.4H
	At 90% of Imax	16.8V x 17.1H
Beam Flux	Total	1000.4 lumens per klm.
	To 10% of Imax	841.8 lumens per klm.
	To 50% of Imax	577.2 lumens per klm.
	To 90% of Imax	166.5 lumens per klm.
	Upward LOR	1.4 %
	Downward LOR	98.7 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.17V I:1.107A P:9.741W PF:0.7230 Freq:59.98Hz Lamp Flux:298.277x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight RGBWW	WEIGHT:
SPEC.:10W 2700K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWNLIGHT SHROUD

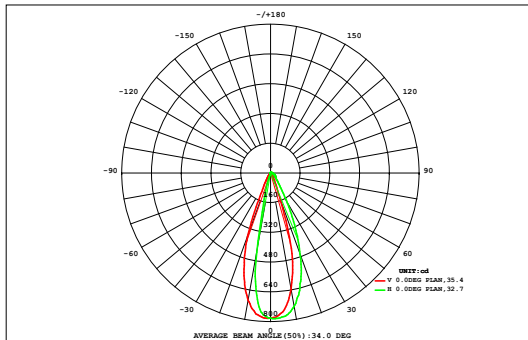

DATA OF LAMP		Eff:30.62lm/W	
MODEL	D9B2-10W-A	Imax (cd)	783.6
NOMINAL POWER (W)	10	AVAILABILITY (%)	82.7
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	246.5
NOMINAL FLUX (lm)	298.277	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	298.3
TEST VOLTAGE (V)	12	θ @50% (H,V)	35,33DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.06	0.09	0.11	0.15	0.19	0.23	0.28	0.33	0.37	0.37	0.33	0.28	0.23	0.18	0.14	0.11	0.08	0.06	3.59	0.00
45	0.06	0.09	0.11	0.15	0.19	0.23	0.28	0.33	0.37	0.37	0.33	0.28	0.23	0.18	0.14	0.11	0.08	0.06	3.59	0.00
40	0.07	0.09	0.13	0.18	0.24	0.32	0.40	0.49	0.56	0.55	0.48	0.39	0.30	0.23	0.17	0.12	0.09	0.06	4.85	0.48
35	0.07	0.11	0.15	0.23	0.33	0.46	0.63	0.80	0.94	0.93	0.78	0.60	0.43	0.30	0.20	0.14	0.09	0.06	7.24	4.29
30	0.08	0.12	0.18	0.29	0.46	0.72	1.05	1.41	1.70	1.68	1.37	1.00	0.66	0.41	0.25	0.16	0.10	0.07	11.7	9.49
25	0.08	0.13	0.22	0.38	0.67	1.11	1.72	2.36	2.81	2.74	2.20	1.58	1.01	0.59	0.32	0.18	0.10	0.06	18.3	16.5
20	0.08	0.14	0.26	0.49	0.92	1.67	2.72	3.57	4.06	3.94	3.21	2.24	1.40	0.79	0.40	0.20	0.11	0.06	26.3	24.7
15	0.08	0.15	0.29	0.59	1.19	2.45	3.71	4.59	5.07	4.99	4.31	3.09	1.73	0.93	0.46	0.21	0.10	0.05	34.0	32.6
10	0.08	0.15	0.31	0.63	1.49	3.09	4.37	5.25	5.69	5.63	5.00	3.84	2.09	0.95	0.45	0.20	0.09	0.04	39.3	38.1
5	0.07	0.14	0.29	0.60	1.66	3.35	4.66	5.54	5.90	5.85	5.30	4.11	2.25	0.83	0.38	0.16	0.07	0.03	41.2	39.9
0	0.06	0.12	0.25	0.52	1.48	3.05	4.23	5.27	5.76	5.71	5.02	3.68	1.94	0.65	0.29	0.13	0.05	0.02	38.2	36.9
-5	0.05	0.10	0.21	0.41	1.01	2.24	3.11	3.91	4.61	4.54	3.66	2.59	1.24	0.47	0.23	0.10	0.04	0.02	28.5	27.1
-10	0.04	0.08	0.16	0.29	0.57	1.29	1.94	2.14	1.96	1.87	1.86	1.31	0.58	0.30	0.16	0.07	0.03	0.02	14.7	13.0
-15	0.03	0.06	0.11	0.19	0.31	0.54	0.88	0.98	0.71	0.60	0.61	0.40	0.27	0.18	0.10	0.05	0.02	0.01	6.06	3.55
-20	0.03	0.04	0.07	0.12	0.18	0.23	0.29	0.29	0.13	0.06	0.13	0.15	0.13	0.09	0.06	0.03	0.02	0.01	2.06	0.00
-25	0.02	0.03	0.05	0.07	0.10	0.12	0.12	0.09	0.04	0.02	0.05	0.07	0.06	0.04	0.03	0.02	0.01	0.01	0.94	0.00
-30	0.01	0.02	0.03	0.04	0.05	0.06	0.06	0.04	0.02	0.01	0.02	0.03	0.03	0.02	0.01	0.01	0.01	0.01	0.47	0.00
-35	0.01	0.01	0.02	0.02	0.03	0.03	0.03	0.02	0.01	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.25	0.00
-40	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.14	0.00
-45	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.14	0.00
	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)	10	15	20	25	30	35	40	45			
Φ t	0.93	1.59	2.85	5.21	10.9	21.0	30.2	37.1	40.3	39.5	34.3	25.4	14.4	6.95	3.67	1.90	1.02	0.61	278	---
Φ a	0.00	0.00	0.00	1.87	8.69	19.2	28.8	35.8	39.3	38.5	33.1	23.9	12.5	4.46	0.35	0.00	0.00	0.00	---	247

one-half-peak spread: U:12.4,D:20.4 , L:18.5,R:17.1


NEMA Beam Type: Type 4

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.17V I:1.107A P:9.741W PF:0.7230 Freq:59.98Hz Lamp Flux:298.277x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight RGBWW	WEIGHT:
SPEC.:10W 2700K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWNLIGHT SHROUD

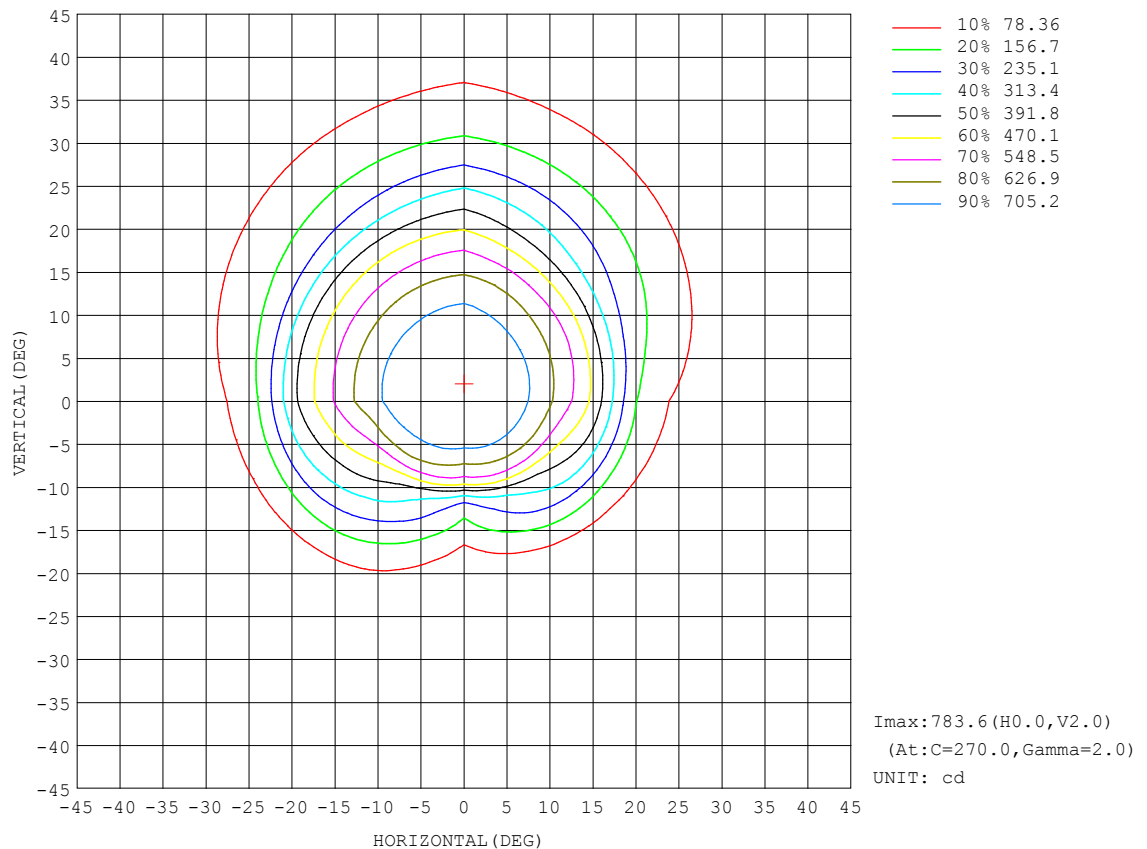


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.17V I:1.107A P:9.741W PF:0.7230 Freq:59.98Hz Lamp Flux:298.277x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight RGBWW	WEIGHT:
SPEC.:10W 2700K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWNLIGHT SHROUD

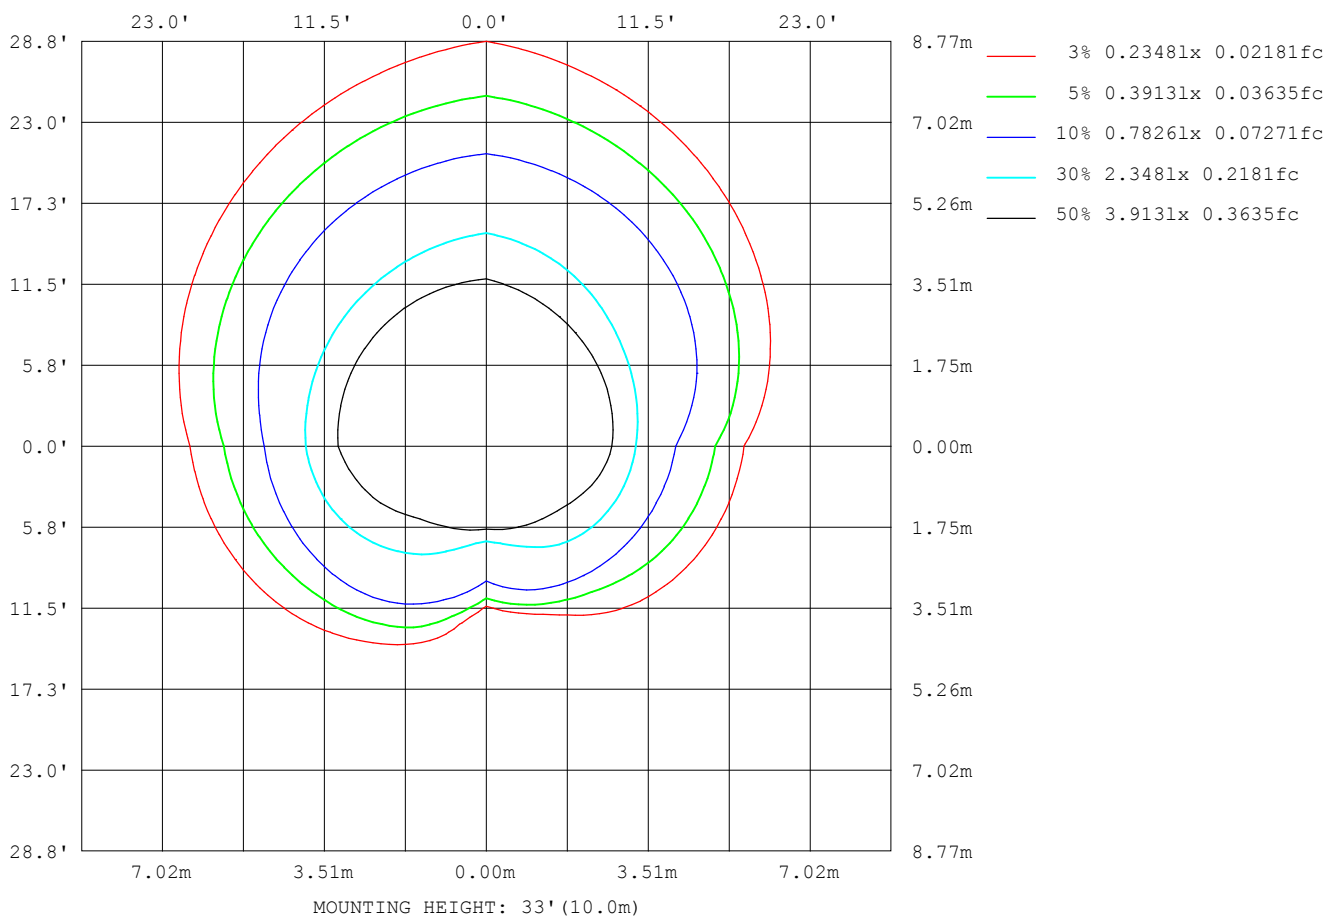

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

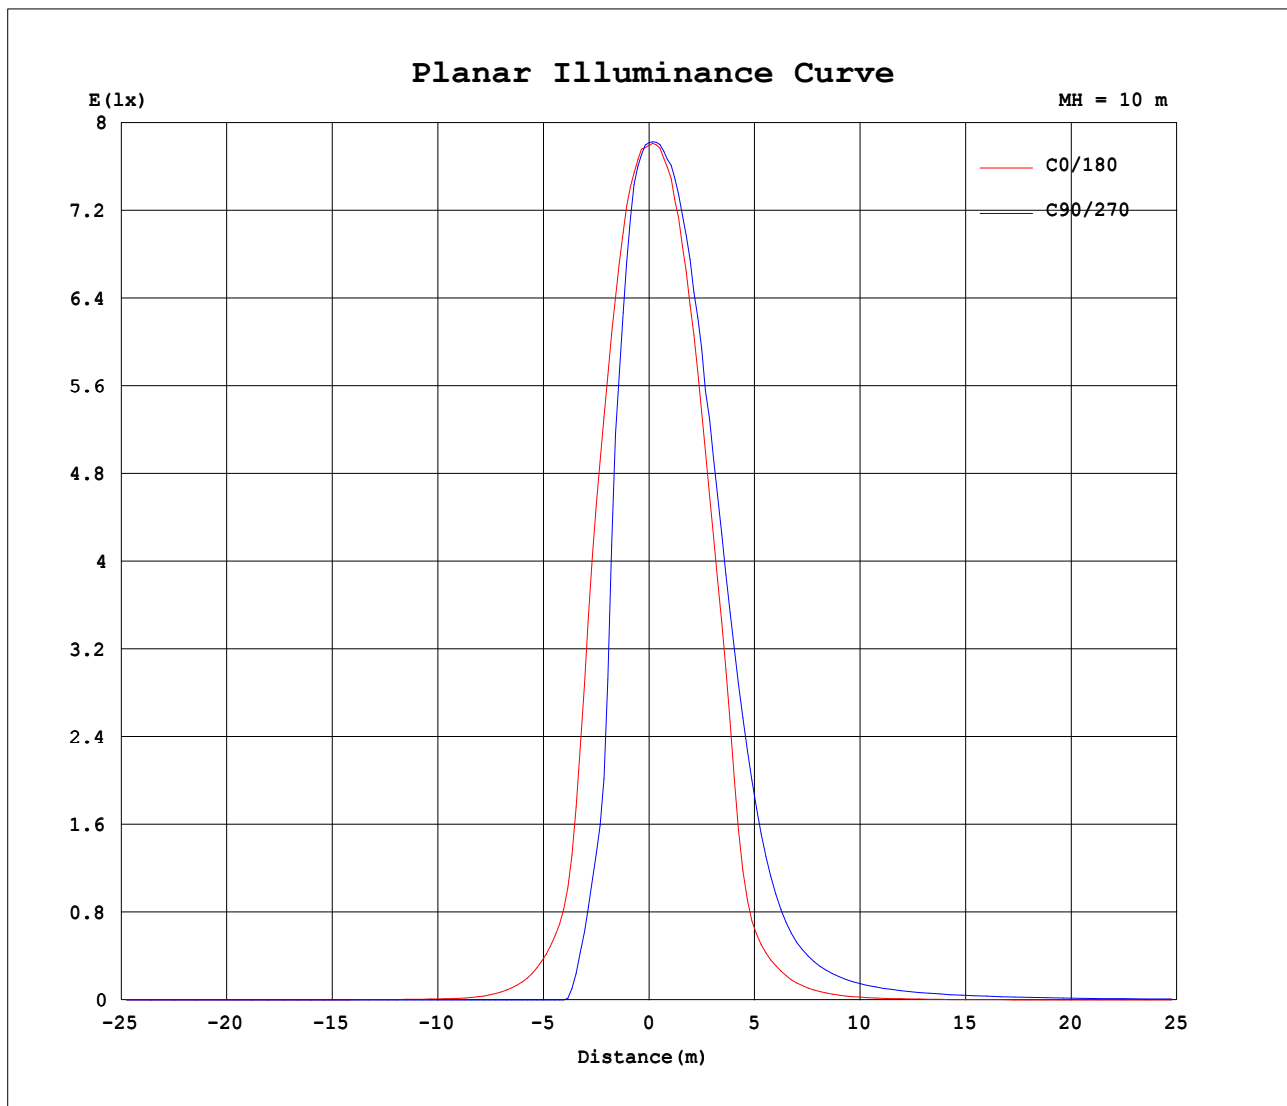


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.17V I:1.107A P:9.741W PF:0.7230 Freq:59.98Hz Lamp Flux:298.277x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight RGBWW	WEIGHT:
SPEC.:10W 2700K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWNLIGHT SHROUD

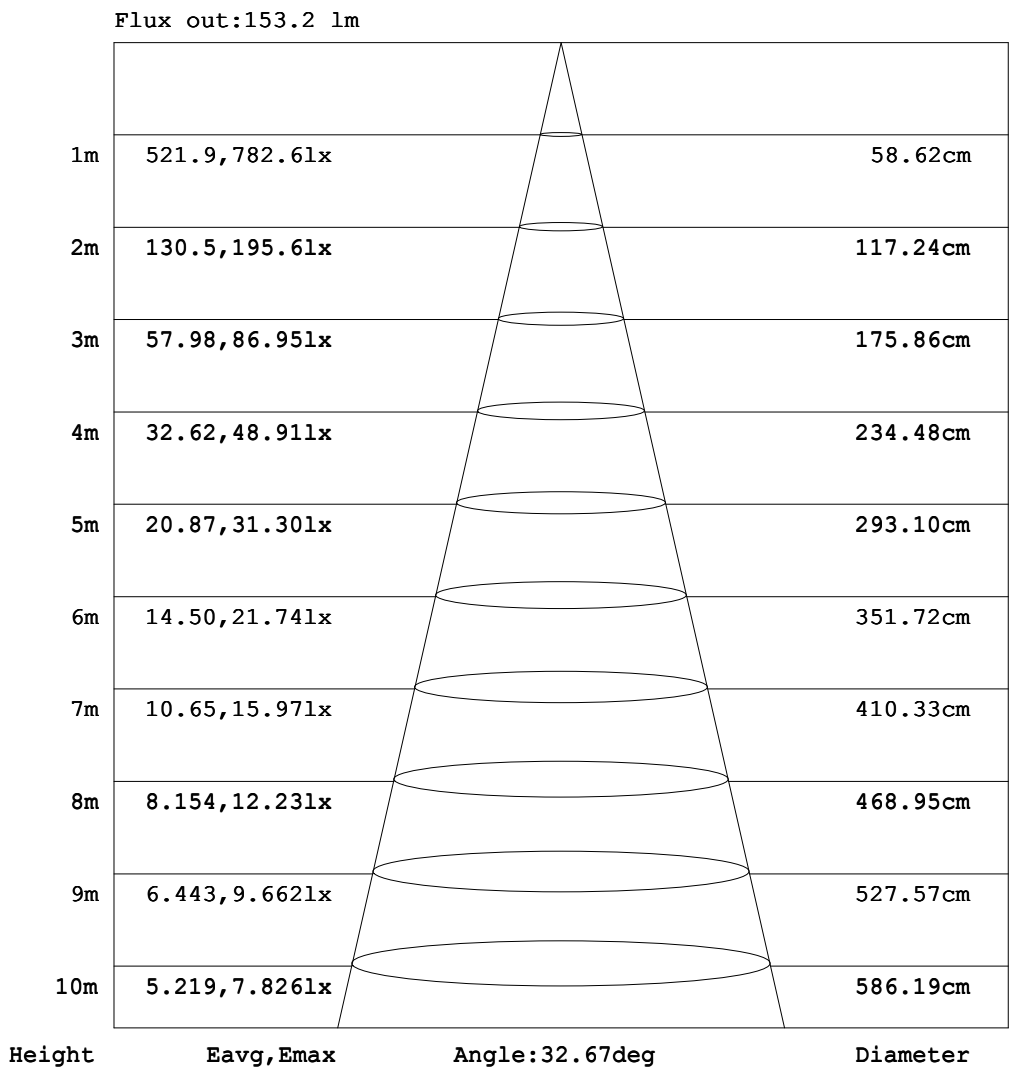

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.17V I:1.107A P:9.741W PF:0.7230 Freq:59.98Hz Lamp Flux:298.277x1 lm									
NAME: LED LANDSCAPE LIGHT					TYPE:Copper Spotlight RGBWW WEIGHT:				
SPEC.:10W 2700K 40°LENS					DIM.:			SERIAL No.:1	
MFR.: EVERFINE					SUR.:			Shielding Angle:DOWNLIGHT SHROUD	

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.26	0.68	1.21	1.75	2.20	2.47	2.60	2.73	2.80
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.07	0.14	0.42	0.87	1.45	2.06	2.57	2.90	3.06	3.14	3.31
-160	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.05	0.11	0.21	0.38	0.80	1.32	1.91	2.50	3.02	3.38	3.67	3.95
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.05	0.11	0.20	0.34	0.55	0.92	1.36	1.84	2.31	2.75	3.12	3.42
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.07	0.13	0.22	0.36	0.53	0.75	1.01	1.30	1.59	1.84	2.03
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.06	0.11	0.16	0.25	0.34	0.45	0.56	0.68	0.78	0.86
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.07	0.10	0.13	0.17	0.20	0.22	0.24
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.03	0.04	0.03	0.02	0.02	0.01	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.04	0.10	0.13	0.16	0.20	0.22	0.23	0.22	0.21	0.18	0.14	0.10	0.05	0.00
-60	0.00	0.00	0.00	0.01	0.11	0.20	0.29	0.37	0.45	0.51	0.55	0.58	0.56	0.52	0.46	0.37	0.26	0.13	0.00
-50	0.00	0.00	0.00	0.12	0.23	0.41	0.55	0.70	0.87	0.98	1.08	1.12	1.14	1.10	1.00	0.84	0.61	0.32	0.00
-40	0.00	0.00	0.02	0.19	0.40	0.61	0.87	1.12	1.40	1.63	1.88	2.14	2.44	2.67	2.83	2.68	2.14	1.20	0.00
-30	0.00	0.00	0.09	0.26	0.54	0.86	1.22	1.64	2.08	2.62	3.44	4.71	6.53	8.67	10.7	11.5	10.1	5.95	0.00
-20	0.00	0.00	0.13	0.36	0.69	1.11	1.58	2.15	2.91	4.17	6.50	10.7	17.5	27.4	38.3	54.4	72.6	58.6	12.9
-10	0.00	0.00	0.14	0.42	0.81	1.31	1.91	2.67	3.82	6.08	10.9	20.4	38.0	67.7	172	302	366	404	435
0	0.00	0.00	0.14	0.45	0.89	1.41	2.11	3.00	4.49	7.60	14.4	28.6	56.5	123	363	555	695	768	779
10	0.00	0.03	0.24	0.68	1.37	2.29	3.33	4.65	6.71	10.5	18.2	33.5	64.9	125	283	479	615	697	730
20	0.00	0.05	0.31	0.83	1.68	2.93	4.23	5.79	8.02	11.5	17.7	28.7	48.5	84.6	144	234	347	429	467
30	0.00	0.08	0.32	0.87	1.80	3.23	4.77	6.44	8.48	11.3	15.4	21.7	31.3	45.2	65.1	91.8	123	154	174
40	0.00	0.10	0.29	0.85	1.71	2.97	4.78	6.56	8.41	10.5	13.2	16.7	21.1	26.6	33.4	40.9	48.6	55.4	60.4
50	0.00	0.11	0.29	0.74	1.44	2.49	3.88	5.85	7.73	9.64	11.6	13.6	16.0	18.7	21.6	24.6	27.5	30.2	32.5
60	0.00	0.11	0.28	0.55	1.09	1.82	2.77	3.98	5.48	7.43	9.38	11.2	13.0	14.8	16.4	18.1	19.7	21.2	22.6
70	0.00	0.11	0.27	0.46	0.72	1.11	1.68	2.36	3.13	4.05	5.03	6.14	7.34	8.63	9.79	11.0	12.2	13.3	14.2
80	0.00	0.11	0.24	0.39	0.56	0.75	0.97	1.20	1.47	1.77	2.08	2.43	2.82	3.21	3.65	4.07	4.46	4.81	5.12
90	0.00	0.11	0.21	0.32	0.43	0.53	0.64	0.74	0.85	0.96	1.06	1.17	1.28	1.38	1.49	1.60	1.70	1.81	1.91
100	0.00	0.10	0.19	0.27	0.34	0.40	0.46	0.51	0.55	0.59	0.63	0.67	0.70	0.73	0.77	0.81	0.86	0.91	0.96
110	0.00	0.09	0.16	0.22	0.26	0.29	0.31	0.32	0.31	0.31	0.30	0.28	0.26	0.24	0.22	0.21	0.20	0.19	0.20
120	0.00	0.08	0.13	0.17	0.19	0.19	0.18	0.15	0.12	0.07	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.07	0.11	0.13	0.13	0.11	0.08	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.05	0.08	0.09	0.08	0.05	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.03	0.02	0.00
150	0.00	0.04	0.06	0.06	0.05	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.18	0.25	0.27	0.35	0.31
160	0.00	0.03	0.04	0.04	0.02	0.00	0.00	0.00	0.00	0.00	0.02	0.20	0.41	0.68	1.03	1.34	1.55	1.68	1.66
170	0.00	0.01	0.02	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.17	0.48	0.88	1.38	1.83	2.21	2.41	2.50	2.58
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.26	0.68	1.21	1.75	2.20	2.47	2.60	2.73	2.81

H(β) Range:-90 - 90DEG
 H(β) Interval: 0.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:ADMIN
 Test Date:2023-08-18

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
 Humidity:65.0%
 Test Distance:13.563m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.17V I:1.107A P:9.741W PF:0.7230 Freq:59.98Hz Lamp Flux:298.277x1 lm																		
NAME: LED LANDSCAPE LIGHT									TYPE:Copper Spotlight RGBWW WEIGHT:									
SPEC.:10W 2700K 40°LENS									DIM.:					SERIAL No.:1				
MFR.: EVERFINE									SUR.:					Shielding Angle:DOWNLIGHT SHROUD				

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	2.98	3.13	3.21	3.19	2.88	2.33	1.72	1.11	0.60	0.22	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-170	3.31	3.42	3.45	3.31	2.94	2.38	1.74	1.14	0.65	0.22	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
-160	3.83	3.69	3.49	3.09	2.58	2.00	1.41	0.92	0.46	0.16	0.05	0.02	0.01	0.00	0.00	0.00	0.00	0.00	
-150	3.25	3.00	2.65	2.26	1.80	1.36	0.93	0.54	0.27	0.11	0.05	0.02	0.00	0.00	0.00	0.00	0.00	0.00	
-140	1.91	1.73	1.49	1.24	0.98	0.67	0.44	0.22	0.13	0.07	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
-130	0.80	0.71	0.59	0.47	0.34	0.25	0.16	0.11	0.06	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.22	0.20	0.17	0.13	0.10	0.07	0.04	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.01	0.01	0.02	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.06	0.11	0.16	0.18	0.20	0.20	0.18	0.15	0.10	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	0.15	0.29	0.40	0.49	0.54	0.54	0.52	0.46	0.38	0.27	0.16	0.05	0.00	0.00	0.00	0.00	0.00	0.00	
-40	0.46	0.80	1.00	1.08	1.10	1.08	1.02	0.92	0.77	0.59	0.41	0.23	0.07	0.00	0.00	0.00	0.00	0.00	
-30	3.20	5.23	5.70	4.88	3.50	2.44	1.83	1.52	1.26	0.99	0.70	0.44	0.19	0.01	0.00	0.00	0.00	0.00	
-20	27.7	30.2	29.0	22.2	14.1	8.04	4.14	2.48	1.84	1.41	1.02	0.64	0.32	0.07	0.00	0.00	0.00	0.00	
-10	383	318	190	71.4	39.4	19.7	9.05	4.10	2.47	1.81	1.28	0.81	0.42	0.11	0.00	0.00	0.00	0.00	
0	751	637	450	160	66.6	30.7	13.4	5.52	2.97	2.09	1.46	0.91	0.48	0.14	0.00	0.00	0.00	0.00	
10	676	568	368	183	96.7	46.6	22.2	11.4	6.89	4.70	3.27	2.23	1.40	0.67	0.26	0.10	0.03	0.00	
20	399	305	209	128	71.4	39.0	22.1	13.7	9.22	6.52	4.65	3.29	2.14	1.06	0.47	0.18	0.05	0.00	
30	151	119	86.1	59.4	40.0	27.2	18.8	13.5	9.94	7.39	5.51	3.99	2.56	1.27	0.61	0.24	0.08	0.00	
40	54.7	47.3	39.3	31.7	25.1	19.8	15.6	12.3	9.67	7.60	5.84	4.15	2.42	1.31	0.66	0.27	0.10	0.00	
50	30.0	27.2	24.1	21.1	18.1	15.4	13.0	10.9	9.04	7.13	5.30	3.39	2.07	1.21	0.62	0.29	0.11	0.00	
60	21.1	19.5	17.9	16.2	14.4	12.6	10.8	8.98	7.01	5.08	3.60	2.48	1.62	0.97	0.54	0.28	0.11	0.00	
70	13.3	12.2	10.9	9.64	8.43	7.13	5.91	4.81	3.85	2.97	2.23	1.58	1.06	0.72	0.46	0.27	0.11	0.00	
80	4.81	4.44	4.04	3.62	3.18	2.79	2.41	2.08	1.77	1.47	1.20	0.97	0.75	0.56	0.39	0.24	0.11	0.00	
90	1.81	1.70	1.60	1.49	1.38	1.28	1.17	1.06	0.96	0.85	0.74	0.64	0.53	0.43	0.32	0.21	0.11	0.00	
100	0.91	0.86	0.81	0.77	0.73	0.70	0.67	0.63	0.59	0.55	0.51	0.46	0.40	0.34	0.27	0.19	0.10	0.00	
110	0.19	0.20	0.21	0.22	0.24	0.26	0.28	0.30	0.31	0.31	0.32	0.31	0.29	0.26	0.22	0.16	0.09	0.00	
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.07	0.12	0.15	0.18	0.19	0.19	0.17	0.13	0.08	0.00	
130	0.01	0.02	0.03	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.08	0.11	0.13	0.13	0.11	0.07	0.00	
140	0.09	0.18	0.22	0.24	0.22	0.14	0.07	0.00	0.00	0.00	0.00	0.01	0.05	0.08	0.09	0.08	0.05	0.00	
150	0.50	0.60	0.61	0.67	0.63	0.53	0.38	0.20	0.07	0.00	0.00	0.00	0.01	0.05	0.06	0.06	0.04	0.00	
160	1.83	1.87	1.81	1.62	1.35	1.10	0.82	0.55	0.25	0.05	0.00	0.00	0.00	0.02	0.04	0.04	0.03	0.00	
170	2.68	2.77	2.76	2.56	2.26	1.81	1.34	0.89	0.51	0.15	0.00	0.00	0.00	0.01	0.02	0.02	0.01	0.00	
180	2.98	3.13	3.21	3.19	2.88	2.33	1.72	1.11	0.60	0.22	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: