

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	714.9 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	107.8V x 130.5H
	At 50% of Imax	53.4V x 79.2H
	At 90% of Imax	20.9V x 33.5H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	922.3 lumens per klm.
	To 50% of Imax	552.0 lumens per klm.
	To 90% of Imax	124.2 lumens per klm.

Upward LOR	1.0 %
Downward LOR	99.0 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.18V I:1.302A P:11.47W PF:0.7239 Freq:59.97Hz Lamp Flux:270.791x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spotlight	RGBWWWEIGHT:
SPEC.:12W GREEN 60°LENS	DIM.:	SERIAL No.:2
MFR.: EVERFINE	SUR.:	Shielding Angle:FLOOD-LIGHT SHROUD

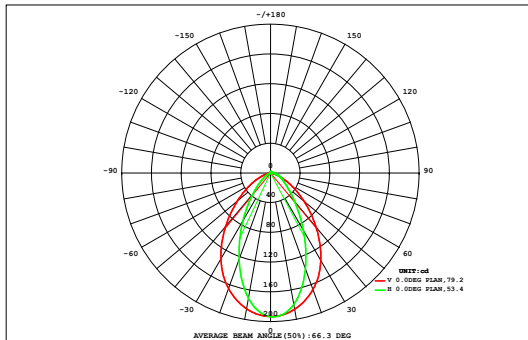

DATA OF LAMP		Eff:23.60lm/W	
MODEL	F9A1-12W-BZ	Imax (cd)	193.6
NOMINAL POWER (W)	12	AVAILABILITY (%)	92.4
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	250.2
NOMINAL FLUX (lm)	270.791	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	270.8
TEST VOLTAGE (V)	12	θ @50% (H,V)	79,53DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.01	0.01	0.03	0.04	0.06	0.08	0.09	0.09	0.08	0.06	0.04	0.03	0.01	0.01	0.00	0.00	0.63	0.00
90	0.00	0.00	0.02	0.05	0.09	0.15	0.20	0.24	0.27	0.26	0.23	0.19	0.14	0.09	0.04	0.02	0.00	0.00	1.98	0.00
80	0.00	0.01	0.04	0.11	0.21	0.31	0.40	0.45	0.47	0.47	0.45	0.39	0.30	0.20	0.10	0.04	0.01	0.00	3.93	0.02
70	0.00	0.01	0.08	0.20	0.36	0.53	0.68	0.76	0.75	0.75	0.75	0.67	0.53	0.35	0.19	0.07	0.01	0.00	6.69	5.21
60	0.00	0.02	0.12	0.30	0.56	0.85	1.11	1.26	1.26	1.26	1.27	1.11	0.85	0.56	0.29	0.11	0.02	0.00	11.0	10.2
50	0.00	0.03	0.17	0.42	0.81	1.28	1.75	2.09	2.16	2.16	2.10	1.76	1.29	0.81	0.42	0.15	0.03	0.00	17.4	17.0
40	0.00	0.04	0.21	0.55	1.09	1.81	2.57	3.20	3.47	3.47	3.22	2.59	1.82	1.10	0.55	0.20	0.04	0.00	25.9	25.6
30	0.00	0.05	0.24	0.66	1.37	2.33	3.39	4.31	4.84	4.84	4.33	3.42	2.35	1.38	0.66	0.23	0.04	0.00	34.5	34.2
20	0.00	0.05	0.27	0.74	1.57	2.72	3.98	5.01	5.65	5.66	5.04	4.02	2.76	1.59	0.75	0.26	0.05	0.00	40.1	39.8
10	0.00	0.05	0.26	0.74	1.56	2.70	3.93	4.94	5.55	5.56	4.97	3.97	2.73	1.57	0.74	0.25	0.05	0.00	39.6	39.3
0	0.00	0.05	0.23	0.64	1.32	2.25	3.27	4.11	4.55	4.56	4.14	3.30	2.28	1.33	0.64	0.22	0.04	0.00	32.9	32.6
-10	0.00	0.04	0.19	0.51	1.02	1.69	2.39	2.94	3.10	3.11	2.96	2.41	1.71	1.03	0.51	0.18	0.03	0.00	23.8	23.4
-20	0.00	0.03	0.14	0.37	0.73	1.14	1.54	1.79	1.78	1.79	1.81	1.55	1.15	0.73	0.37	0.13	0.02	0.00	15.1	14.5
-30	0.00	0.02	0.09	0.24	0.46	0.70	0.89	0.97	0.89	0.89	0.97	0.90	0.70	0.45	0.23	0.08	0.01	0.00	8.50	7.55
-40	0.00	0.01	0.05	0.13	0.25	0.37	0.46	0.47	0.41	0.41	0.47	0.45	0.36	0.24	0.12	0.04	0.01	0.00	4.26	0.82
-50	0.00	0.00	0.02	0.06	0.10	0.15	0.17	0.17	0.13	0.13	0.16	0.16	0.14	0.09	0.05	0.01	0.00	0.00	1.54	0.00
-60	0.00	0.00	0.00	0.01	0.02	0.04	0.04	0.03	0.01	0.01	0.03	0.03	0.03	0.02	0.01	0.00	0.00	0.00	0.29	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00
-90 -80 -70 -60 -50 -40 -30 -20 HORIZONTAL (DEG) 20 30 40 50 60 70 80 90																				
Φ t	0.01	0.42	2.14	5.76	11.6	19.0	26.8	32.8	35.4	35.4	33.0	27.0	19.2	11.6	5.67	2.01	0.36	0.01	268	---
Φ a	0.00	0.00	0.71	4.61	10.4	17.9	25.6	31.6	34.0	34.1	31.7	25.8	18.1	10.5	4.55	0.63	0.00	0.00	---	250


one-half-peak spread: U:26.5,D:27.3 , L:40.7,R:39.3 NEMA Beam Type: Type 7 x 6 (H x V)

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.18V I:1.302A P:11.47W PF:0.7239 Freq:59.97Hz Lamp Flux:270.79lx1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spotlight RGBWWEIGHT:	
SPEC.:12W GREEN 60°LENS	DIM.:	SERIAL No.:2
MFR.: EVERFINE	SUR.:	Shielding Angle:FLOOD-LIGHT SHROUD

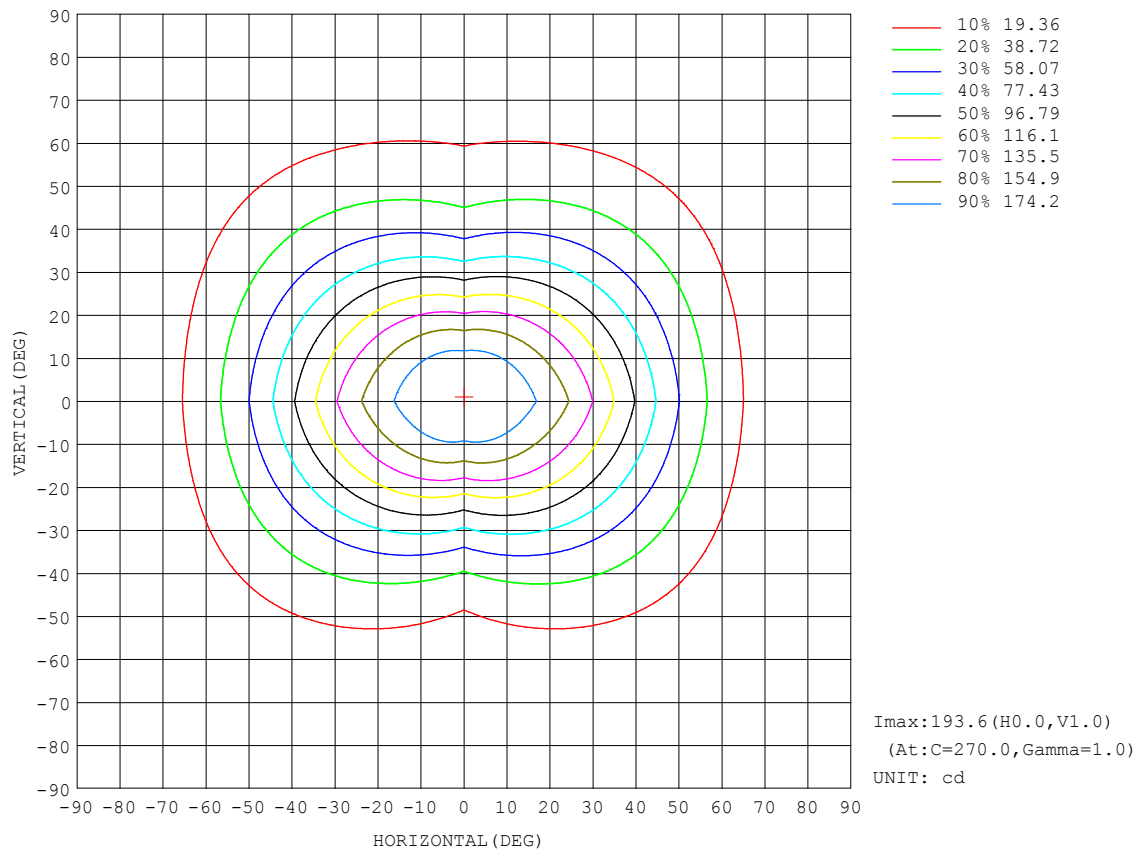


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.18V I:1.302A P:11.47W PF:0.7239 Freq:59.97Hz Lamp Flux:270.791x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spotlight RGBWWEIGHT:	
SPEC.:12W GREEN 60°LENS	DIM.:	SERIAL No.:2
MFR.: EVERFINE	SUR.:	Shielding Angle:FLOOD-LIGHT SHROUD

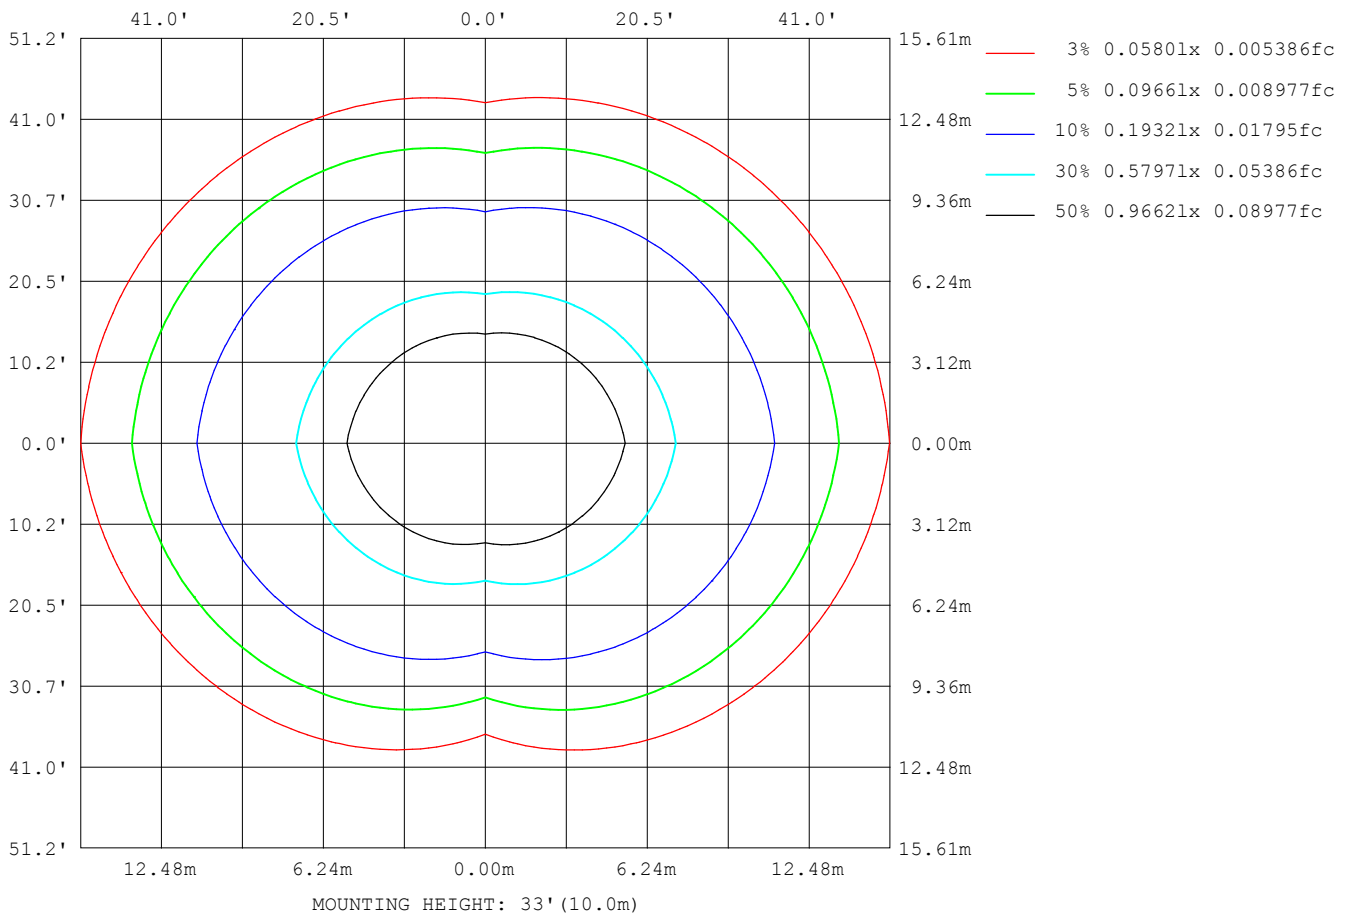

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

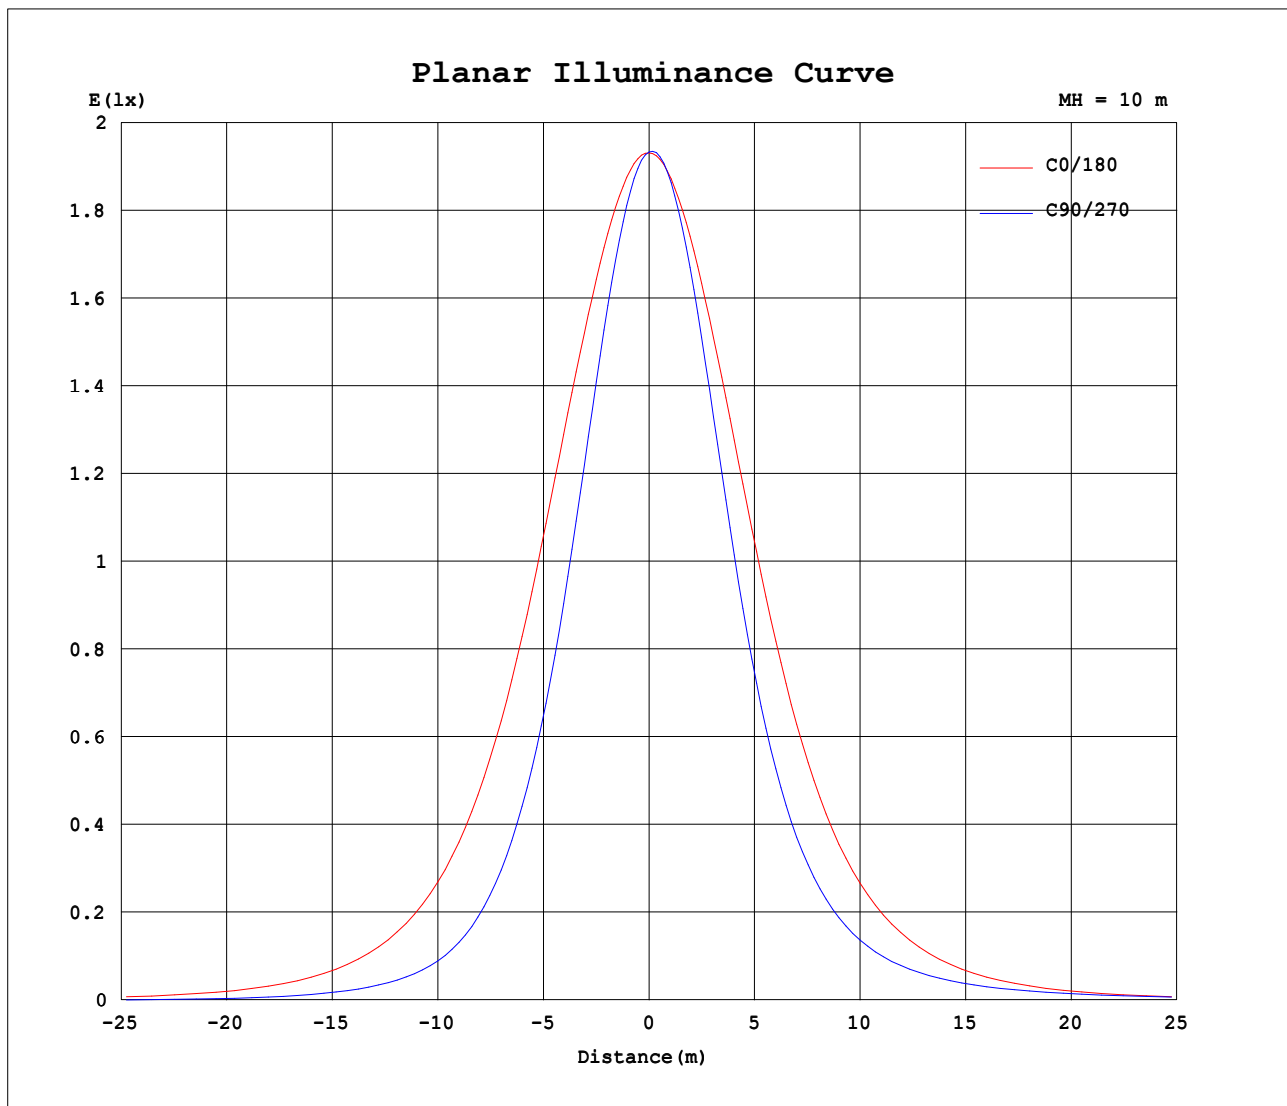


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.18V I:1.302A P:11.47W PF:0.7239 Freq:59.97Hz Lamp Flux:270.791x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spotlight RGBWWEIGHT:	
SPEC.:12W GREEN 60°LENS	DIM.:	SERIAL No.:2
MFR.: EVERFINE	SUR.:	Shielding Angle:FLOOD-LIGHT SHROUD

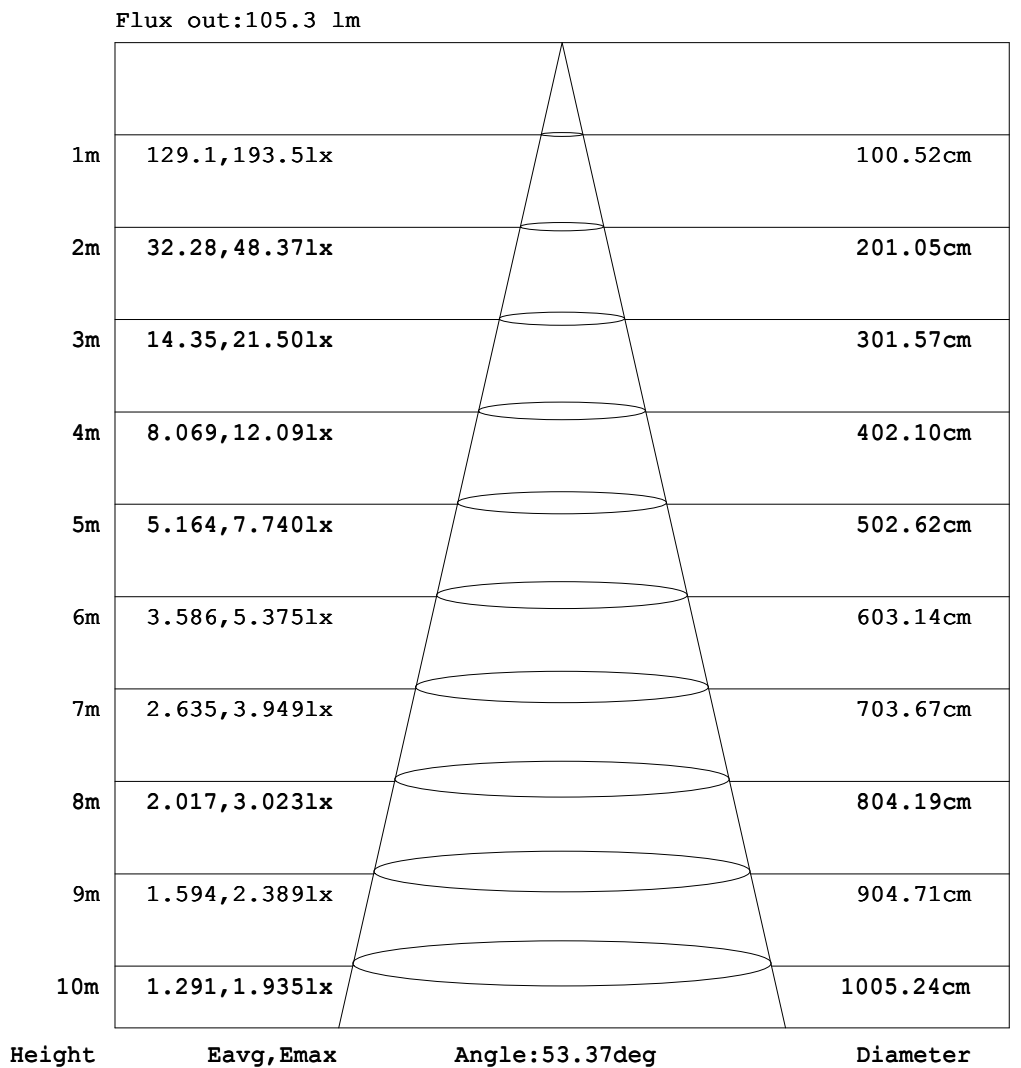

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.18V I:1.302A P:11.47W PF:0.7239 Freq:59.97Hz Lamp Flux:270.791x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spotlight	RGBWWWEIGHT:
SPEC.:12W GREEN 60°LENS	DIM.:	SERIAL No.:2
MFR.: EVERFINE	SUR.:	Shielding Angle:FLOOD-LIGHT SHROUD

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.08	0.19	0.35	0.50	0.66	0.83	1.01	1.20	1.36	1.52	1.68	1.82	1.92	1.97
-170	0.00	0.00	0.00	0.00	0.00	0.07	0.18	0.32	0.47	0.64	0.80	0.97	1.16	1.32	1.49	1.64	1.77	1.87	1.91
-160	0.00	0.00	0.00	0.00	0.00	0.04	0.15	0.27	0.39	0.56	0.70	0.85	1.01	1.17	1.31	1.44	1.55	1.62	1.66
-150	0.00	0.00	0.00	0.00	0.00	0.01	0.09	0.19	0.30	0.41	0.55	0.67	0.79	0.92	1.03	1.13	1.20	1.26	1.27
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.10	0.18	0.27	0.36	0.44	0.55	0.63	0.70	0.76	0.81	0.85	0.86
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.07	0.12	0.18	0.23	0.29	0.35	0.38	0.42	0.45	0.46	0.47
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.06	0.09	0.12	0.14	0.17	0.18	0.19	0.19
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.02
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.10	0.16	0.24	0.29	0.32	0.32	0.30	0.25	0.18	0.09	0.00
-70	0.00	0.00	0.00	0.01	0.19	0.58	1.08	1.64	2.16	2.59	2.87	3.02	3.07	2.98	2.76	2.41	1.94	1.36	0.71
-60	0.00	0.00	0.00	0.39	1.28	2.51	3.85	5.14	6.41	7.60	8.64	9.53	10.2	10.5	10.5	10.1	9.32	8.21	6.81
-50	0.00	0.00	0.16	1.25	3.10	5.32	7.76	10.4	13.1	15.9	18.5	20.8	22.5	23.5	23.8	23.3	22.0	19.9	17.3
-40	0.00	0.00	0.49	2.41	5.28	8.72	12.7	17.2	22.1	27.1	31.8	36.2	39.9	42.7	44.5	45.0	44.0	41.5	37.3
-30	0.00	0.00	0.89	3.64	7.55	12.4	18.2	25.0	32.4	40.3	48.3	56.2	63.7	70.5	76.1	79.8	81.1	79.4	74.5
-20	0.00	0.00	1.28	4.76	9.63	15.9	23.5	32.6	42.9	54.3	66.5	79.1	91.7	103	114	121	126	128	124
-10	0.00	0.00	1.56	5.58	11.2	18.6	27.9	39.1	52.1	66.9	83.1	100	117	132	146	157	166	172	171
0	0.00	0.00	1.67	5.98	12.1	20.2	30.5	43.1	58.0	75.3	94.4	114	134	151	165	177	186	191	193
10	0.00	0.03	1.67	5.84	11.7	19.2	28.6	40.0	53.3	68.3	84.9	102	119	136	150	162	172	178	180
20	0.00	0.06	1.49	5.25	10.5	17.1	25.0	34.4	45.1	57.0	69.8	83.1	96.3	109	120	129	136	139	137
30	0.00	0.08	1.18	4.29	8.71	14.1	20.4	27.5	35.4	43.8	52.6	61.5	70.0	77.7	84.3	89.1	91.7	91.5	88.1
40	0.00	0.09	0.82	3.15	6.60	10.7	15.4	20.5	25.9	31.4	36.8	42.0	46.6	50.6	53.5	55.2	55.4	54.1	51.1
50	0.00	0.09	0.50	1.99	4.41	7.38	10.6	14.1	17.6	21.0	24.2	27.1	29.5	31.3	32.4	32.9	32.5	31.5	29.7
60	0.00	0.09	0.30	1.04	2.42	4.28	6.39	8.57	10.7	12.8	14.7	16.4	17.8	18.8	19.5	19.8	19.8	19.4	18.8
70	0.00	0.07	0.24	0.51	1.05	1.90	2.95	4.14	5.37	6.59	7.72	8.76	9.67	10.4	11.0	11.5	11.8	11.9	12.0
80	0.00	0.05	0.15	0.30	0.50	0.75	1.04	1.41	1.83	2.29	2.78	3.27	3.76	4.22	4.65	5.05	5.40	5.70	5.97
90	0.00	0.03	0.06	0.09	0.12	0.15	0.17	0.20	0.23	0.26	0.29	0.32	0.35	0.38	0.41	0.44	0.47	0.49	0.52
100	0.00	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.03	0.04	0.04	0.03	0.02	0.01	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.07	0.10	0.12	0.12	0.13	0.11	0.10	0.10	0.10	0.08
140	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.07	0.12	0.18	0.22	0.25	0.33	0.35	0.41	0.40	0.41	0.42	0.40
150	0.00	0.00	0.00	0.00	0.00	0.01	0.07	0.15	0.23	0.30	0.41	0.48	0.57	0.66	0.76	0.80	0.83	0.82	0.78
160	0.00	0.00	0.00	0.00	0.00	0.04	0.13	0.23	0.33	0.47	0.59	0.72	0.86	0.98	1.08	1.19	1.25	1.26	1.25
170	0.00	0.00	0.00	0.00	0.00	0.07	0.17	0.30	0.43	0.59	0.74	0.91	1.07	1.21	1.37	1.51	1.61	1.68	1.66
180	0.00	0.00	0.00	0.00	0.00	0.08	0.19	0.35	0.50	0.66	0.83	1.01	1.20	1.36	1.52	1.68	1.82	1.92	1.97

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.18V I:1.302A P:11.47W PF:0.7239 Freq:59.97Hz Lamp Flux:270.791x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spotlight	RGBWWWEIGHT:
SPEC.:12W GREEN 60°LENS	DIM.:	SERIAL No.:2
MFR.: EVERFINE	SUR.:	Shielding Angle:FLOOD-LIGHT SHROUD

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	1.95	1.84	1.77	1.64	1.51	1.35	1.19	1.05	0.86	0.67	0.56	0.33	0.18	0.10	0.00	0.00	0.00	0.00	
-170	1.88	1.81	1.69	1.56	1.44	1.30	1.12	0.99	0.78	0.62	0.48	0.31	0.16	0.07	0.00	0.00	0.00	0.00	
-160	1.63	1.58	1.50	1.38	1.27	1.13	1.00	0.86	0.69	0.58	0.41	0.28	0.14	0.02	0.00	0.00	0.00	0.00	
-150	1.27	1.24	1.18	1.10	1.00	0.90	0.79	0.66	0.55	0.41	0.30	0.19	0.11	0.00	0.00	0.00	0.00	0.00	
-140	0.87	0.85	0.81	0.77	0.70	0.62	0.53	0.49	0.37	0.28	0.20	0.12	0.02	0.00	0.00	0.00	0.00	0.00	
-130	0.48	0.47	0.46	0.45	0.42	0.35	0.32	0.26	0.22	0.13	0.10	0.02	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.20	0.20	0.19	0.18	0.17	0.14	0.10	0.09	0.07	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.02	0.02	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.07	0.12	0.17	0.20	0.21	0.21	0.18	0.15	0.10	0.05	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	1.30	1.82	2.23	2.53	2.69	2.72	2.63	2.44	2.12	1.70	1.23	0.75	0.37	0.11	0.00	0.00	0.00	0.00	
-60	8.18	9.26	9.99	10.3	10.3	9.88	9.14	8.17	7.05	5.81	4.50	3.21	1.94	0.89	0.24	0.00	0.00	0.00	
-50	20.0	22.0	23.3	23.9	23.5	22.4	20.6	18.3	15.5	12.6	9.70	7.03	4.58	2.45	0.85	0.08	0.00	0.00	
-40	41.6	44.2	45.2	44.8	43.0	40.1	36.4	31.9	27.0	21.8	16.7	12.0	7.90	4.49	1.81	0.30	0.00	0.00	
-30	79.6	81.4	80.3	76.7	71.2	64.4	56.7	48.6	40.5	32.4	24.6	17.6	11.5	6.67	2.89	0.57	0.00	0.00	
-20	128	127	122	114	104	92.7	80.0	67.2	54.7	43.1	32.5	23.0	15.0	8.70	3.92	0.86	0.00	0.00	
-10	172	167	158	147	134	118	101	84.1	67.6	52.5	39.1	27.5	17.8	10.3	4.69	1.08	0.00	0.00	
0	191	186	178	167	153	135	116	95.6	76.2	58.5	43.1	30.1	19.4	11.1	5.06	1.17	0.00	0.00	
10	178	172	163	151	137	121	103	85.9	69.0	53.6	40.0	28.2	18.4	10.7	4.95	1.19	0.03	0.00	
20	139	137	130	121	110	97.3	84.0	70.5	57.4	45.3	34.3	24.5	16.2	9.56	4.41	1.08	0.06	0.00	
30	91.7	92.0	89.6	84.9	78.4	70.6	62.0	53.0	44.0	35.4	27.2	19.7	13.2	7.83	3.55	0.87	0.08	0.00	
40	54.2	55.6	55.5	53.8	50.9	46.9	42.2	36.9	31.3	25.6	19.9	14.7	9.92	5.82	2.55	0.63	0.09	0.00	
50	31.5	32.6	33.0	32.5	31.3	29.4	26.9	23.9	20.6	17.0	13.4	9.89	6.64	3.76	1.59	0.42	0.09	0.00	
60	19.4	19.7	19.7	19.4	18.6	17.5	16.0	14.3	12.3	10.1	7.93	5.76	3.72	2.03	0.89	0.30	0.09	0.00	
70	11.9	11.7	11.3	10.8	10.1	9.32	8.37	7.30	6.13	4.92	3.72	2.61	1.68	0.97	0.51	0.24	0.07	0.00	
80	5.68	5.34	4.97	4.56	4.11	3.65	3.16	2.69	2.22	1.78	1.38	1.04	0.75	0.50	0.30	0.15	0.05	0.00	
90	0.49	0.47	0.44	0.41	0.38	0.35	0.32	0.29	0.26	0.23	0.20	0.17	0.15	0.12	0.09	0.06	0.03	0.00	
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00	
110	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
120	0.02	0.04	0.06	0.08	0.09	0.08	0.07	0.07	0.06	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
130	0.11	0.12	0.14	0.18	0.20	0.19	0.20	0.17	0.17	0.10	0.09	0.02	0.00	0.00	0.00	0.00	0.00	0.00	
140	0.44	0.45	0.45	0.48	0.41	0.40	0.34	0.34	0.28	0.22	0.17	0.11	0.02	0.00	0.00	0.00	0.00	0.00	
150	0.83	0.86	0.84	0.84	0.73	0.68	0.61	0.52	0.44	0.34	0.26	0.17	0.11	0.00	0.00	0.00	0.00	0.00	
160	1.28	1.28	1.25	1.15	1.08	0.98	0.86	0.75	0.60	0.51	0.37	0.26	0.13	0.02	0.00	0.00	0.00	0.00	
170	1.69	1.65	1.55	1.44	1.33	1.21	1.06	0.92	0.73	0.59	0.46	0.30	0.16	0.07	0.00	0.00	0.00	0.00	
180	1.95	1.84	1.77	1.64	1.51	1.35	1.19	1.05	0.86	0.67	0.56	0.33	0.18	0.10	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: