

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	755.3 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	107.8V x 125.7H
	At 50% of Imax	52.1V x 74.5H
	At 90% of Imax	20.2V x 34.5H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	913.8 lumens per klm.
	To 50% of Imax	539.1 lumens per klm.
	To 90% of Imax	134.1 lumens per klm.

Upward LOR	1.2 %
Downward LOR	98.8 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-02-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.25V I:1.184A P:13.42W PF:0.9252 Freq:49.99Hz Lamp Flux:685.783x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot light	WEIGHT:
SPEC.:15W 3000K 60°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:FLOOD-LIGHT SHROUD

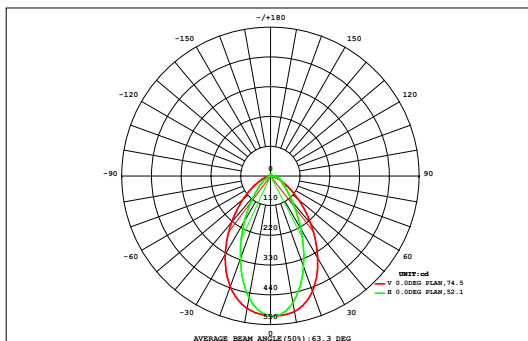

DATA OF LAMP		Eff:51.11lm/W	
MODEL	F5A1-15W-30K-BK	Imax (cd)	518.0
NOMINAL POWER (W)	15	AVAILABILITY (%)	91.4
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	626.9
NOMINAL FLUX (lm)	685.783	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	685.8
TEST VOLTAGE (V)	12	θ @50% (H,V)	74,52DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.01	0.04	0.07	0.11	0.16	0.21	0.25	0.25	0.21	0.16	0.11	0.07	0.04	0.01	0.00	0.00	1.70	0.00
90	0.00	0.01	0.04	0.12	0.24	0.38	0.52	0.64	0.72	0.72	0.64	0.51	0.37	0.23	0.12	0.04	0.01	0.00	5.32	0.00
80	0.00	0.02	0.10	0.27	0.50	0.76	1.00	1.17	1.25	1.25	1.16	0.99	0.76	0.50	0.26	0.09	0.02	0.00	10.1	0.00
70	0.00	0.03	0.18	0.46	0.84	1.27	1.65	1.88	1.92	1.92	1.89	1.65	1.27	0.84	0.45	0.17	0.03	0.00	16.5	11.4
60	0.00	0.05	0.27	0.69	1.30	2.00	2.66	3.08	3.12	3.13	3.10	2.68	2.02	1.30	0.68	0.27	0.05	0.00	26.4	24.1
50	0.00	0.08	0.37	0.95	1.87	3.03	4.23	5.14	5.40	5.43	5.22	4.30	3.08	1.88	0.95	0.36	0.07	0.00	42.4	40.8
40	0.00	0.09	0.45	1.23	2.53	4.32	6.35	8.12	8.91	8.97	8.27	6.51	4.42	2.57	1.24	0.45	0.09	0.00	64.5	63.3
30	0.00	0.11	0.53	1.49	3.18	5.65	8.58	11.2	12.7	12.8	11.5	8.84	5.82	3.25	1.50	0.52	0.10	0.00	87.8	86.8
20	0.00	0.11	0.57	1.66	3.67	6.67	10.2	13.3	15.1	15.2	13.7	10.6	6.90	3.76	1.68	0.57	0.11	0.00	104	103
10	0.00	0.11	0.56	1.64	3.63	6.61	10.1	13.2	14.9	15.0	13.5	10.5	6.84	3.73	1.66	0.55	0.11	0.00	103	102
0	0.00	0.10	0.49	1.43	3.08	5.48	8.31	10.8	12.1	12.2	11.1	8.58	5.65	3.15	1.44	0.49	0.09	0.00	84.4	83.4
-10	0.00	0.08	0.40	1.13	2.37	4.06	5.97	7.56	8.11	8.18	7.71	6.12	4.16	2.41	1.14	0.40	0.08	0.00	59.9	58.6
-20	0.00	0.06	0.30	0.81	1.66	2.71	3.76	4.51	4.58	4.61	4.58	3.84	2.76	1.68	0.81	0.29	0.05	0.00	37.0	35.3
-30	0.00	0.04	0.20	0.52	1.03	1.64	2.16	2.42	2.30	2.31	2.44	2.18	1.65	1.03	0.51	0.19	0.03	0.00	20.6	17.5
-40	0.00	0.02	0.11	0.28	0.53	0.82	1.07	1.18	1.09	1.09	1.18	1.08	0.82	0.52	0.28	0.10	0.01	0.00	10.2	1.08
-50	0.00	0.00	0.04	0.12	0.22	0.31	0.37	0.37	0.30	0.30	0.37	0.36	0.30	0.21	0.11	0.03	0.00	0.00	3.42	0.00
-60	0.00	0.00	0.01	0.02	0.05	0.07	0.08	0.06	0.03	0.03	0.06	0.08	0.07	0.05	0.02	0.00	0.00	0.00	0.62	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90 -80 -70 -60 -50 -40 -30 -20 HORIZONTAL (DEG) 20 30 40 50 60 70 80 90																				
Φ t	0.02	0.91	4.62	12.9	26.8	45.9	67.2	84.8	92.7	93.4	86.6	69.0	47.0	27.2	12.9	4.55	0.86	0.02	677	---
Φ a	0.00	0.00	0.66	9.35	23.5	42.6	63.9	81.4	89.1	89.7	83.2	65.7	43.8	24.0	9.40	0.64	0.00	0.00	---	627

one-half-peak spread: U:26.1,D:26.4 , L:39.1,R:33.9


NEMA Beam Type: Type 6

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-02-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.25V I:1.184A P:13.42W PF:0.9252 Freq:49.99Hz Lamp Flux:685.783x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot light	WEIGHT:
SPEC.:15W 3000K 60°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:FLOOD-LIGHT SHROUD

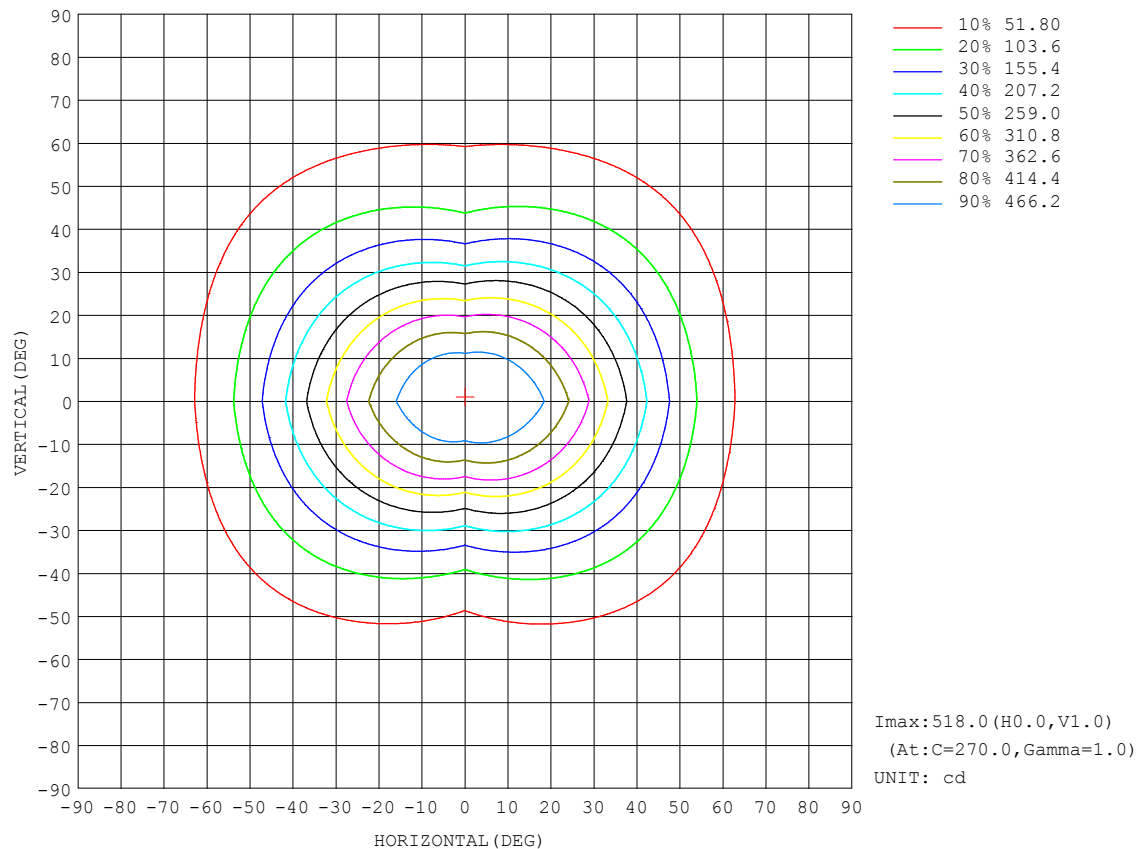


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-02-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.25V I:1.184A P:13.42W PF:0.9252 Freq:49.99Hz Lamp Flux:685.783x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot light	WEIGHT:
SPEC.:15W 3000K 60°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:FLOOD-LIGHT SHROUD

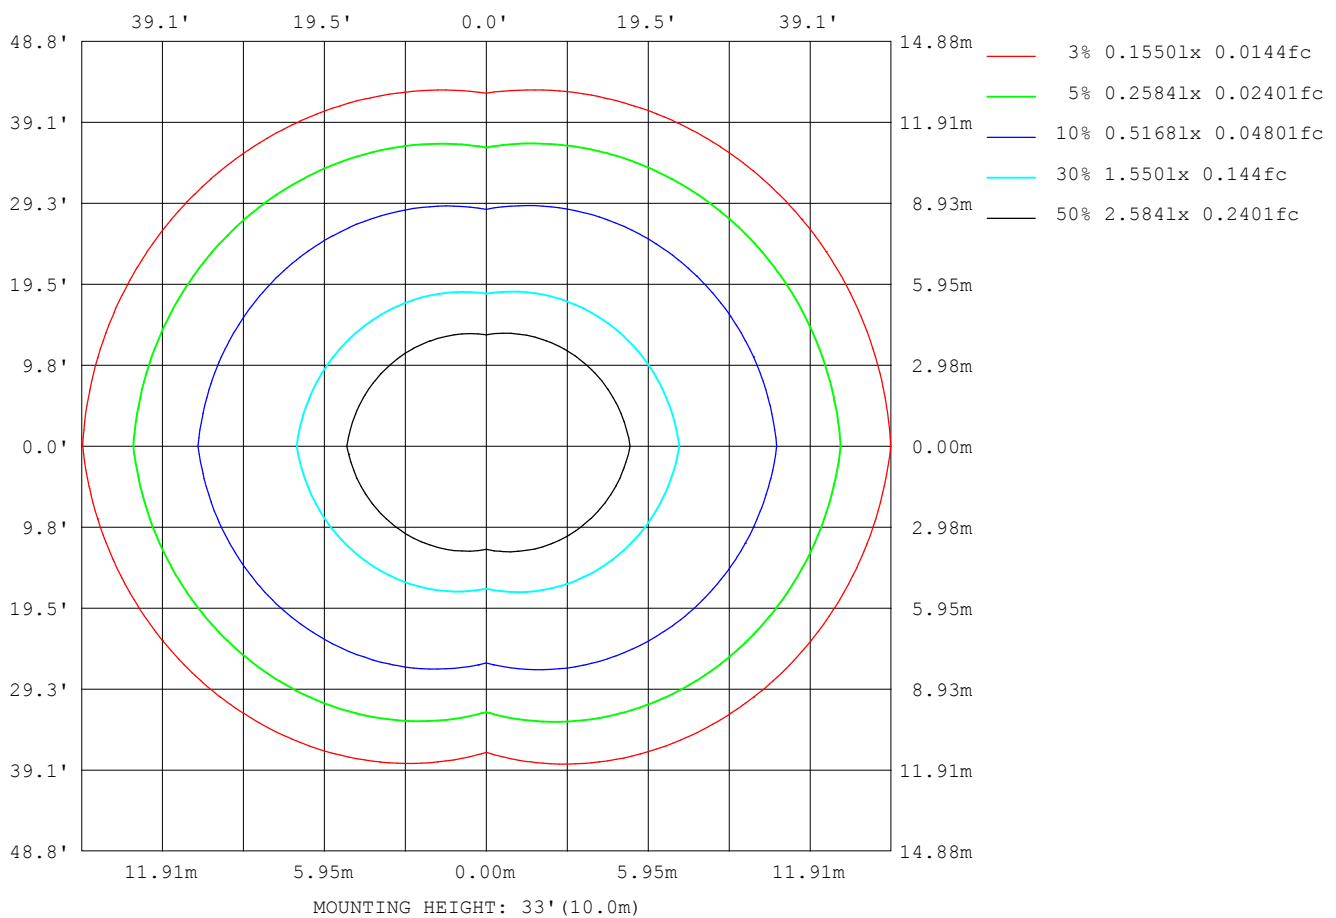

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-02-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

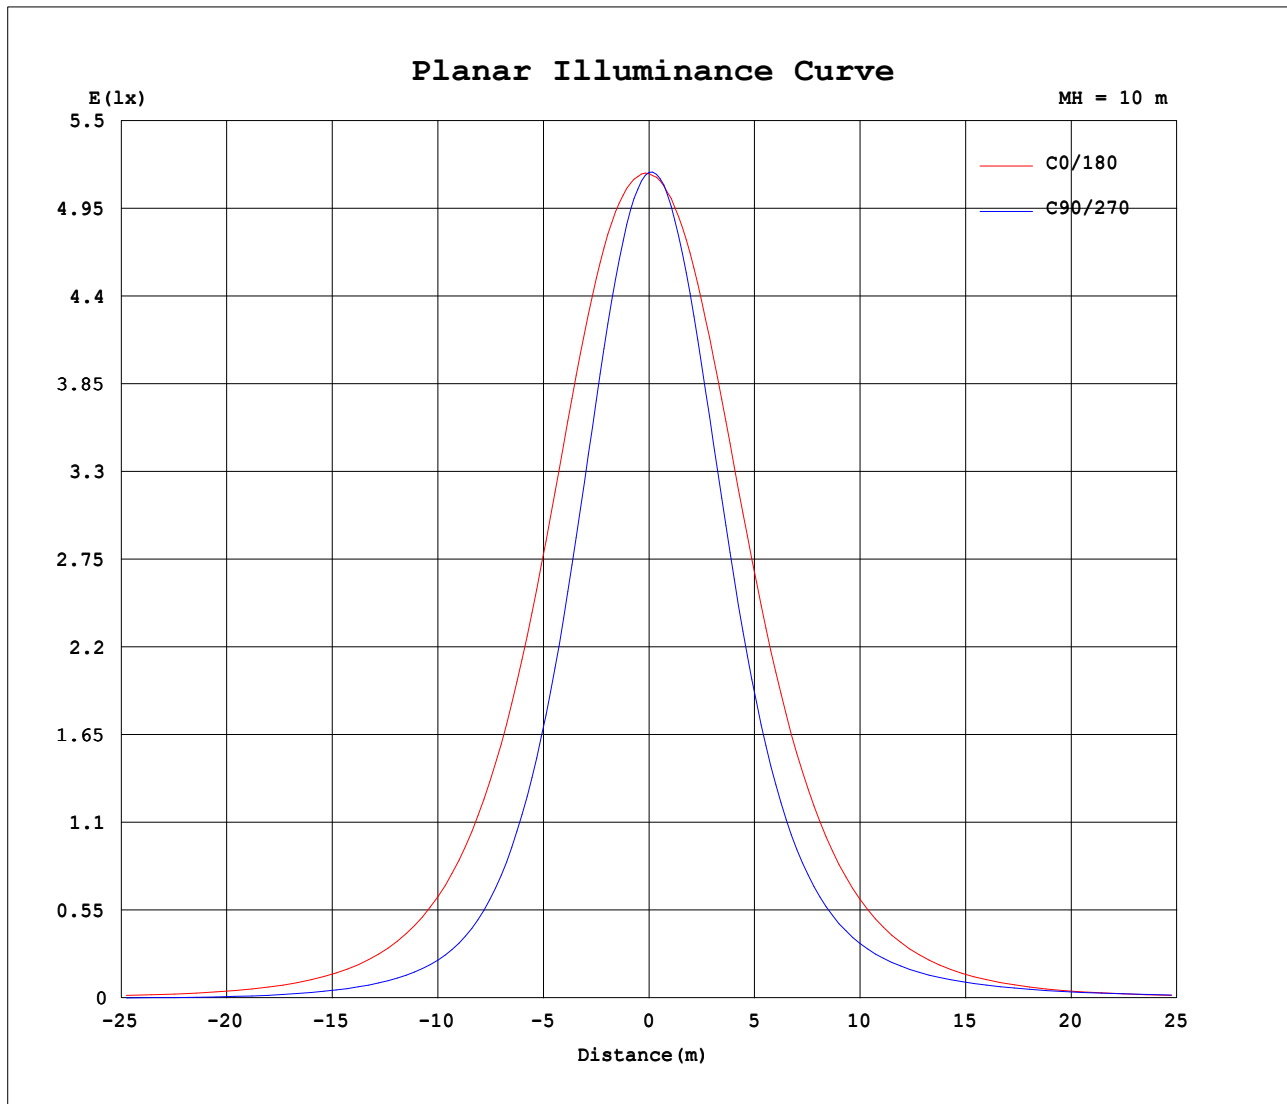


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-02-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.25V I:1.184A P:13.42W PF:0.9252 Freq:49.99Hz Lamp Flux:685.783x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot light	WEIGHT:
SPEC.:15W 3000K 60°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:FLOOD-LIGHT SHROUD

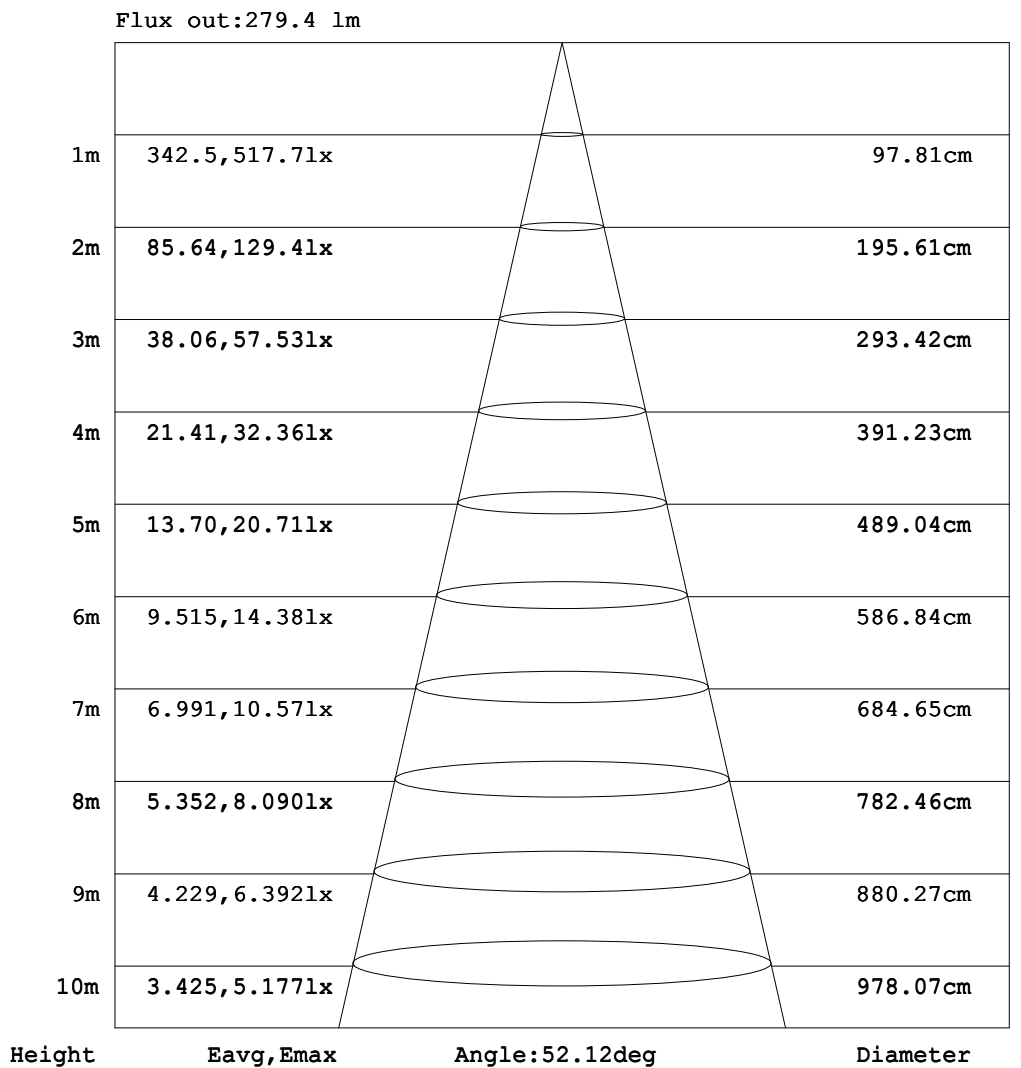

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-02-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.25V I:1.184A P:13.42W PF:0.9252 Freq:49.99Hz Lamp Flux:685.783x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot light	WEIGHT:
SPEC.:15W 3000K 60°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:FLOOD-LIGHT SHROUD

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.08	0.26	0.49	0.80	1.13	1.55	2.01	2.48	2.97	3.43	3.90	4.34	4.77	5.15	5.43	5.60
-170	0.00	0.00	0.00	0.07	0.25	0.47	0.77	1.09	1.48	1.92	2.39	2.88	3.35	3.82	4.26	4.66	5.00	5.26	5.40
-160	0.00	0.00	0.00	0.05	0.22	0.42	0.67	0.97	1.31	1.71	2.11	2.55	2.98	3.39	3.78	4.12	4.42	4.61	4.73
-150	0.00	0.00	0.01	0.03	0.17	0.34	0.54	0.80	1.06	1.37	1.70	2.05	2.38	2.72	3.03	3.29	3.51	3.65	3.73
-140	0.00	0.00	0.01	0.02	0.11	0.24	0.39	0.57	0.79	0.99	1.23	1.47	1.71	1.94	2.16	2.32	2.47	2.57	2.61
-130	0.00	0.00	0.00	0.02	0.04	0.14	0.25	0.37	0.50	0.64	0.80	0.93	1.08	1.21	1.33	1.44	1.52	1.57	1.59
-120	0.00	0.00	0.00	0.01	0.03	0.05	0.11	0.19	0.27	0.35	0.43	0.51	0.59	0.66	0.73	0.78	0.82	0.85	0.86
-110	0.00	0.00	0.00	0.00	0.01	0.02	0.04	0.06	0.09	0.13	0.17	0.21	0.25	0.29	0.32	0.35	0.37	0.38	0.39
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.02	0.03	0.04	0.05	0.06	0.08	0.09	0.10	0.12	0.13	0.13
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.13	0.26	0.38	0.50	0.59	0.64	0.64	0.60	0.50	0.36	0.19	0.00
-70	0.00	0.00	0.00	0.04	0.47	1.19	2.19	3.39	4.54	5.45	6.09	6.38	6.36	6.12	5.62	4.84	3.82	2.59	1.20
-60	0.00	0.00	0.03	0.85	2.58	5.25	8.14	10.8	13.4	15.9	18.2	20.3	22.2	23.6	24.2	24.1	23.0	21.1	18.4
-50	0.00	0.00	0.42	2.52	6.53	11.3	16.3	21.8	27.9	34.6	41.5	47.8	53.0	56.6	58.4	58.4	56.4	52.5	47.1
-40	0.00	0.00	1.04	4.99	11.2	18.3	26.8	36.9	48.8	61.3	73.7	85.3	95.5	104	110	112	111	106	97.2
-30	0.00	0.01	1.80	7.66	15.9	26.0	38.8	54.7	72.9	92.6	113	134	155	174	190	202	208	206	194
-20	0.00	0.02	2.57	10.0	20.3	33.5	50.7	72.3	97.4	126	157	191	226	260	291	316	332	337	327
-10	0.00	0.03	3.14	11.8	23.7	39.4	60.4	86.8	119	156	198	244	293	339	381	417	444	459	458
0	0.00	0.03	3.39	12.7	25.5	42.8	65.9	95.5	132	175	225	279	335	389	436	472	498	511	517
10	0.00	0.11	3.46	12.5	24.9	41.1	62.4	89.1	121	159	202	249	298	346	390	427	456	474	476
20	0.00	0.17	3.17	11.4	22.7	36.9	54.7	76.8	102	132	165	200	236	272	306	333	353	362	357
30	0.00	0.22	2.61	9.47	19.2	30.8	44.9	61.5	80.4	101	123	146	168	190	208	223	231	232	224
40	0.00	0.24	1.96	7.04	14.9	24.0	34.4	46.0	58.9	72.3	85.7	98.8	111	121	129	135	136	134	127
50	0.00	0.25	1.35	4.57	10.2	17.0	24.3	32.1	40.3	48.5	56.7	64.0	70.4	75.5	79.0	80.8	80.8	79.0	75.6
60	0.00	0.23	0.85	2.66	5.76	10.2	15.2	20.4	25.5	30.5	35.3	39.6	43.4	46.5	48.8	50.3	51.0	50.9	50.2
70	0.00	0.18	0.64	1.42	2.85	4.85	7.37	10.3	13.5	16.5	19.5	22.2	24.7	26.9	28.7	30.2	31.4	32.3	32.8
80	0.00	0.12	0.38	0.79	1.34	2.03	2.85	3.89	5.04	6.27	7.58	8.90	10.2	11.5	12.7	13.8	14.9	15.8	16.6
90	0.00	0.04	0.09	0.13	0.17	0.22	0.26	0.30	0.35	0.39	0.44	0.48	0.52	0.57	0.61	0.65	0.70	0.74	0.78
100	0.00	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.04	0.05	0.05	0.06	0.05	0.04	0.03	0.02	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.09	0.13	0.16	0.18	0.19	0.19	0.19	0.17	0.17	0.17	0.15	0.11
130	0.00	0.00	0.00	0.00	0.01	0.08	0.16	0.22	0.29	0.35	0.44	0.50	0.60	0.65	0.69	0.71	0.72	0.67	0.61
140	0.00	0.00	0.00	0.00	0.07	0.18	0.28	0.39	0.55	0.70	0.87	1.03	1.19	1.32	1.42	1.52	1.54	1.55	1.49
150	0.00	0.00	0.00	0.02	0.14	0.27	0.43	0.64	0.86	1.10	1.37	1.63	1.88	2.12	2.35	2.51	2.63	2.66	2.61
160	0.00	0.00	0.00	0.04	0.20	0.37	0.58	0.85	1.15	1.50	1.84	2.22	2.59	2.94	3.26	3.52	3.72	3.82	3.79
170	0.00	0.00	0.00	0.07	0.24	0.44	0.72	1.03	1.40	1.81	2.24	2.70	3.14	3.57	3.97	4.35	4.65	4.85	4.88
180	0.00	0.00	0.00	0.08	0.26	0.49	0.80	1.13	1.55	2.01	2.48	2.97	3.43	3.90	4.34	4.77	5.15	5.43	5.55

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-02-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.25V I:1.184A P:13.42W PF:0.9252 Freq:49.99Hz Lamp Flux:685.783x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot light	WEIGHT:
SPEC.:15W 3000K 60°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:FLOOD-LIGHT SHROUD

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	5.50	5.28	4.97	4.63	4.26	3.86	3.44	2.99	2.53	2.04	1.60	1.21	0.82	0.54	0.27	0.11	0.00	0.00	
-170	5.31	5.09	4.81	4.49	4.11	3.71	3.27	2.83	2.38	1.93	1.51	1.14	0.78	0.51	0.26	0.10	0.00	0.00	
-160	4.66	4.52	4.27	3.98	3.66	3.29	2.91	2.50	2.12	1.72	1.33	1.02	0.70	0.45	0.25	0.06	0.00	0.00	
-150	3.70	3.60	3.43	3.22	2.96	2.66	2.36	2.04	1.71	1.39	1.11	0.82	0.59	0.37	0.18	0.03	0.00	0.00	
-140	2.61	2.55	2.45	2.33	2.14	1.95	1.73	1.50	1.26	1.05	0.83	0.63	0.44	0.27	0.14	0.02	0.00	0.00	
-130	1.60	1.59	1.55	1.47	1.38	1.26	1.14	1.00	0.85	0.70	0.57	0.43	0.30	0.17	0.08	0.00	0.00	0.00	
-120	0.88	0.87	0.86	0.83	0.77	0.72	0.65	0.58	0.51	0.42	0.33	0.25	0.16	0.11	0.02	0.00	0.00	0.00	
-110	0.40	0.40	0.39	0.38	0.36	0.33	0.30	0.26	0.23	0.18	0.14	0.11	0.04	0.01	0.00	0.00	0.00	0.00	
-100	0.13	0.13	0.12	0.10	0.09	0.07	0.06	0.04	0.03	0.02	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.15	0.30	0.41	0.49	0.51	0.51	0.46	0.39	0.30	0.22	0.13	0.04	0.01	0.00	0.00	0.00	0.00	0.00	
-70	2.56	3.77	4.76	5.52	6.00	6.20	6.17	5.82	5.10	4.10	2.92	1.80	0.93	0.38	0.06	0.00	0.00	0.00	
-60	21.1	23.0	24.0	24.2	23.5	22.1	20.2	18.0	15.6	13.2	10.5	7.69	4.67	2.12	0.67	0.05	0.00	0.00	
-50	52.7	56.7	58.8	58.9	57.0	53.2	47.9	41.4	34.5	27.7	21.5	16.0	10.9	5.90	2.05	0.36	0.00	0.00	
-40	107	112	114	111	105	97.0	86.4	74.4	61.5	48.6	36.7	26.4	18.0	10.7	4.32	0.81	0.00	0.00	
-30	207	211	206	194	178	158	137	115	93.9	73.4	54.6	38.5	25.7	15.5	6.97	1.43	0.02	0.00	
-20	340	337	323	299	268	233	196	161	128	98.7	72.5	50.5	33.1	19.9	9.41	2.08	0.04	0.00	
-10	463	451	428	394	351	303	253	204	160	121	87.5	60.2	39.0	23.3	11.2	2.58	0.05	0.00	
0	517	509	489	453	405	349	290	232	180	134	96.3	65.7	42.3	25.1	12.1	2.79	0.06	0.00	
10	477	464	439	403	358	308	257	208	163	123	89.8	62.2	40.7	24.5	11.9	2.90	0.14	0.00	
20	365	358	340	313	280	243	205	168	134	104	77.1	54.5	36.5	22.3	10.8	2.68	0.20	0.00	
30	233	234	226	212	194	172	148	125	102	80.9	61.4	44.6	30.5	18.8	8.79	2.24	0.23	0.00	
40	135	137	136	131	123	112	99.9	86.4	72.5	58.7	45.8	34.0	23.6	14.4	6.37	1.74	0.24	0.00	
50	79.2	81.1	81.3	79.5	75.9	70.7	64.1	56.6	48.4	40.0	31.8	24.0	16.5	9.53	4.10	1.29	0.25	0.00	
60	50.9	51.0	50.3	48.8	46.4	43.3	39.5	35.1	30.3	25.2	20.0	14.7	9.59	5.30	2.48	0.88	0.23	0.00	
70	32.2	31.4	30.1	28.6	26.7	24.5	22.0	19.2	16.2	13.0	9.86	6.98	4.59	2.77	1.44	0.64	0.18	0.00	
80	15.8	14.8	13.8	12.6	11.4	10.1	8.77	7.47	6.20	5.00	3.88	2.87	2.03	1.34	0.79	0.38	0.12	0.00	
90	0.74	0.70	0.65	0.61	0.57	0.52	0.48	0.44	0.39	0.35	0.30	0.26	0.22	0.17	0.13	0.09	0.04	0.00	
100	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00	
110	0.03	0.06	0.09	0.11	0.13	0.13	0.13	0.13	0.13	0.10	0.08	0.07	0.02	0.00	0.00	0.00	0.00	0.00	
120	0.18	0.22	0.24	0.27	0.30	0.32	0.33	0.33	0.32	0.28	0.23	0.18	0.11	0.08	0.01	0.00	0.00	0.00	
130	0.71	0.79	0.82	0.83	0.81	0.78	0.71	0.65	0.56	0.49	0.42	0.34	0.24	0.14	0.07	0.00	0.00	0.00	
140	1.59	1.63	1.65	1.59	1.52	1.43	1.29	1.14	0.97	0.82	0.65	0.52	0.38	0.24	0.12	0.01	0.00	0.00	
150	2.70	2.73	2.65	2.53	2.36	2.17	1.95	1.71	1.43	1.18	0.95	0.71	0.52	0.34	0.16	0.02	0.00	0.00	
160	3.86	3.82	3.67	3.46	3.21	2.90	2.59	2.23	1.91	1.56	1.21	0.92	0.64	0.42	0.23	0.06	0.00	0.00	
170	4.89	4.74	4.51	4.21	3.86	3.50	3.09	2.69	2.27	1.85	1.44	1.09	0.75	0.50	0.26	0.10	0.00	0.00	
180	5.50	5.28	4.97	4.63	4.26	3.86	3.44	2.99	2.53	2.04	1.60	1.21	0.82	0.54	0.27	0.11	0.00	0.00	

H(β) Range:-90 - 90DEG

H(β) Interval: 0.5DEG

Test Speed: HIGH

Temperature:25.3DEG

Operators:ADMIN

Test Date:2023-02-18

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352

Humidity:65.0%

Test Distance:13.563m [K=1.0000]

Remarks: