

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		2762.3 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	60.9V x 61.3H
	At 50% of Imax	30.8V x 30.5H
	At 90% of Imax	11.0V x 10.7H
Beam Flux	Total	1000.4 lumens per klm.
	To 10% of Imax	874.7 lumens per klm.
	To 50% of Imax	434.6 lumens per klm.
	To 90% of Imax	65.3 lumens per klm.
	Upward LOR	0.6 %
	Downward LOR	99.5 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-15

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.15V I:0.3505A P:2.632W PF:0.6181 Freq:59.98Hz Lamp Flux:62.7403x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Nano Knuckle WW	WEIGHT:
SPEC.:3W 2700K 30°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-106

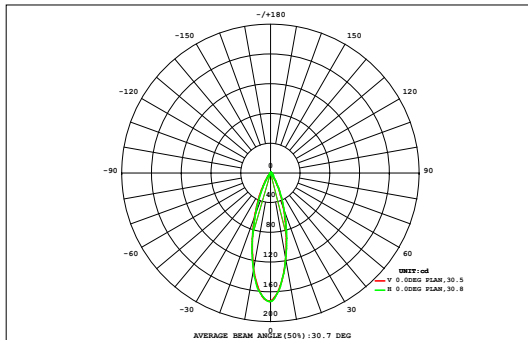

DATA OF LAMP		Eff:23.83lm/W	
MODEL	N7B3-3W-30-A	Imax (cd)	173.3
NOMINAL POWER (W)	3	AVAILABILITY (%)	87.5
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	54.90
NOMINAL FLUX (lm)	62.7403	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	62.74
TEST VOLTAGE (V)	12	θ @50% (H,V)	31,31DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.00	0.01	0.01	0.02	0.02	0.02	0.03	0.03	0.02	0.02	0.02	0.01	0.01	0.00	0.00	0.00	0.22	0.00
45	0.00	0.00	0.01	0.01	0.02	0.03	0.04	0.05	0.05	0.05	0.05	0.04	0.03	0.02	0.01	0.01	0.01	0.00	0.44	0.00
40	0.00	0.01	0.01	0.02	0.04	0.06	0.08	0.09	0.10	0.10	0.09	0.07	0.06	0.04	0.02	0.01	0.01	0.00	0.84	0.03
35	0.01	0.01	0.02	0.04	0.07	0.11	0.15	0.18	0.19	0.19	0.17	0.14	0.10	0.07	0.04	0.02	0.01	0.01	1.52	0.95
30	0.01	0.02	0.04	0.07	0.12	0.18	0.25	0.30	0.33	0.33	0.29	0.23	0.16	0.11	0.06	0.03	0.02	0.01	2.54	2.15
25	0.01	0.02	0.05	0.10	0.18	0.28	0.38	0.47	0.52	0.51	0.45	0.35	0.25	0.16	0.09	0.05	0.02	0.01	3.91	3.58
20	0.01	0.03	0.07	0.14	0.24	0.38	0.54	0.68	0.76	0.75	0.65	0.49	0.34	0.21	0.12	0.06	0.03	0.01	5.53	5.24
15	0.02	0.04	0.09	0.17	0.30	0.49	0.70	0.90	1.02	1.00	0.85	0.63	0.42	0.26	0.14	0.07	0.03	0.02	7.16	6.89
10	0.02	0.04	0.10	0.19	0.34	0.55	0.81	1.07	1.23	1.21	1.00	0.72	0.47	0.29	0.16	0.08	0.04	0.02	8.33	8.07
5	0.02	0.04	0.09	0.19	0.35	0.56	0.82	1.09	1.26	1.23	1.02	0.73	0.48	0.29	0.16	0.08	0.04	0.02	8.46	8.20
0	0.01	0.04	0.08	0.17	0.31	0.50	0.73	0.96	1.11	1.09	0.91	0.66	0.43	0.26	0.14	0.07	0.03	0.02	7.53	7.26
-5	0.01	0.03	0.07	0.14	0.25	0.40	0.57	0.74	0.85	0.84	0.71	0.52	0.35	0.21	0.12	0.06	0.03	0.01	5.91	5.63
-10	0.01	0.02	0.05	0.10	0.18	0.28	0.40	0.51	0.58	0.57	0.49	0.37	0.25	0.16	0.09	0.04	0.02	0.01	4.13	3.80
-15	0.01	0.02	0.03	0.06	0.11	0.18	0.25	0.31	0.35	0.35	0.30	0.23	0.16	0.10	0.06	0.03	0.02	0.01	2.59	2.20
-20	0.01	0.01	0.02	0.04	0.07	0.10	0.14	0.17	0.19	0.19	0.17	0.13	0.09	0.06	0.04	0.02	0.01	0.01	1.47	0.91
-25	0.00	0.01	0.01	0.02	0.03	0.05	0.07	0.09	0.09	0.09	0.08	0.07	0.05	0.03	0.02	0.01	0.01	0.00	0.75	0.00
-30	0.00	0.00	0.01	0.01	0.02	0.02	0.03	0.04	0.04	0.04	0.04	0.03	0.02	0.02	0.01	0.01	0.00	0.00	0.35	0.00
-35	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.16	0.00
-40	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00
-45	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00
	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)	10	15	20	25	30	35	40	45			
Φ t	0.15	0.35	0.76	1.50	2.65	4.19	6.00	7.71	8.74	8.58	7.29	5.46	3.70	2.30	1.30	0.68	0.33	0.16	62	---
Φ a	0.00	0.00	0.07	1.01	2.26	3.84	5.67	7.39	8.43	8.26	6.96	5.11	3.32	1.86	0.71	0.00	0.00	0.00	---	55

one-half-peak spread: U:15.9,D:15.2 , L:16.4,R:14.3


NEMA Beam Type: Type 4

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-15

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.15V I:0.3505A P:2.632W PF:0.6181 Freq:59.98Hz Lamp Flux:62.7403x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Nano Knuckle WW	WEIGHT:
SPEC.:3W 2700K 30°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-106

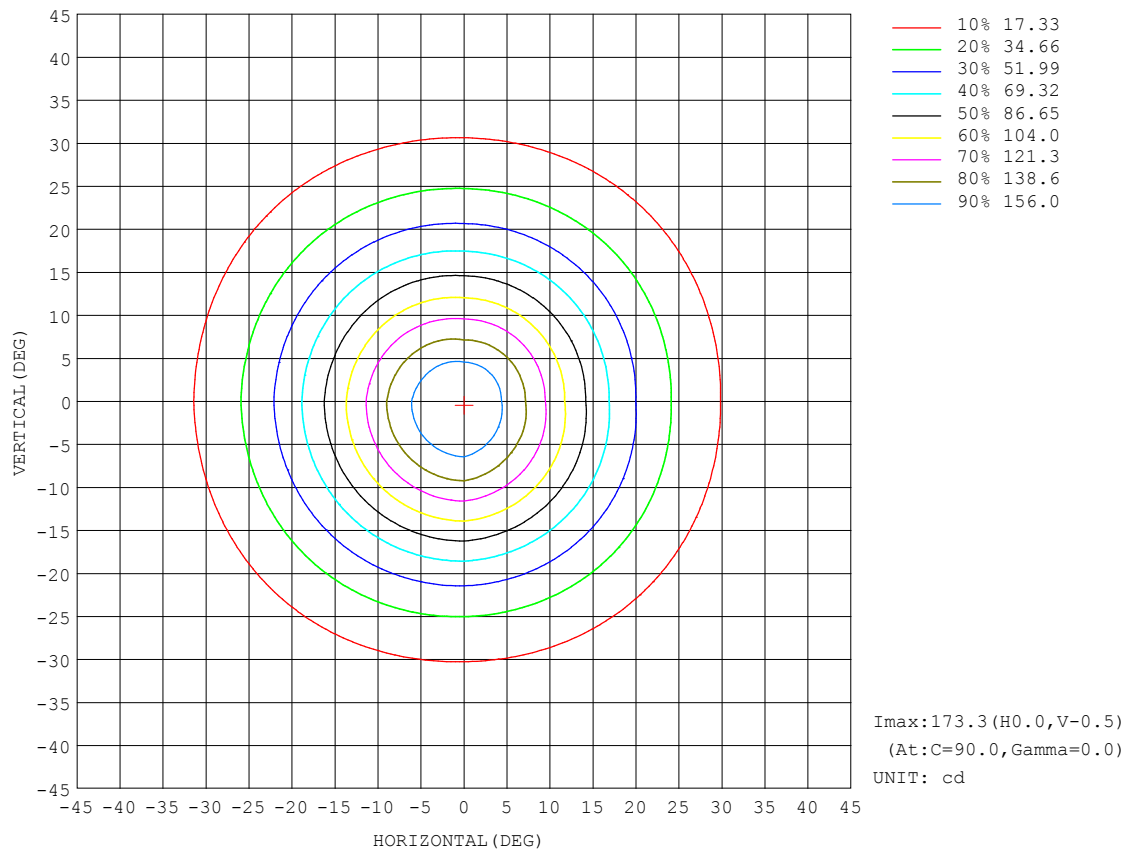


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-15

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.15V I:0.3505A P:2.632W PF:0.6181 Freq:59.98Hz Lamp Flux:62.7403x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Nano Knuckle WW	WEIGHT:
SPEC.:3W 2700K 30°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-106

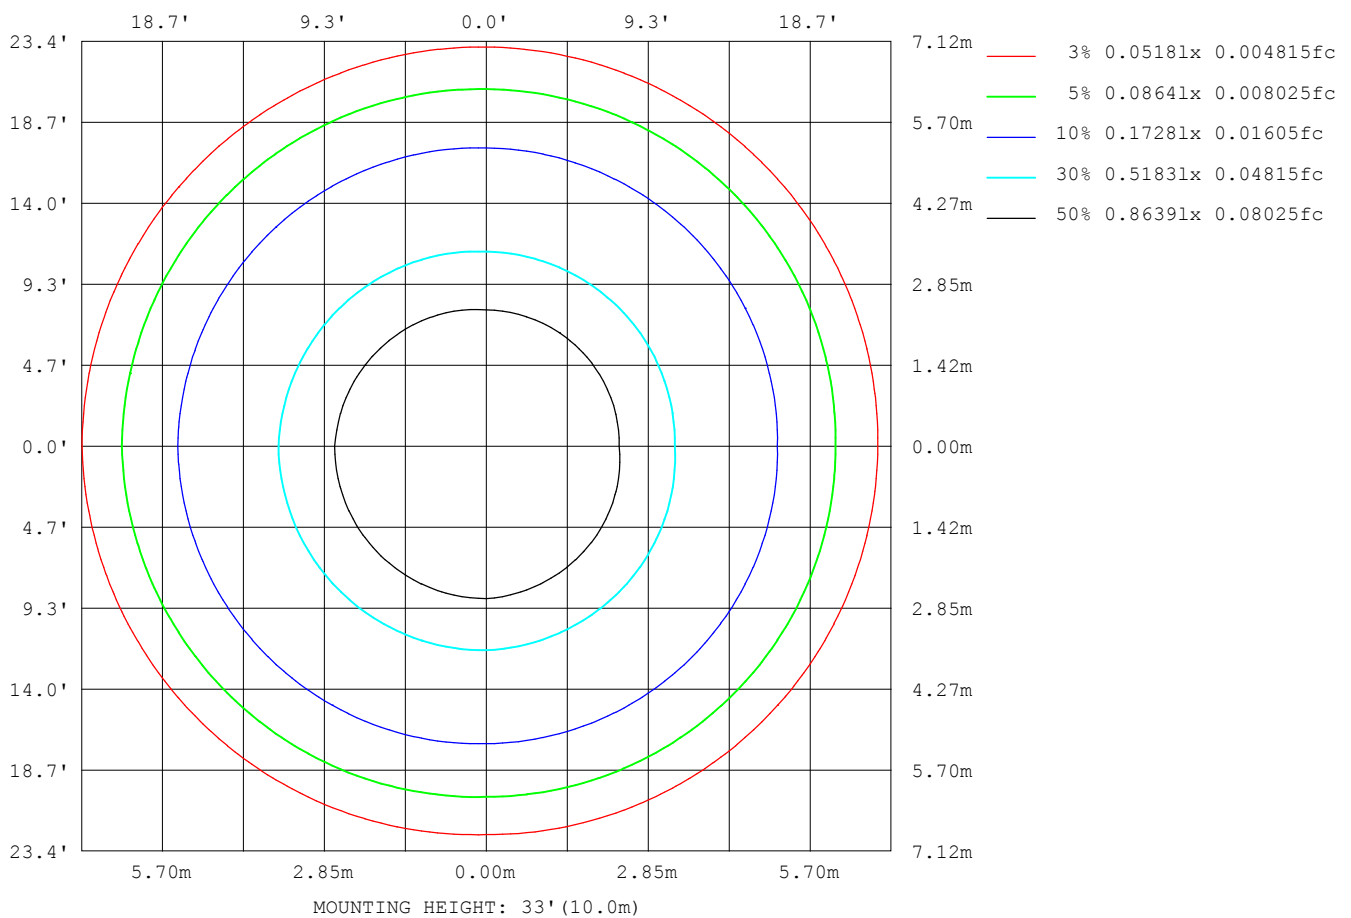

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-15

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

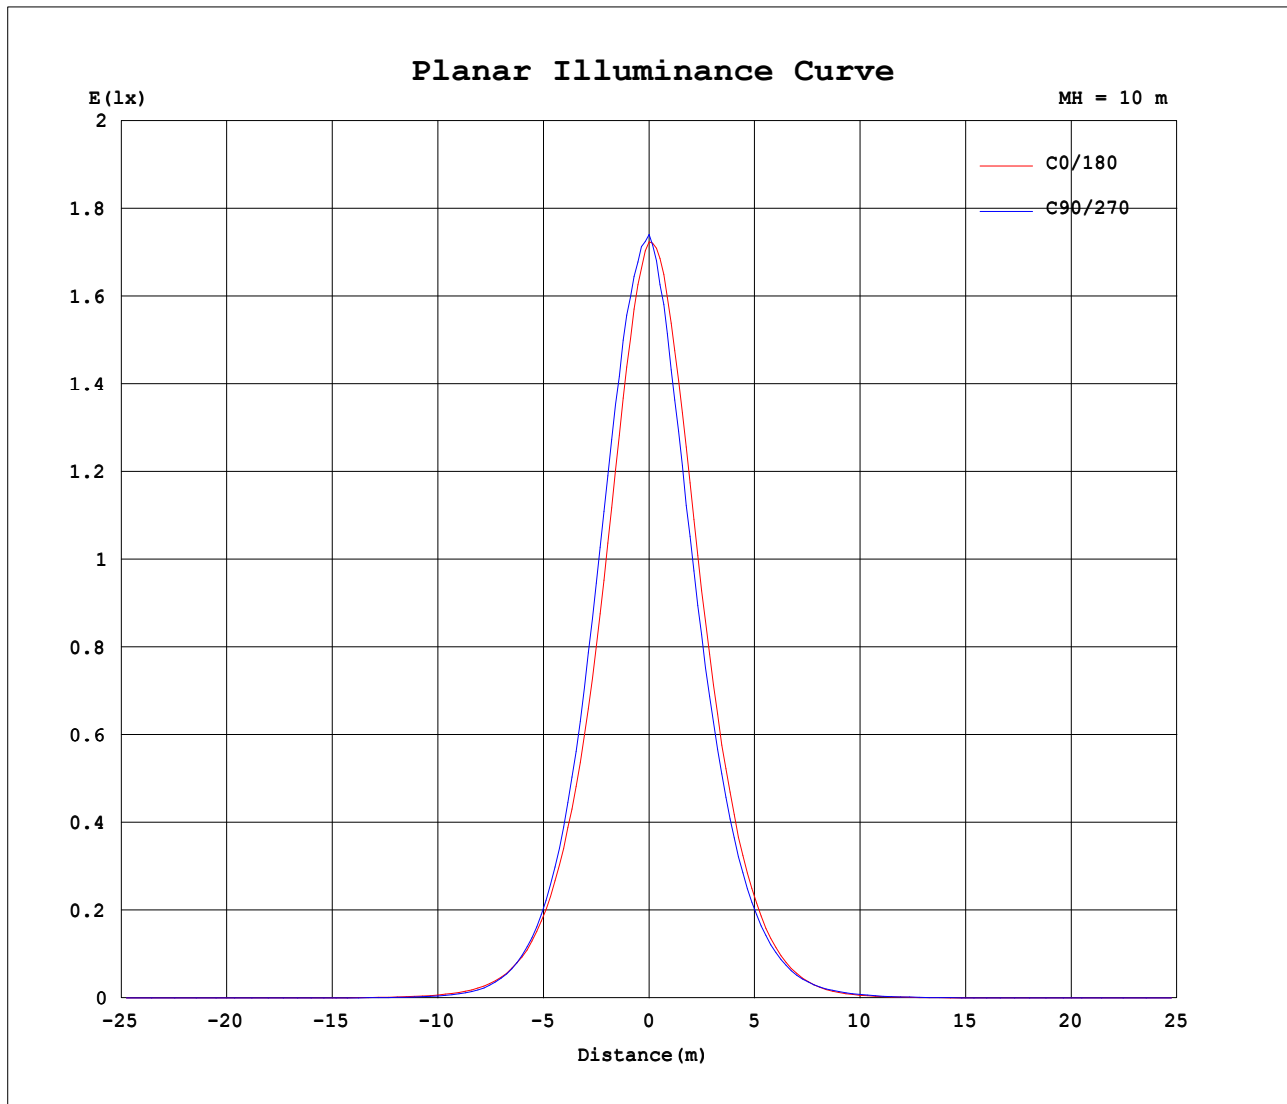


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-15

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.15V I:0.3505A P:2.632W PF:0.6181 Freq:59.98Hz Lamp Flux:62.7403x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Nano Knuckle WW	WEIGHT:
SPEC.:3W 2700K 30°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-106

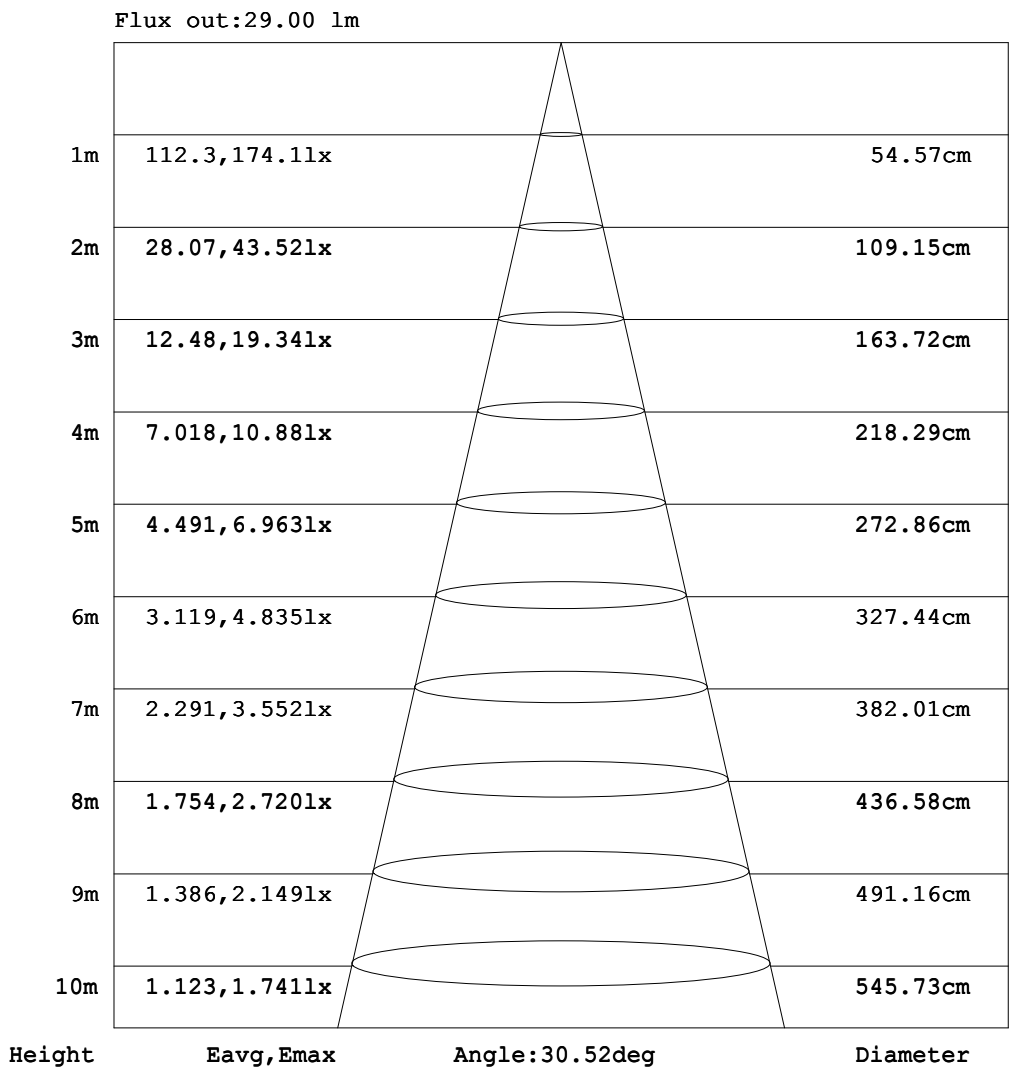

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-15

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.15V I:0.3505A P:2.632W PF:0.6181 Freq:59.98Hz Lamp Flux:62.7403x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Nano Knuckle WW	WEIGHT:
SPEC.:3W 2700K 30°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-106

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.21	0.33	0.46	0.54	0.60	0.62
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.06	0.20	0.33	0.44	0.53	0.59	0.62
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.09	0.22	0.32	0.41	0.46	0.50
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.06	0.12	0.17	0.23	0.26
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.08	0.13	0.14	0.14	0.15	0.15	0.15
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.13	0.15	0.19	0.28	0.35	0.46	0.56	0.63	0.67	0.67
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.15	0.24	0.39	0.65	0.94	1.34	1.85	2.40	2.91	3.27	3.32
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.15	0.29	0.54	0.99	1.73	3.03	5.16	8.30	11.7	15.0	17.4	18.0
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.14	0.24	0.49	1.03	2.08	4.31	8.78	15.8	25.5	37.1	48.6	57.6	60.7
-10	0.00	0.00	0.00	0.00	0.00	0.02	0.15	0.31	0.75	1.56	3.51	8.11	16.7	30.5	50.1	74.8	102	124	133
0	0.00	0.00	0.00	0.00	0.00	0.04	0.15	0.32	0.85	1.84	4.35	10.2	21.0	38.3	63.0	95.4	132	162	172
10	0.00	0.00	0.00	0.00	0.00	0.02	0.15	0.31	0.78	1.65	3.68	8.31	16.9	30.4	49.2	72.1	95.5	114	118
20	0.00	0.00	0.00	0.00	0.00	0.00	0.13	0.25	0.51	1.14	2.33	4.71	9.21	16.2	25.6	36.3	46.5	53.5	55.2
30	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.15	0.30	0.60	1.16	2.09	3.62	5.94	9.06	12.6	15.9	18.1	18.7
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.14	0.26	0.46	0.78	1.22	1.80	2.52	3.31	4.01	4.49	4.67
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.09	0.13	0.21	0.31	0.44	0.58	0.76	0.90	0.99	1.03
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.06	0.09	0.10	0.12	0.13	0.13
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.04
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.14	0.21	0.28	0.31	0.33
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.15	0.28	0.38	0.46	0.49	0.54
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.21	0.33	0.46	0.54	0.60	0.62

H(β) Range:-90 - 90DEG
 H(β) Interval: 0.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:ADMIN
 Test Date:2023-08-15

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
 Humidity:65.0%
 Test Distance:13.563m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.15V I:0.3505A P:2.632W PF:0.6181 Freq:59.98Hz Lamp Flux:62.7403x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Nano Knuckle WW	WEIGHT:
SPEC.:3W 2700K 30°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-106

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	0.60	0.60	0.58	0.46	0.43	0.29	0.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-170	0.62	0.60	0.54	0.46	0.34	0.22	0.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-160	0.49	0.46	0.42	0.31	0.21	0.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-150	0.25	0.22	0.17	0.11	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.15	0.14	0.13	0.12	0.11	0.07	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	0.67	0.64	0.57	0.47	0.36	0.28	0.18	0.13	0.08	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-40	3.25	2.90	2.43	1.90	1.41	1.00	0.67	0.39	0.22	0.13	0.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-30	17.0	14.4	11.0	7.76	4.95	3.04	1.84	1.07	0.58	0.28	0.13	0.05	0.00	0.00	0.00	0.00	0.00	0.00	
-20	55.9	45.8	34.1	22.8	14.0	7.89	4.15	2.20	1.13	0.53	0.22	0.08	0.00	0.00	0.00	0.00	0.00	0.00	
-10	120	94.8	66.6	43.4	25.9	14.2	7.18	3.49	1.71	0.79	0.32	0.12	0.03	0.00	0.00	0.00	0.00	0.00	
0	152	117	80.9	51.9	31.1	16.9	8.70	4.19	2.02	0.92	0.36	0.13	0.04	0.00	0.00	0.00	0.00	0.00	
10	110	88.4	63.9	42.6	25.9	14.4	7.39	3.67	1.80	0.82	0.32	0.12	0.03	0.00	0.00	0.00	0.00	0.00	
20	51.8	43.7	33.2	23.0	14.4	8.32	4.55	2.44	1.24	0.56	0.23	0.08	0.00	0.00	0.00	0.00	0.00	0.00	
30	17.7	15.2	11.9	8.53	5.72	3.63	2.19	1.25	0.64	0.29	0.13	0.04	0.00	0.00	0.00	0.00	0.00	0.00	
40	4.48	4.00	3.34	2.57	1.86	1.28	0.80	0.45	0.24	0.12	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
50	1.00	0.91	0.77	0.59	0.45	0.31	0.20	0.12	0.05	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
60	0.13	0.12	0.09	0.07	0.04	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
150	0.05	0.05	0.05	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
160	0.34	0.34	0.30	0.23	0.13	0.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
170	0.51	0.52	0.48	0.41	0.30	0.18	0.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
180	0.60	0.60	0.58	0.46	0.43	0.29	0.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG

H(β) Interval: 0.5DEG

Test Speed: HIGH

Temperature:25.3DEG

Operators:ADMIN

Test Date:2023-08-15

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352

Humidity:65.0%

Test Distance:13.563m [K=1.0000]

Remarks: