

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	363.3 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	159.1V x 156.2H
	At 50% of Imax	110.5V x 109.2H
	At 90% of Imax	46.6V x 48.3H

Beam Flux	Total	1000.0 lumens per klm.
	To 10% of Imax	982.1 lumens per klm.
	To 50% of Imax	728.1 lumens per klm.
	To 90% of Imax	181.5 lumens per klm.

Upward LOR	0.4 %
Downward LOR	99.6 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-23

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.14V I:0.3498A P:2.705W PF:0.6369 Freq:59.98Hz Lamp Flux:133.876x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper alloy Wall Light WEIGHT:	
SPEC.:2.5W 2700K Opalescent glass	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

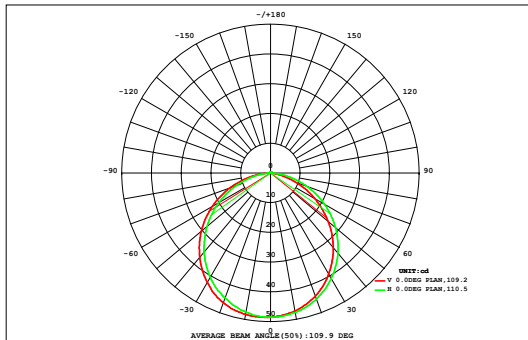

DATA OF LAMP		Eff:49.50lm/W	
MODEL	W4B4-2.5W-27K-A	Imax(cd)	48.63
NOMINAL POWER(W)	2.5	AVAILABILITY(%)	98.2
RATED VOLTAGE(V)	12	Avai. FLUX(lm)	131.4
NOMINAL FLUX(lm)	133.876	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	133.9
TEST VOLTAGE(V)	12	θ @50%(H,V)	109,110DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.01	0.01	0.02	0.04	0.05	0.05	0.06	0.05	0.04	0.03	0.02	0.01	0.00	0.00	0.00	0.00	0.40	0.00
90	0.00	0.01	0.04	0.08	0.13	0.18	0.22	0.25	0.27	0.26	0.23	0.18	0.13	0.07	0.03	0.01	0.00	0.00	2.07	1.74
80	0.00	0.02	0.08	0.15	0.25	0.34	0.42	0.48	0.51	0.50	0.45	0.38	0.28	0.19	0.10	0.03	0.00	0.00	4.20	4.10
70	0.00	0.04	0.12	0.23	0.37	0.50	0.62	0.71	0.75	0.74	0.68	0.57	0.44	0.30	0.17	0.07	0.01	0.00	6.30	6.25
60	0.01	0.05	0.15	0.30	0.47	0.65	0.80	0.91	0.97	0.96	0.88	0.75	0.58	0.40	0.23	0.10	0.02	0.00	8.23	8.20
50	0.01	0.06	0.19	0.36	0.57	0.77	0.96	1.09	1.16	1.14	1.06	0.90	0.71	0.49	0.29	0.13	0.03	0.00	9.91	9.88
40	0.01	0.07	0.21	0.41	0.64	0.87	1.08	1.23	1.31	1.29	1.20	1.03	0.80	0.56	0.33	0.15	0.03	0.00	11.2	11.2
30	0.01	0.08	0.23	0.45	0.69	0.95	1.17	1.33	1.41	1.40	1.29	1.11	0.87	0.61	0.36	0.16	0.04	0.00	12.2	12.1
20	0.01	0.08	0.24	0.46	0.72	0.99	1.22	1.38	1.46	1.45	1.34	1.15	0.90	0.63	0.37	0.17	0.04	0.00	12.6	12.6
10	0.01	0.08	0.24	0.46	0.72	0.99	1.22	1.38	1.46	1.45	1.34	1.15	0.90	0.63	0.37	0.17	0.04	0.00	12.6	12.6
0	0.01	0.08	0.23	0.44	0.69	0.94	1.17	1.33	1.40	1.39	1.29	1.11	0.87	0.61	0.36	0.16	0.04	0.00	12.1	12.1
-10	0.01	0.07	0.21	0.41	0.64	0.87	1.08	1.23	1.30	1.29	1.19	1.02	0.80	0.56	0.33	0.15	0.03	0.00	11.2	11.2
-20	0.01	0.06	0.18	0.36	0.56	0.77	0.95	1.08	1.14	1.13	1.05	0.90	0.70	0.48	0.29	0.13	0.03	0.00	9.81	9.79
-30	0.00	0.05	0.15	0.30	0.47	0.64	0.79	0.90	0.95	0.94	0.87	0.74	0.57	0.40	0.23	0.10	0.02	0.00	8.11	8.08
-40	0.00	0.04	0.11	0.23	0.36	0.49	0.61	0.69	0.73	0.72	0.66	0.56	0.43	0.29	0.16	0.06	0.01	0.00	6.16	6.11
-50	0.00	0.02	0.07	0.15	0.24	0.33	0.41	0.47	0.49	0.48	0.44	0.36	0.27	0.18	0.09	0.03	0.00	0.00	4.04	3.94
-60	0.00	0.01	0.04	0.07	0.12	0.17	0.21	0.23	0.25	0.24	0.21	0.17	0.12	0.07	0.03	0.01	0.00	0.00	1.93	1.53
-70	0.00	0.00	0.01	0.01	0.02	0.03	0.04	0.04	0.04	0.04	0.03	0.02	0.01	0.01	0.00	0.00	0.00	0.00	0.32	0.00
-80	0.00	0.00	0.01	0.01	0.02	0.03	0.04	0.04	0.04	0.04	0.03	0.02	0.01	0.01	0.00	0.00	0.00	0.00	0.32	0.00
-90	0.00	0.00	0.01	0.01	0.02	0.03	0.04	0.04	0.04	0.04	0.03	0.02	0.01	0.01	0.00	0.00	0.00	0.00	0.32	0.00
HORIZONTAL (DEG)																				
Φ t	0.08	0.84	2.51	4.90	7.68	10.5	13.0	14.8	15.6	15.5	14.2	12.1	9.40	6.47	3.75	1.63	0.35	0.01	133	---
Φ a	0.01	0.73	2.40	4.79	7.58	10.4	12.9	14.7	15.5	15.3	14.1	12.0	9.28	6.35	3.63	1.50	0.19	0.00	---	131

one-half-peak spread: U:53.1,D:53.0 , L:52.4,R:53.5


NEMA Beam Type: Type 7

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-23

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.14V I:0.3498A P:2.705W PF:0.6369 Freq:59.98Hz Lamp Flux:133.876x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper alloy Wall Light WEIGHT:	
SPEC.:2.5W 2700K Opalescent glass	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

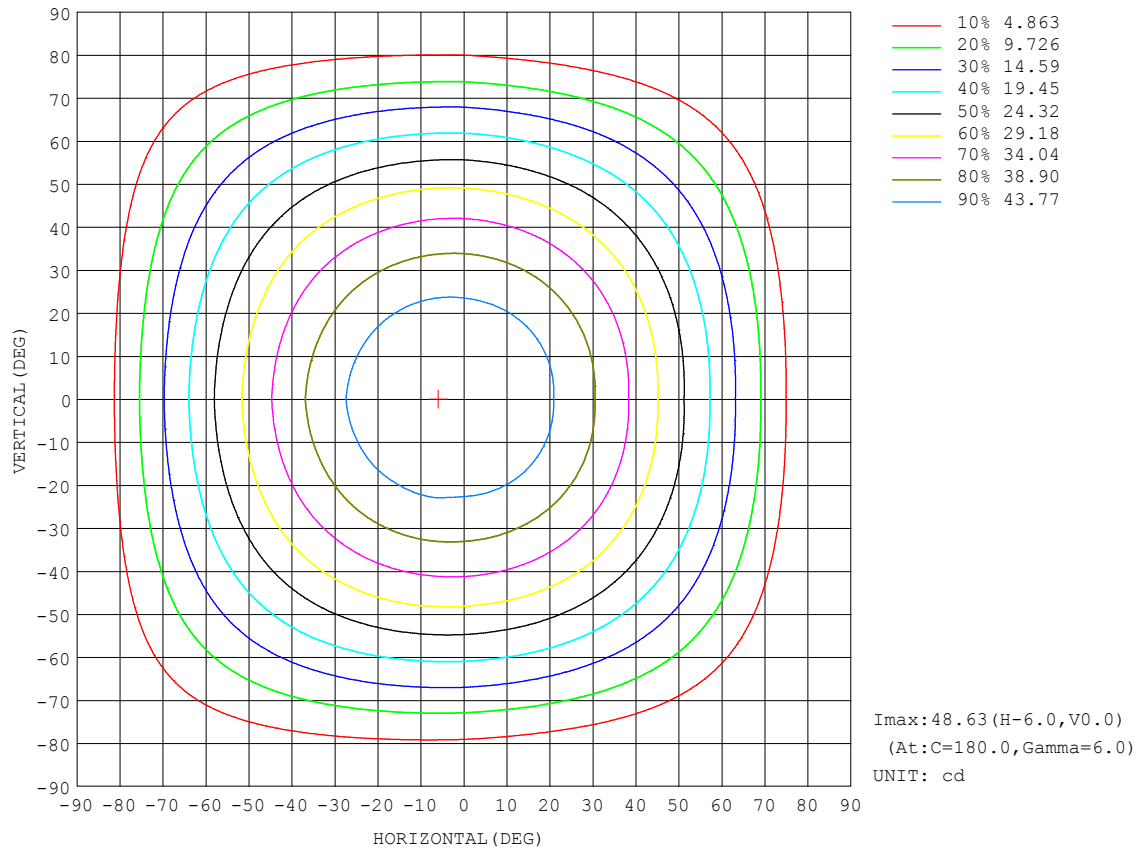


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-23

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.14V I:0.3498A P:2.705W PF:0.6369 Freq:59.98Hz Lamp Flux:133.876x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper alloy Wall Light WEIGHT:	
SPEC.:2.5W 2700K Opalescent glass	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

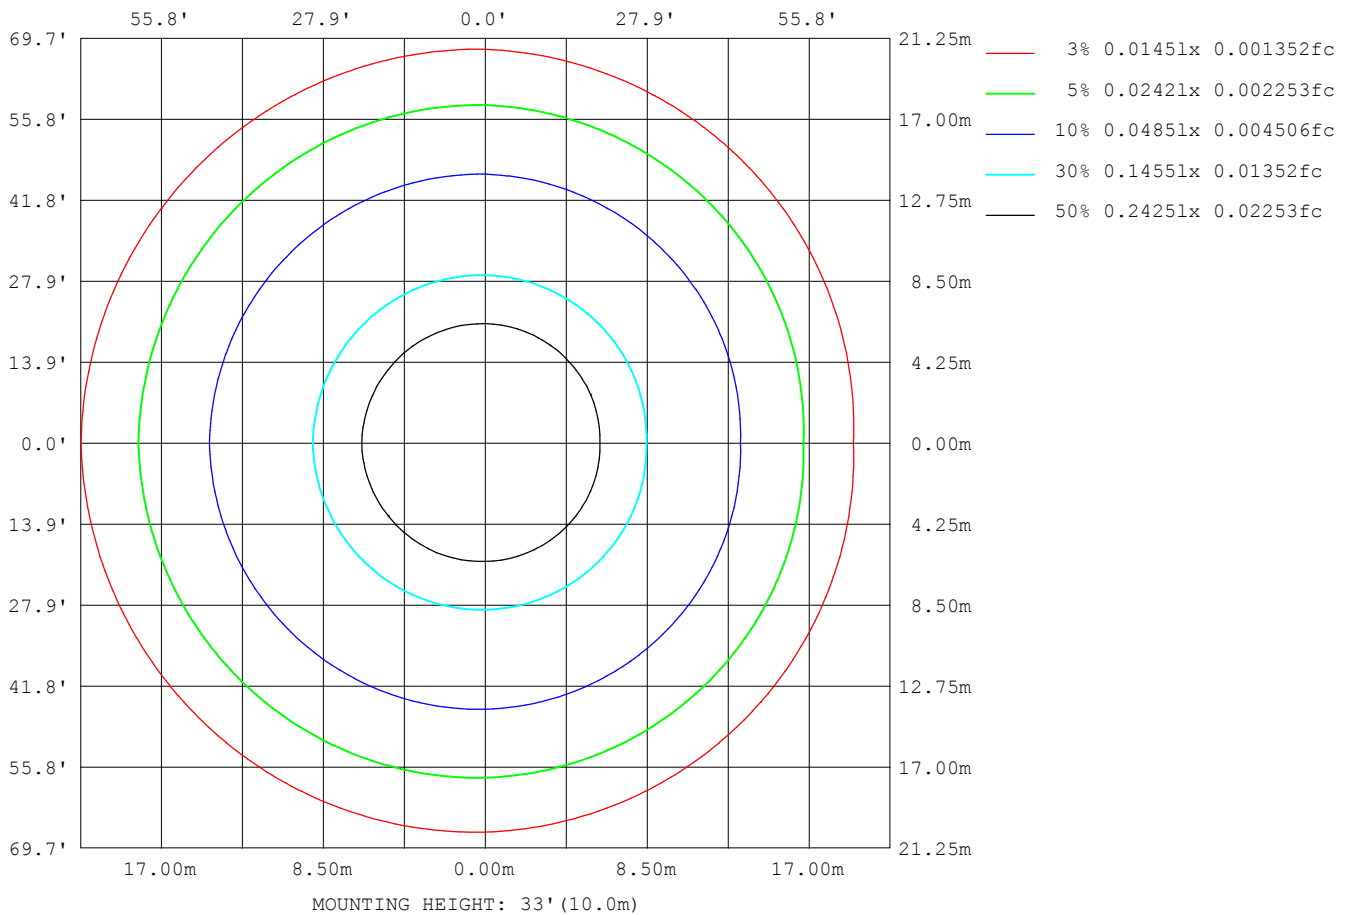

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-23

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

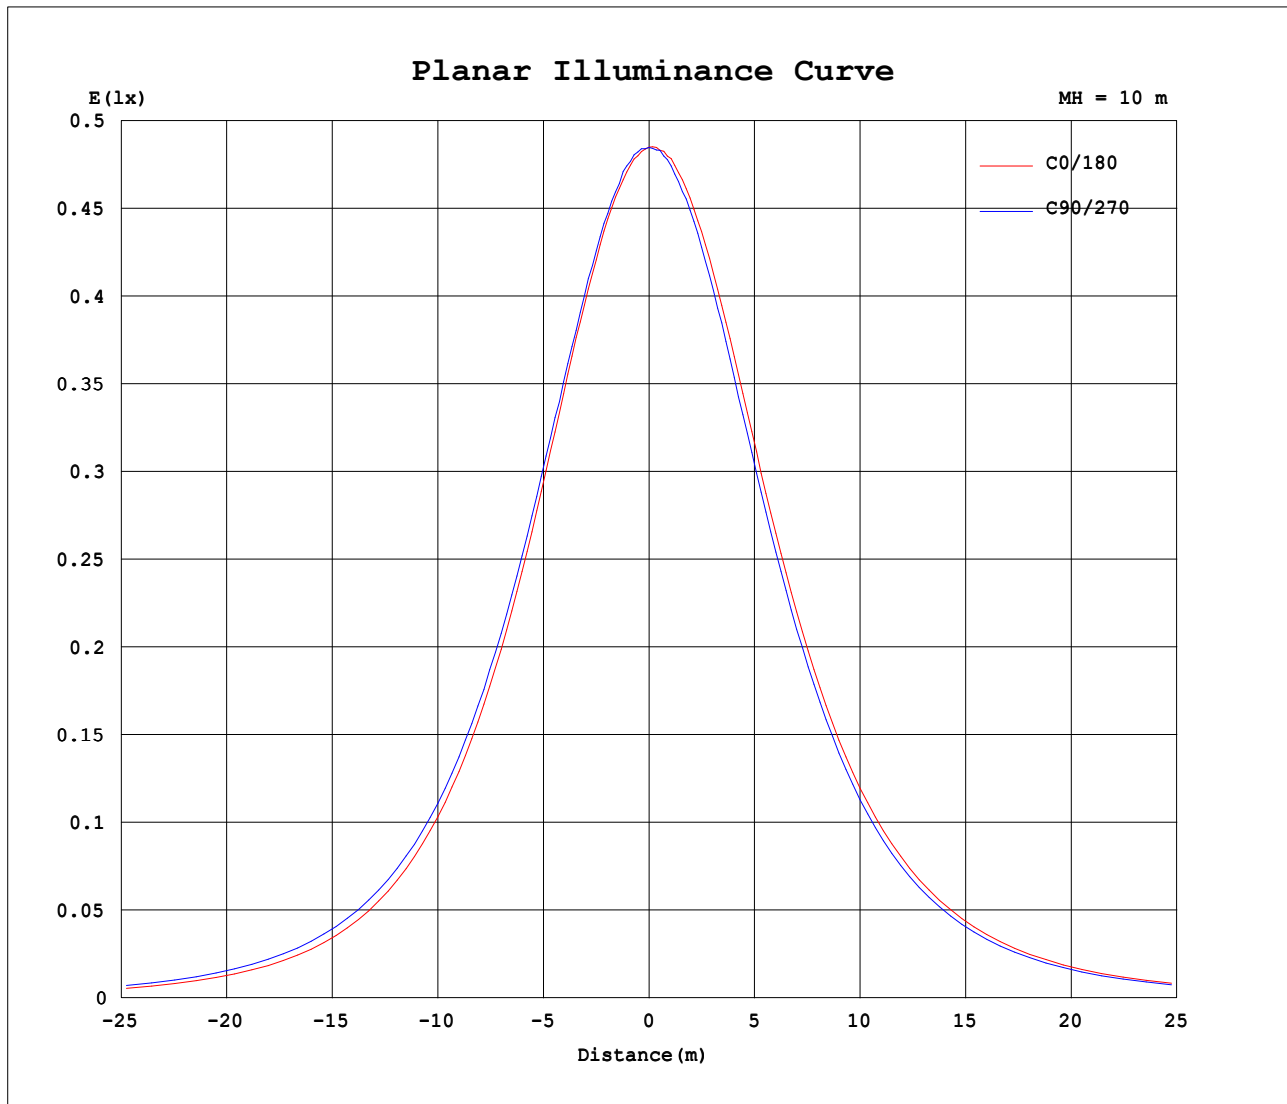


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-23

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.14V I:0.3498A P:2.705W PF:0.6369 Freq:59.98Hz Lamp Flux:133.876x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper alloy Wall Light	WEIGHT:
SPEC.:2.5W 2700K Opalescent glass	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Flux out:97.18 lm

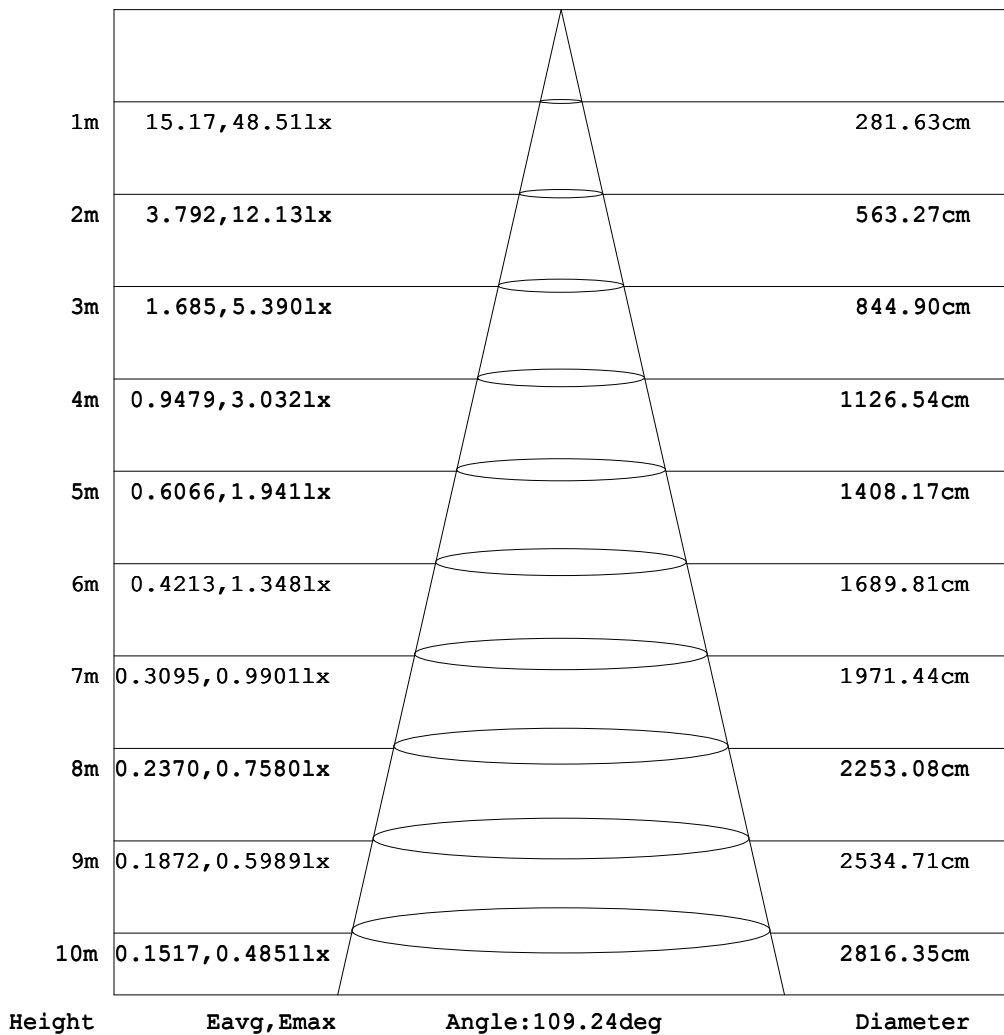

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-23

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.14V I:0.3498A P:2.705W PF:0.6369 Freq:59.98Hz Lamp Flux:133.876x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper alloy Wall Light WEIGHT:	
SPEC.:2.5W 2700K Opalescent glass	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.08	0.12	0.16	0.19	0.24	0.26	0.29	0.31	0.31	0.31
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.08	0.13	0.16	0.19	0.22	0.26	0.29	0.30	0.31	0.31
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.03	0.08	0.11	0.15	0.18	0.21	0.24	0.27	0.28	0.30	0.31
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.05	0.09	0.12	0.15	0.17	0.20	0.23	0.24	0.26	0.27
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.03	0.04	0.08	0.11	0.13	0.15	0.17	0.19	0.21	0.22
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.03	0.04	0.06	0.07	0.10	0.11	0.12	0.13	0.14
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.03	0.04	0.05	0.05	0.06	0.07
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.16	0.47	0.86	1.29	1.72	2.14	2.54	2.91	3.25	3.55	3.80	4.00	4.15	4.24	4.28	4.26	4.19
-70	0.00	0.17	0.93	1.96	3.04	4.17	5.27	6.32	7.34	8.31	9.16	9.93	10.6	11.2	11.6	11.9	12.1	12.1	12.1
-60	0.00	0.48	1.95	3.66	5.48	7.28	9.08	10.8	12.4	13.9	15.3	16.5	17.6	18.5	19.3	19.8	20.2	20.3	20.3
-50	0.00	0.85	2.97	5.38	7.83	10.3	12.7	15.0	17.2	19.3	21.2	22.8	24.3	25.5	26.5	27.2	27.7	27.9	27.9
-40	0.00	1.23	3.93	6.91	9.97	13.0	16.0	18.8	21.5	24.0	26.3	28.4	30.2	31.7	33.0	33.9	34.6	34.8	34.8
-30	0.00	1.56	4.76	8.21	11.8	15.3	18.7	22.0	25.1	28.0	30.7	33.0	35.2	36.9	38.4	39.5	40.2	40.6	40.5
-20	0.00	1.83	5.38	9.23	13.1	17.0	20.9	24.4	27.9	31.0	34.0	36.6	39.0	40.9	42.5	43.8	44.5	44.8	44.7
-10	0.00	1.99	5.78	9.86	14.0	18.1	22.2	26.0	29.6	33.0	36.1	38.9	41.4	43.6	45.3	46.4	47.2	47.5	47.5
0	0.00	2.06	5.94	10.1	14.4	18.6	22.8	26.7	30.4	33.8	37.1	40.0	42.6	44.8	46.4	47.6	48.3	48.5	48.5
10	0.00	2.00	5.79	9.88	14.0	18.2	22.2	26.1	29.7	33.1	36.2	39.0	41.5	43.7	45.4	46.5	47.3	47.7	47.7
20	0.00	1.84	5.40	9.27	13.2	17.1	20.9	24.5	28.0	31.2	34.1	36.8	39.1	41.1	42.7	44.0	44.7	45.1	45.1
30	0.00	1.58	4.79	8.27	11.8	15.4	18.8	22.2	25.3	28.2	30.9	33.2	35.4	37.2	38.7	39.8	40.5	40.9	40.9
40	0.00	1.24	3.97	6.98	10.1	13.1	16.1	19.0	21.8	24.3	26.6	28.7	30.5	32.1	33.4	34.3	35.0	35.3	35.3
50	0.00	0.86	3.02	5.46	7.95	10.4	12.9	15.3	17.5	19.6	21.5	23.2	24.7	26.0	27.0	27.7	28.2	28.5	28.5
60	0.00	0.49	1.99	3.74	5.60	7.45	9.27	11.0	12.7	14.3	15.7	17.0	18.1	19.0	19.8	20.4	20.8	20.9	20.9
70	0.00	0.18	0.97	2.03	3.15	4.32	5.47	6.57	7.63	8.62	9.51	10.3	11.1	11.7	12.2	12.5	12.8	12.9	12.8
80	0.00	0.00	0.18	0.52	0.94	1.40	1.87	2.33	2.77	3.17	3.56	3.90	4.18	4.42	4.62	4.76	4.85	4.87	4.84
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.03
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.05	0.07	0.11	0.11	0.13	0.13	0.13
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.05	0.09	0.12	0.14	0.15	0.15	0.15	0.16	0.16
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.05	0.09	0.13	0.15	0.16	0.19	0.21	0.24	0.26	0.27
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.07	0.12	0.15	0.17	0.20	0.24	0.28	0.29	0.30	0.30
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.08	0.12	0.16	0.19	0.24	0.26	0.29	0.31	0.31	0.30

H(β) Range:-90 - 90DEG
 H(β) Interval: 0.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:ADMIN
 Test Date:2025-07-23

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
 Humidity:65.0%
 Test Distance:13.563m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.14V I:0.3498A P:2.705W PF:0.6369 Freq:59.98Hz Lamp Flux:133.876x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper alloy Wall Light WEIGHT:	
SPEC.:2.5W 2700K Opalescent glass	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	0.31	0.31	0.31	0.30	0.28	0.25	0.20	0.15	0.15	0.14	0.12	0.03	0.00	0.00	0.00	0.00	0.00	0.00	
-170	0.31	0.31	0.31	0.30	0.28	0.25	0.19	0.16	0.16	0.14	0.11	0.03	0.00	0.00	0.00	0.00	0.00	0.00	
-160	0.30	0.30	0.28	0.28	0.25	0.20	0.17	0.16	0.15	0.14	0.08	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
-150	0.27	0.26	0.25	0.21	0.19	0.18	0.16	0.15	0.14	0.10	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-140	0.21	0.20	0.19	0.17	0.16	0.15	0.14	0.12	0.09	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-130	0.14	0.14	0.13	0.14	0.11	0.10	0.07	0.04	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.06	0.06	0.05	0.04	0.03	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	3.99	3.74	3.44	3.10	2.72	2.32	1.90	1.50	1.12	0.82	0.56	0.35	0.20	0.09	0.02	0.00	0.00	0.00	
-70	11.8	11.5	11.0	10.3	9.56	8.70	7.74	6.69	5.56	4.37	3.18	2.01	1.04	0.43	0.18	0.04	0.00	0.00	
-60	20.0	19.4	18.7	17.8	16.8	15.6	14.2	12.6	10.9	9.15	7.26	5.34	3.41	1.64	0.44	0.10	0.01	0.00	
-50	27.5	27.0	26.1	25.0	23.6	22.0	20.2	18.2	16.0	13.7	11.3	8.71	6.11	3.56	1.29	0.16	0.01	0.00	
-40	34.5	33.8	32.8	31.4	29.8	27.9	25.6	23.2	20.5	17.7	14.8	11.7	8.58	5.42	2.44	0.31	0.02	0.00	
-30	40.2	39.4	38.3	36.8	35.0	32.8	30.2	27.4	24.3	21.0	17.7	14.2	10.6	6.97	3.46	0.61	0.02	0.00	
-20	44.5	43.7	42.6	40.9	38.8	36.4	33.7	30.5	27.2	23.5	19.7	15.9	12.0	8.11	4.25	0.92	0.02	0.00	
-10	47.2	46.3	45.0	43.3	41.2	38.6	35.7	32.4	28.8	24.9	20.9	16.9	12.9	8.76	4.70	1.12	0.01	0.00	
0	48.0	47.1	45.8	44.1	41.9	39.2	36.2	32.9	29.2	25.3	21.2	17.2	13.1	8.90	4.79	1.14	0.00	0.00	
10	47.3	46.4	45.1	43.4	41.3	38.6	35.8	32.5	28.9	25.0	21.0	17.0	12.9	8.79	4.72	1.13	0.01	0.00	
20	44.7	43.9	42.8	41.1	39.0	36.6	33.8	30.7	27.3	23.6	19.8	16.0	12.1	8.17	4.28	0.95	0.03	0.00	
30	40.5	39.7	38.6	37.1	35.3	33.0	30.5	27.6	24.5	21.2	17.8	14.3	10.7	7.05	3.52	0.65	0.03	0.00	
40	34.9	34.3	33.2	31.8	30.2	28.2	25.9	23.5	20.8	17.9	15.0	11.9	8.71	5.51	2.51	0.35	0.03	0.00	
50	28.1	27.5	26.6	25.4	24.1	22.4	20.6	18.5	16.3	14.0	11.5	8.91	6.26	3.68	1.37	0.20	0.03	0.00	
60	20.5	20.0	19.3	18.4	17.3	16.0	14.6	13.0	11.3	9.44	7.51	5.52	3.58	1.77	0.52	0.15	0.02	0.00	
70	12.5	12.1	11.6	10.9	10.1	9.18	8.15	7.03	5.87	4.66	3.43	2.22	1.19	0.54	0.25	0.08	0.01	0.00	
80	4.60	4.31	3.97	3.58	3.14	2.70	2.25	1.81	1.38	1.04	0.75	0.50	0.31	0.16	0.07	0.02	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
130	0.03	0.03	0.03	0.04	0.04	0.04	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
140	0.14	0.14	0.12	0.13	0.11	0.09	0.08	0.07	0.06	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
150	0.17	0.17	0.17	0.16	0.16	0.14	0.13	0.11	0.10	0.08	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
160	0.26	0.25	0.23	0.23	0.21	0.17	0.15	0.14	0.12	0.12	0.07	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
170	0.30	0.30	0.30	0.28	0.25	0.23	0.18	0.15	0.14	0.13	0.10	0.02	0.00	0.00	0.00	0.00	0.00	0.00	
180	0.31	0.31	0.31	0.30	0.28	0.25	0.20	0.15	0.15	0.14	0.12	0.03	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-07-23

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: