

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		772.9 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax At 50% of Imax At 90% of Imax	115.6V x 117.8H 65.5V x 68.5H 3.1V x 3.2H
Beam Flux	Total To 10% of Imax To 50% of Imax To 90% of Imax	1000.0 lumens per klm. 958.6 lumens per klm. 549.8 lumens per klm. 1.2 lumens per klm.
	Upward LOR Downward LOR	0.3 % 99.7 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2020-10-31

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.06V I:0.4775A P:3.960W PF:0.6879 Freq:59.97Hz Lamp Flux:88.5434x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Path Light	WEIGHT:
SPEC.:4W 2700K Min beam angle	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

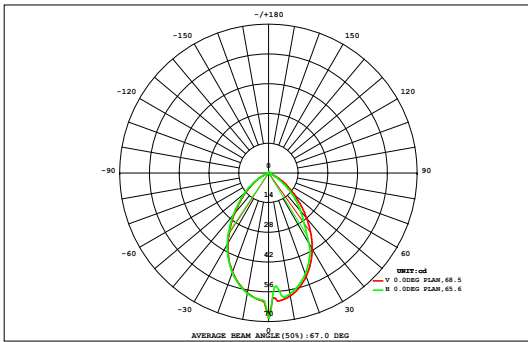

DATA OF LAMP		Eff:22.36lm/W	
MODEL	A5A1-4W-27K-BZ	Imax (cd)	68.44
NOMINAL POWER (W)	4	AVAILABILITY (%)	95.8
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	84.79
NOMINAL FLUX (lm)	88.5434	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	88.54
TEST VOLTAGE (V)	12	θ @50% (H,V)	69,66DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a	
	0	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180	190	200
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.00
70	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.05	0.06	0.06	0.05	0.04	0.02	0.01	0.00	0.00	0.00	0.00	0.33	0.00	
60	0.00	0.00	0.00	0.01	0.03	0.09	0.16	0.22	0.25	0.25	0.23	0.17	0.10	0.04	0.01	0.00	0.00	0.00	1.57	0.89	
50	0.00	0.00	0.00	0.03	0.11	0.23	0.36	0.48	0.55	0.55	0.50	0.39	0.25	0.13	0.04	0.01	0.00	0.00	3.62	3.35	
40	0.00	0.00	0.01	0.07	0.20	0.39	0.60	0.79	0.89	0.90	0.81	0.64	0.42	0.23	0.08	0.01	0.00	0.00	6.05	5.88	
30	0.00	0.00	0.02	0.11	0.29	0.55	0.86	1.16	1.34	1.35	1.19	0.90	0.60	0.33	0.13	0.02	0.00	0.00	8.84	8.71	
20	0.00	0.00	0.02	0.14	0.36	0.69	1.09	1.43	1.62	1.64	1.47	1.14	0.75	0.41	0.17	0.04	0.00	0.00	11.0	10.9	
10	0.00	0.00	0.03	0.16	0.41	0.78	1.21	1.56	1.76	1.77	1.61	1.27	0.85	0.46	0.19	0.04	0.00	0.00	12.1	12.0	
0	0.00	0.00	0.03	0.16	0.41	0.78	1.20	1.56	1.77	1.79	1.61	1.27	0.85	0.46	0.19	0.04	0.00	0.00	12.1	12.0	
-10	0.00	0.00	0.03	0.15	0.37	0.70	1.09	1.42	1.61	1.62	1.46	1.15	0.76	0.41	0.17	0.04	0.00	0.00	11.0	10.9	
-20	0.00	0.00	0.02	0.12	0.30	0.57	0.89	1.17	1.33	1.34	1.20	0.93	0.62	0.34	0.14	0.02	0.00	0.00	8.99	8.86	
-30	0.00	0.00	0.01	0.07	0.22	0.41	0.63	0.84	0.97	0.98	0.87	0.67	0.44	0.24	0.09	0.01	0.00	0.00	6.45	6.29	
-40	0.00	0.00	0.00	0.03	0.12	0.25	0.40	0.52	0.59	0.60	0.54	0.42	0.28	0.14	0.04	0.01	0.00	0.00	3.93	3.70	
-50	0.00	0.00	0.00	0.01	0.04	0.11	0.19	0.26	0.30	0.31	0.27	0.20	0.12	0.05	0.01	0.00	0.00	0.00	1.87	1.32	
-60	0.00	0.00	0.00	0.00	0.01	0.02	0.04	0.06	0.08	0.08	0.06	0.04	0.02	0.01	0.00	0.00	0.00	0.00	0.41	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL (DEG)	20	30	40	50	60	70	80	90				
Φ t	0.00	0.00	0.17	1.06	2.87	5.58	8.75	11.5	13.1	13.3	11.9	9.22	6.08	3.25	1.28	0.24	0.01	0.00	88	---	
Φ a	0.00	0.00	0.00	0.66	2.61	5.34	8.52	11.3	12.9	13.0	11.6	8.99	5.84	3.00	0.94	0.00	0.00	0.00	---	85	


one-half-peak spread: U:34.0,D:25.1 , L:33.4,R:31.7 NEMA Beam Type: Type 6

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2020-10-31

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.06V I:0.4775A P:3.960W PF:0.6879 Freq:59.97Hz Lamp Flux:88.5434x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Path Light	WEIGHT:
SPEC.:4W 2700K Min beam angle	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

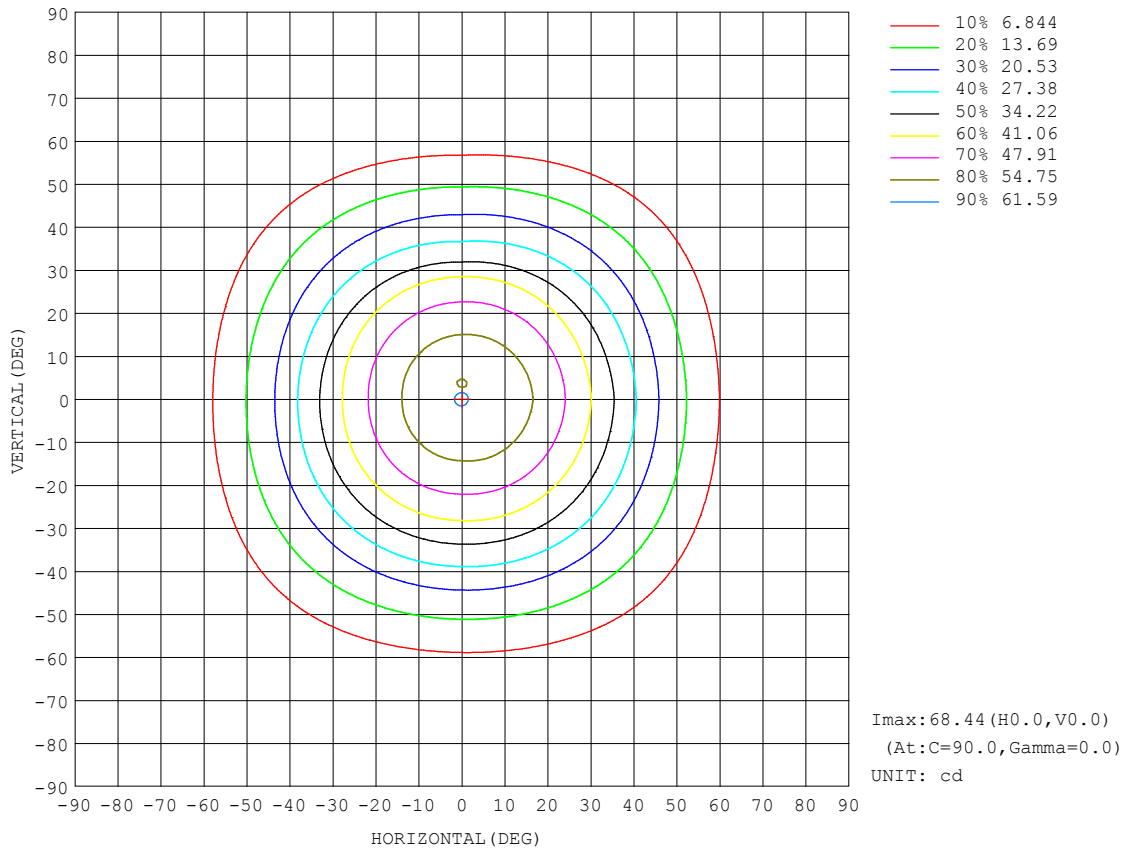


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2020-10-31

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.06V I:0.4775A P:3.960W PF:0.6879 Freq:59.97Hz Lamp Flux:88.5434x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Path Light	WEIGHT:
SPEC.:4W 2700K Min beam angle	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

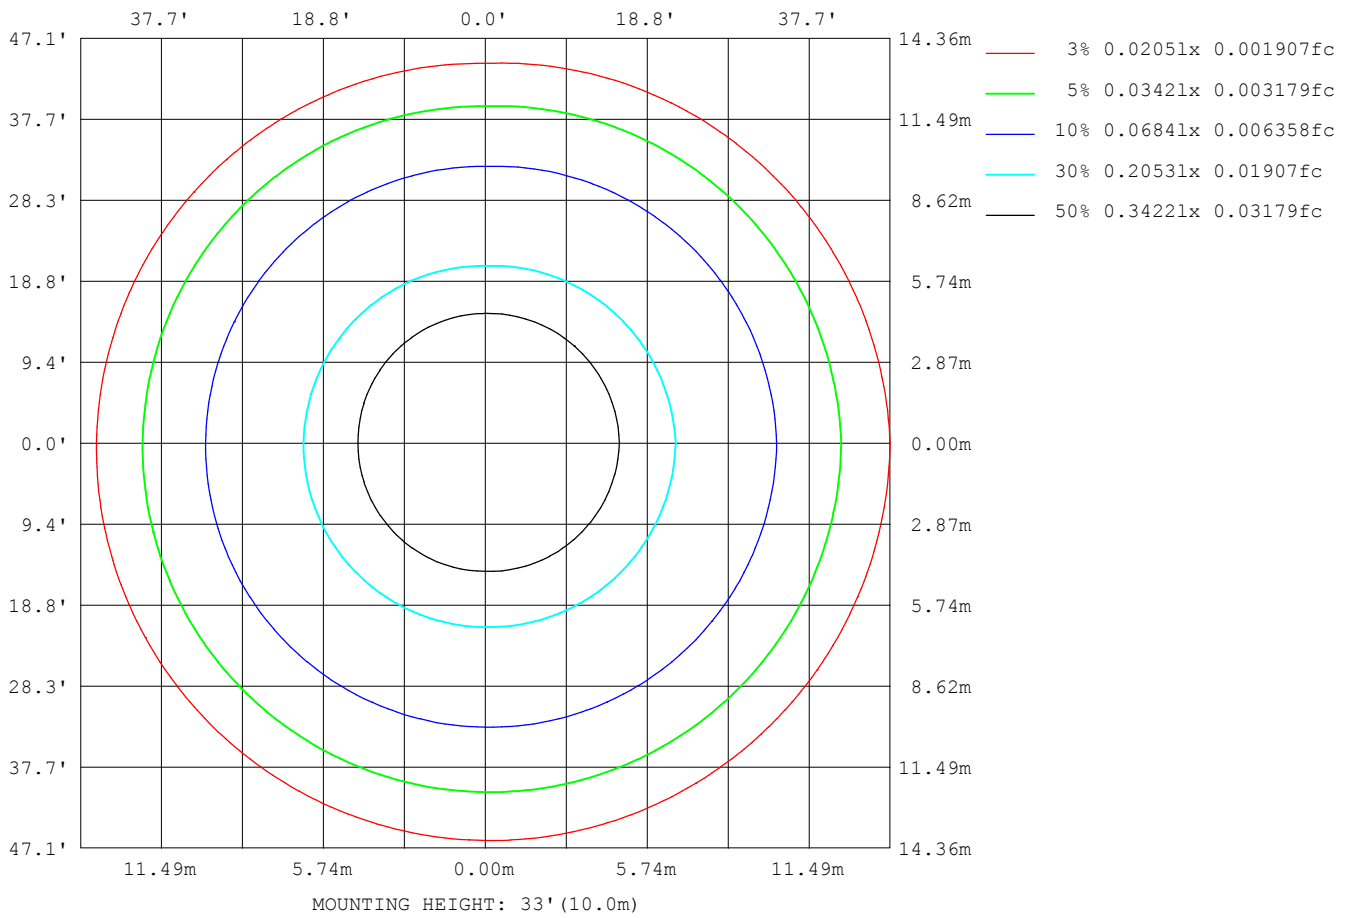

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2020-10-31

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

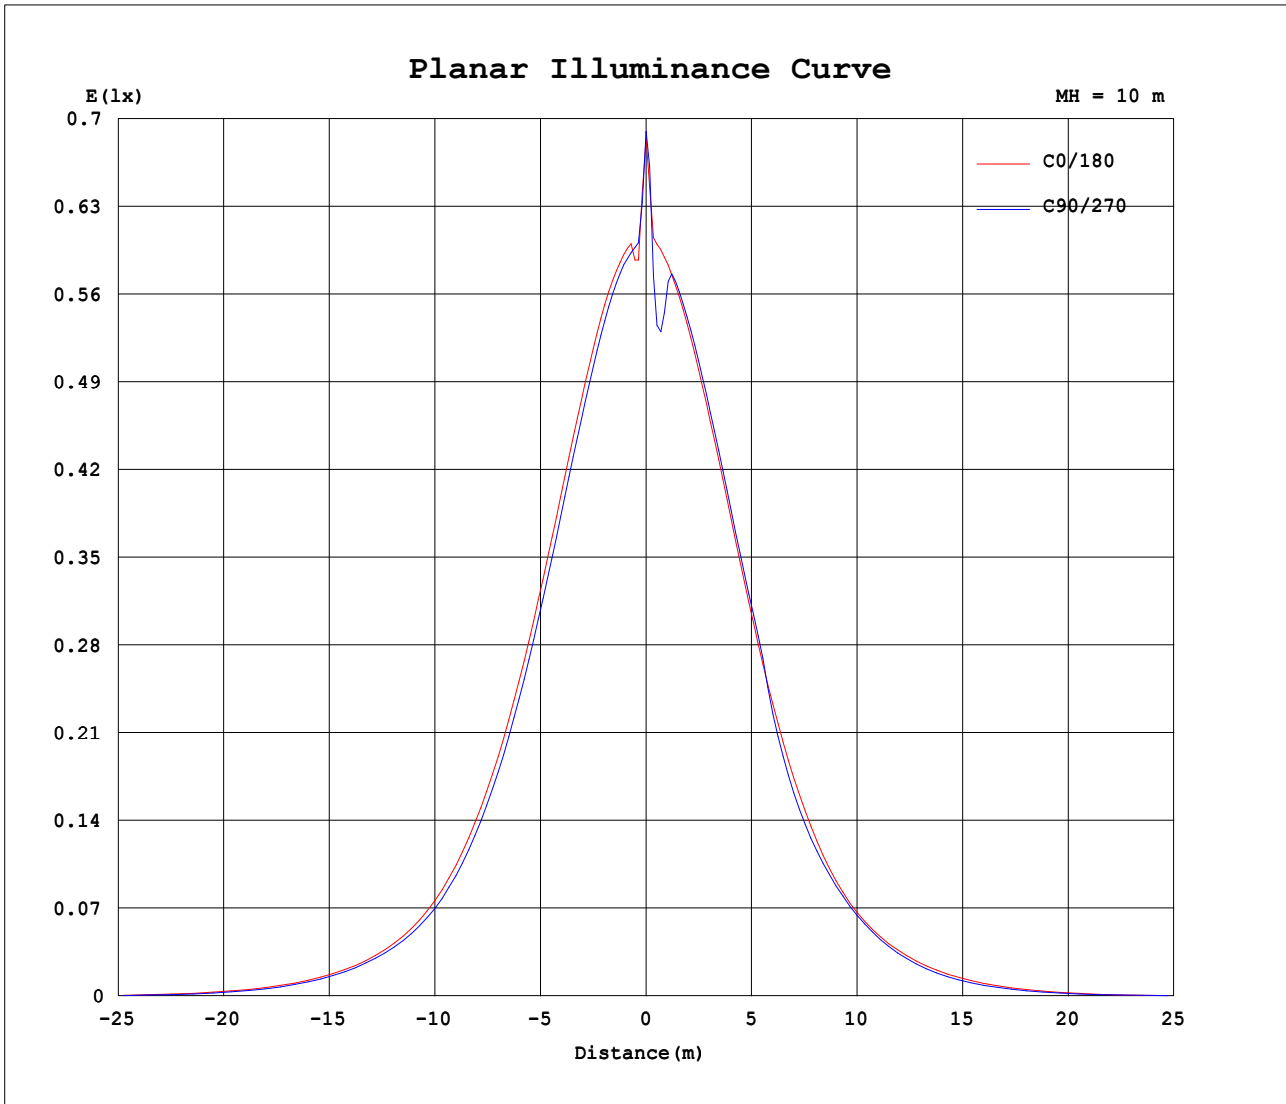


H(β) Range:-90 - 90DEG
 H(β) Interval: 0.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:ADMIN
 Test Date:2020-10-31

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
 Humidity:65.0%
 Test Distance:13.563m [K=1.0000]
 Remarks:

AAI Figure

Test:U:12.06V I:0.4775A P:3.960W PF:0.6879 Freq:59.97Hz Lamp Flux:88.5434x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Path Light	WEIGHT:
SPEC.:4W 2700K Min beam angle	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

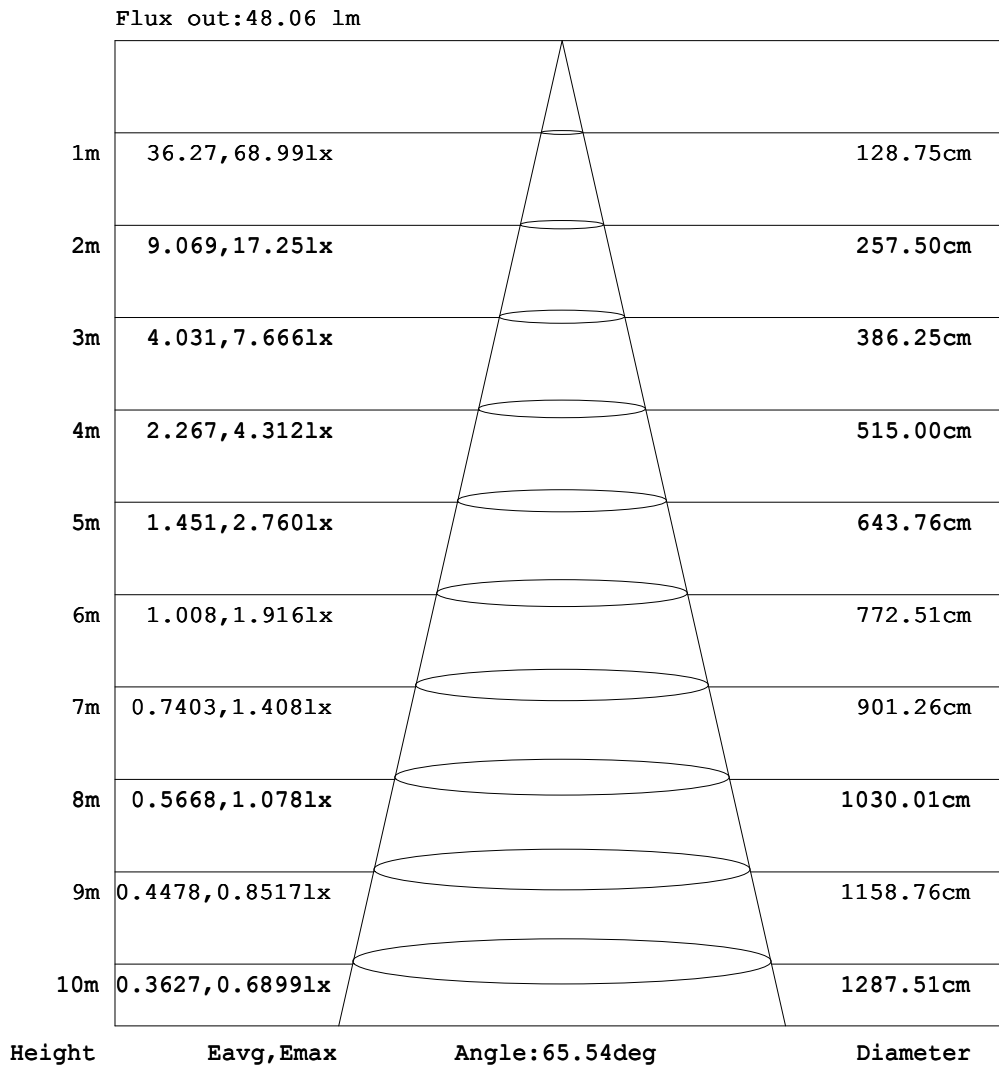

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2020-10-31

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.06V I:0.4775A P:3.960W PF:0.6879 Freq:59.97Hz Lamp Flux:88.5434x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Path Light	WEIGHT:
SPEC.:4W 2700K Min beam angle	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.08	0.12	0.17	0.23	0.27	0.32	0.33	0.34
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.07	0.12	0.17	0.22	0.26	0.30	0.32	0.33
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.09	0.13	0.17	0.21	0.24	0.26	0.28
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.03	0.07	0.11	0.14	0.16	0.18	0.19
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.03	0.04	0.06	0.08	0.09
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.08	0.17	0.25	0.32	0.38	0.44	0.50	0.54	0.55
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.18	0.34	0.56	1.01	1.71	2.54	3.39	4.20	4.89	5.42	5.76	5.90
-50	0.00	0.00	0.00	0.00	0.00	0.11	0.32	0.71	1.77	3.33	5.17	7.05	8.87	10.5	11.9	13.1	14.0	14.6	14.8
-40	0.00	0.00	0.00	0.00	0.05	0.32	0.94	2.66	5.08	7.78	10.6	13.2	15.8	18.3	20.7	22.8	24.5	25.6	26.0
-30	0.00	0.00	0.00	0.00	0.19	0.65	2.39	5.23	8.56	12.1	15.7	19.5	23.6	27.8	31.5	34.6	36.9	38.4	38.9
-20	0.00	0.00	0.00	0.00	0.30	1.23	3.88	7.44	11.4	15.6	20.3	25.7	31.3	36.5	41.1	44.8	47.6	49.3	49.9
-10	0.00	0.00	0.00	0.02	0.38	1.76	4.92	8.88	13.3	18.1	23.8	30.2	36.5	42.4	47.5	51.6	54.8	56.8	57.6
0	0.00	0.00	0.00	0.02	0.41	1.94	5.26	9.33	13.9	18.9	25.0	31.7	38.3	44.4	49.7	54.0	57.3	59.6	68.4
10	0.00	0.00	0.00	0.02	0.38	1.73	4.83	8.73	13.1	17.9	23.5	29.7	36.1	42.5	47.7	51.8	55.0	57.0	57.8
20	0.00	0.00	0.00	0.00	0.29	1.20	3.74	7.16	11.1	15.3	19.9	25.0	30.2	35.6	41.3	45.1	48.0	49.8	50.5
30	0.00	0.00	0.00	0.00	0.17	0.62	2.25	4.91	8.06	11.5	15.1	18.8	22.7	26.3	29.7	32.7	35.2	37.2	38.0
40	0.00	0.00	0.00	0.00	0.04	0.30	0.88	2.44	4.62	7.08	9.70	12.4	15.0	17.4	19.6	21.4	22.7	23.4	23.6
50	0.00	0.00	0.00	0.00	0.00	0.09	0.29	0.65	1.57	2.93	4.49	6.10	7.71	9.18	10.5	11.6	12.4	12.9	13.0
60	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.14	0.29	0.49	0.87	1.43	2.08	2.73	3.34	3.81	4.16	4.34	4.36
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.12	0.17	0.24	0.28	0.32	0.36	0.38	0.38
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.03	0.05	0.06	0.08	0.09
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.08	0.13	0.15	0.16	0.17	0.16
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.05	0.09	0.15	0.19	0.22	0.26	0.29	0.29
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.08	0.12	0.17	0.23	0.27	0.32	0.33	0.33

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2020-10-31

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.06V I:0.4775A P:3.960W PF:0.6879 Freq:59.97Hz Lamp Flux:88.5434x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Path Light	WEIGHT:
SPEC.:4W 2700K Min beam angle	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	0.31	0.29	0.28	0.25	0.18	0.13	0.12	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-170	0.32	0.30	0.28	0.22	0.18	0.13	0.12	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-160	0.27	0.24	0.22	0.18	0.14	0.13	0.05	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-150	0.18	0.16	0.15	0.13	0.08	0.04	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-140	0.08	0.06	0.04	0.03	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.55	0.53	0.49	0.43	0.38	0.32	0.24	0.17	0.09	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	5.86	5.60	5.16	4.54	3.79	2.96	2.11	1.34	0.77	0.47	0.30	0.14	0.04	0.00	0.00	0.00	0.00	0.00
-50	14.7	14.3	13.5	12.5	11.1	9.59	7.82	5.94	4.07	2.37	1.08	0.49	0.24	0.06	0.00	0.00	0.00	0.00
-40	25.8	25.0	23.6	21.6	19.3	16.9	14.3	11.6	8.86	6.08	3.49	1.47	0.51	0.21	0.01	0.00	0.00	0.00
-30	38.7	37.5	35.5	32.7	29.3	25.3	21.1	17.1	13.4	9.86	6.40	3.29	1.08	0.37	0.08	0.00	0.00	0.00
-20	49.7	48.3	45.9	42.5	38.2	33.3	27.9	22.4	17.4	13.0	8.88	5.06	1.97	0.51	0.14	0.00	0.00	0.00
-10	57.3	55.7	52.9	49.2	44.4	38.9	32.8	26.5	20.3	15.1	10.5	6.29	2.69	0.64	0.19	0.00	0.00	0.00
0	60.4	58.8	55.9	51.8	46.9	41.2	34.8	28.1	21.5	15.9	11.1	6.76	2.98	0.69	0.21	0.00	0.00	0.00
10	57.5	56.0	53.2	49.3	44.5	38.5	32.3	26.2	20.1	14.9	10.4	6.20	2.66	0.63	0.19	0.00	0.00	0.00
20	50.2	48.7	46.2	42.7	37.3	32.3	27.2	22.0	17.0	12.6	8.60	4.92	1.93	0.50	0.14	0.00	0.00	0.00
30	37.5	35.9	33.7	30.9	27.8	24.3	20.5	16.5	12.8	9.37	6.08	3.15	1.06	0.36	0.08	0.00	0.00	0.00
40	23.7	23.2	22.2	20.5	18.4	16.0	13.4	10.8	8.17	5.62	3.27	1.41	0.48	0.20	0.01	0.00	0.00	0.00
50	13.0	12.7	12.0	11.0	9.81	8.43	6.88	5.26	3.66	2.18	1.02	0.45	0.23	0.06	0.00	0.00	0.00	0.00
60	4.44	4.34	4.08	3.68	3.12	2.49	1.83	1.20	0.70	0.42	0.27	0.13	0.04	0.00	0.00	0.00	0.00	0.00
70	0.39	0.39	0.37	0.34	0.30	0.25	0.20	0.14	0.08	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.08	0.06	0.06	0.05	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160	0.17	0.16	0.15	0.13	0.09	0.08	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
170	0.28	0.27	0.24	0.18	0.17	0.11	0.10	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
180	0.31	0.29	0.28	0.25	0.18	0.13	0.12	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2020-10-31

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: