

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		2652.6 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax At 50% of Imax At 90% of Imax	56.0V x 56.0H 33.3V x 33.2H 13.0V x 13.1H
Beam Flux	Total To 10% of Imax To 50% of Imax To 90% of Imax	1000.4 lumens per klm. 804.0 lumens per klm. 511.0 lumens per klm. 94.9 lumens per klm.
	Upward LOR Downward LOR	1.1 % 98.9 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 0.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:ADMIN  
Test Date:2022-08-20

V(B) Range:-180 - 180DEG  
V(B) Interval: 0.5DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.352  
Humidity:65.0%  
Test Distance:13.563m [K=1.0000]  
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.04V I:0.4217A P:4.624W PF:0.9108 Freq:59.98Hz Lamp Flux:395.394x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight	WEIGHT:
SPEC.:5W 3000K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:NON SHROUD

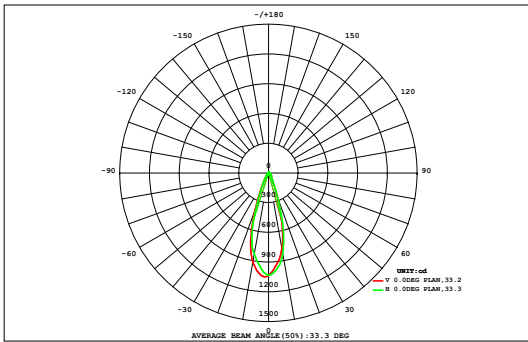

DATA OF LAMP		Eff:85.51lm/W	
MODEL	D6B1-5W-30K-A	Imax (cd)	1049
NOMINAL POWER (W)	5	AVAILABILITY (%)	80.6
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	318.6
NOMINAL FLUX (lm)	395.394	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	395.4
TEST VOLTAGE (V)	12	θ @50% (H, V)	33,33DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.05	0.07	0.09	0.10	0.12	0.14	0.16	0.17	0.17	0.17	0.16	0.15	0.13	0.11	0.09	0.08	0.06	0.05	2.07	0.00
45	0.05	0.07	0.09	0.10	0.12	0.14	0.16	0.17	0.17	0.17	0.16	0.15	0.13	0.11	0.09	0.08	0.06	0.05	2.07	0.00
40	0.06	0.08	0.11	0.13	0.16	0.20	0.23	0.25	0.26	0.26	0.24	0.21	0.18	0.15	0.12	0.10	0.08	0.06	2.88	0.00
35	0.08	0.10	0.14	0.18	0.23	0.30	0.36	0.42	0.44	0.43	0.39	0.33	0.27	0.21	0.16	0.12	0.09	0.07	4.30	0.00
30	0.09	0.12	0.17	0.25	0.35	0.48	0.62	0.74	0.80	0.77	0.69	0.56	0.42	0.29	0.21	0.15	0.11	0.08	6.89	1.33
25	0.10	0.15	0.22	0.35	0.53	0.79	1.11	1.41	1.55	1.49	1.26	0.95	0.66	0.44	0.28	0.18	0.13	0.09	11.7	8.27
20	0.12	0.18	0.29	0.48	0.80	1.34	2.07	2.80	3.18	3.07	2.49	1.70	1.04	0.63	0.38	0.23	0.15	0.10	21.0	18.3
15	0.13	0.21	0.36	0.64	1.19	2.19	3.56	4.77	5.34	5.19	4.34	2.94	1.63	0.87	0.48	0.27	0.17	0.11	34.4	32.0
10	0.14	0.24	0.43	0.80	1.63	3.16	5.00	6.34	6.91	6.73	5.81	4.19	2.32	1.11	0.58	0.31	0.18	0.11	46.0	43.9
5	0.15	0.26	0.47	0.92	1.97	3.86	5.86	7.16	7.70	7.41	6.46	4.85	2.77	1.28	0.63	0.33	0.19	0.12	52.4	50.3
0	0.15	0.26	0.48	0.93	2.00	3.92	5.91	7.13	7.66	7.36	6.44	4.90	2.83	1.30	0.63	0.34	0.19	0.12	52.5	50.5
-5	0.14	0.24	0.43	0.82	1.69	3.32	5.19	6.42	6.83	6.65	5.89	4.39	2.48	1.17	0.59	0.32	0.18	0.12	46.9	44.8
-10	0.13	0.21	0.37	0.66	1.24	2.37	3.91	5.15	5.70	5.55	4.72	3.29	1.81	0.92	0.50	0.28	0.17	0.11	37.1	34.8
-15	0.12	0.18	0.30	0.50	0.85	1.46	2.36	3.29	3.83	3.72	2.98	1.98	1.16	0.67	0.39	0.24	0.15	0.10	24.3	21.7
-20	0.11	0.15	0.23	0.36	0.56	0.85	1.24	1.66	1.91	1.85	1.51	1.08	0.72	0.47	0.30	0.19	0.13	0.09	13.4	10.2
-25	0.09	0.13	0.18	0.26	0.37	0.52	0.68	0.83	0.92	0.90	0.78	0.61	0.45	0.32	0.22	0.15	0.11	0.08	7.59	2.46
-30	0.08	0.11	0.14	0.19	0.25	0.32	0.40	0.46	0.50	0.49	0.44	0.36	0.29	0.22	0.16	0.12	0.09	0.07	4.67	0.00
-35	0.07	0.09	0.11	0.14	0.17	0.21	0.24	0.27	0.29	0.28	0.26	0.23	0.19	0.16	0.13	0.10	0.08	0.06	3.07	0.00
-40	0.06	0.07	0.09	0.11	0.13	0.15	0.17	0.18	0.18	0.18	0.17	0.16	0.14	0.12	0.10	0.08	0.06	0.05	2.19	0.00
-45	0.06	0.07	0.09	0.11	0.13	0.15	0.17	0.18	0.18	0.18	0.17	0.16	0.14	0.12	0.10	0.08	0.06	0.05	2.19	0.00
	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)	10	15	20	25	30	35	40	45			
Φ t	1.88	2.85	4.60	7.83	14.2	25.6	39.1	49.4	54.2	52.5	45.0	32.9	19.5	10.4	5.95	3.59	2.31	1.57	373	---
Φ a	0.00	0.00	0.00	3.42	10.9	22.7	36.5	47.0	51.6	50.0	42.6	30.2	16.5	6.74	0.53	0.00	0.00	0.00	---	319


one-half-peak spread: U:17.6,D:15.9 , L:16.1,R:17.2 NEMA Beam Type: Type 4

H(β) Range:-90 - 90DEG  
H(β) Interval: 0.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:ADMIN  
Test Date:2022-08-20

V(B) Range:-180 - 180DEG  
V(B) Interval: 0.5DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.352  
Humidity:65.0%  
Test Distance:13.563m [K=1.0000]  
Remarks:

**ISOCANDELA DIAGRAM**

Test:U:12.04V I:0.4217A P:4.624W PF:0.9108 Freq:59.98Hz Lamp Flux:395.394x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight	WEIGHT:
SPEC.:5W 3000K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:NON SHROUD

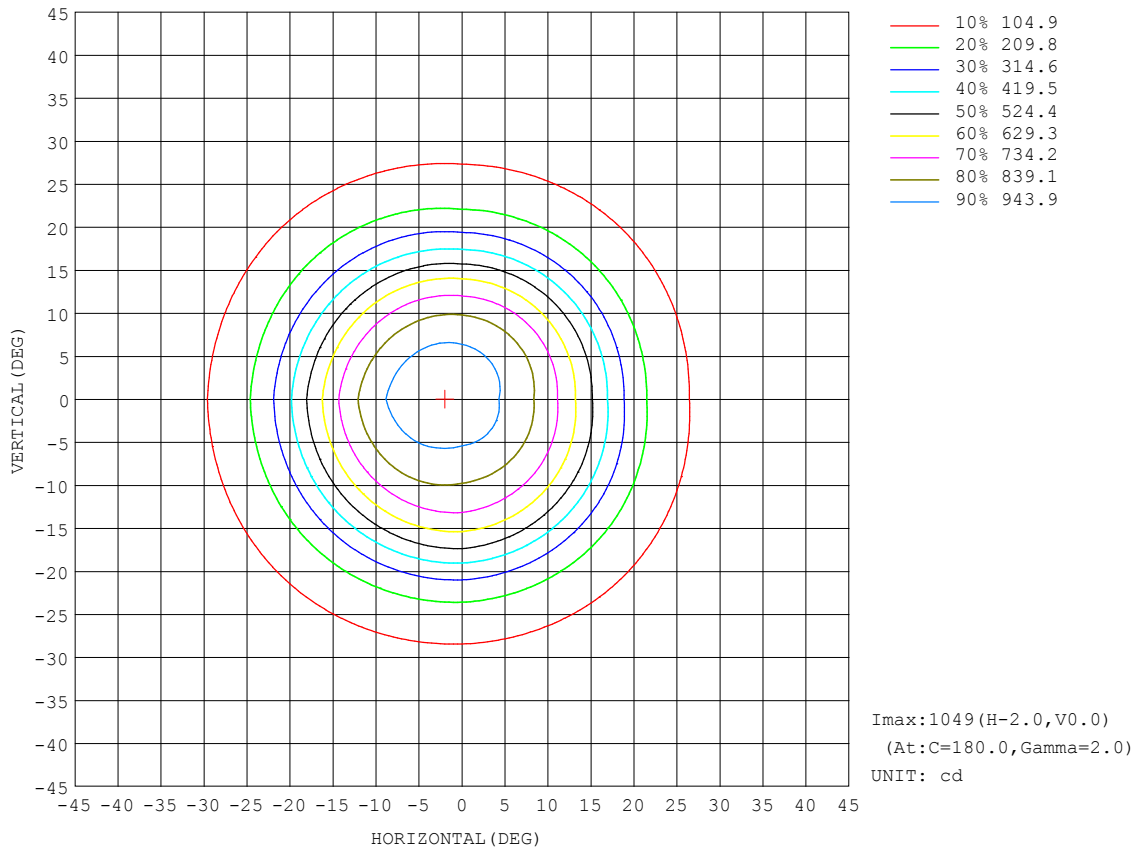


H(β) Range:-90 - 90DEG  
H(β) Interval: 0.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:ADMIN  
Test Date:2022-08-20

V(B) Range:-180 - 180DEG  
V(B) Interval: 0.5DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.352  
Humidity:65.0%  
Test Distance:13.563m [K=1.0000]  
Remarks:

**ISOLUX DIAGRAM**


Test:U:12.04V I:0.4217A P:4.624W PF:0.9108 Freq:59.98Hz Lamp Flux:395.394x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight	WEIGHT:
SPEC.:5W 3000K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:NON SHROUD

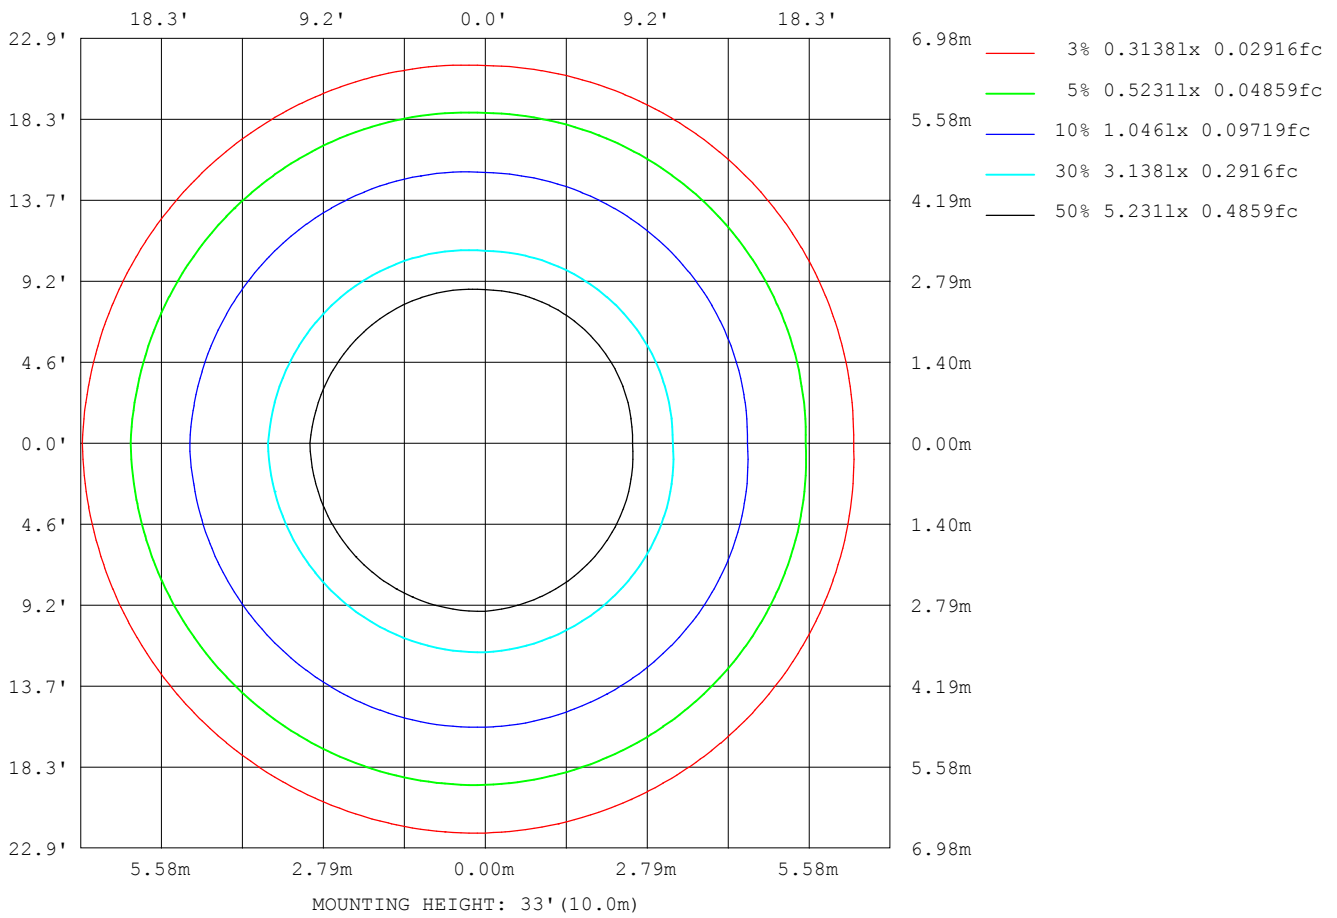

**H(β) Range:-90 - 90DEG**  
**H(β) Interval: 0.5DEG**  
**Test Speed: HIGH**  
**Temperature:25.3DEG**  
**Operators:ADMIN**  
**Test Date:2022-08-20**

**V(B) Range:-180 - 180DEG**  
**V(B) Interval: 0.5DEG**  
**Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.352**  
**Humidity:65.0%**  
**Test Distance:13.563m [K=1.0000]**  
**Remarks:**

Planar Illuminance Curve

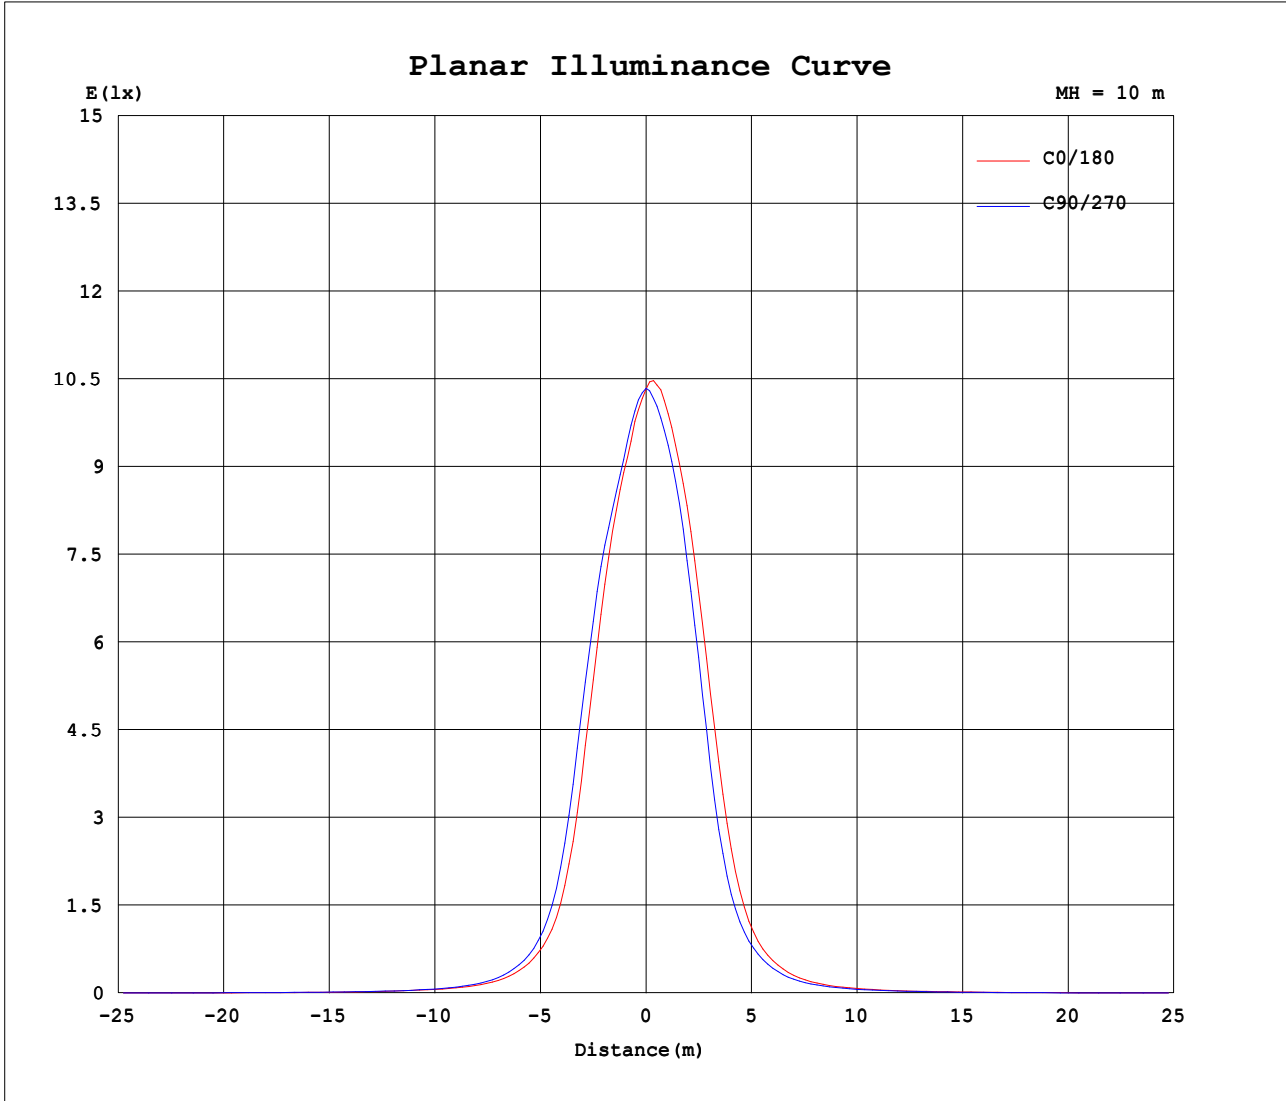


H( $\beta$ ) Range:-90 - 90DEG  
 H( $\beta$ ) Interval: 0.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:ADMIN  
 Test Date:2022-08-20

V(B) Range:-180 - 180DEG  
 V(B) Interval: 0.5DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.352  
 Humidity:65.0%  
 Test Distance:13.563m [K=1.0000]  
 Remarks:

**AAI Figure**

Test:U:12.04V I:0.4217A P:4.624W PF:0.9108 Freq:59.98Hz Lamp Flux:395.394x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight	WEIGHT:
SPEC.:5W 3000K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:NON SHROUD

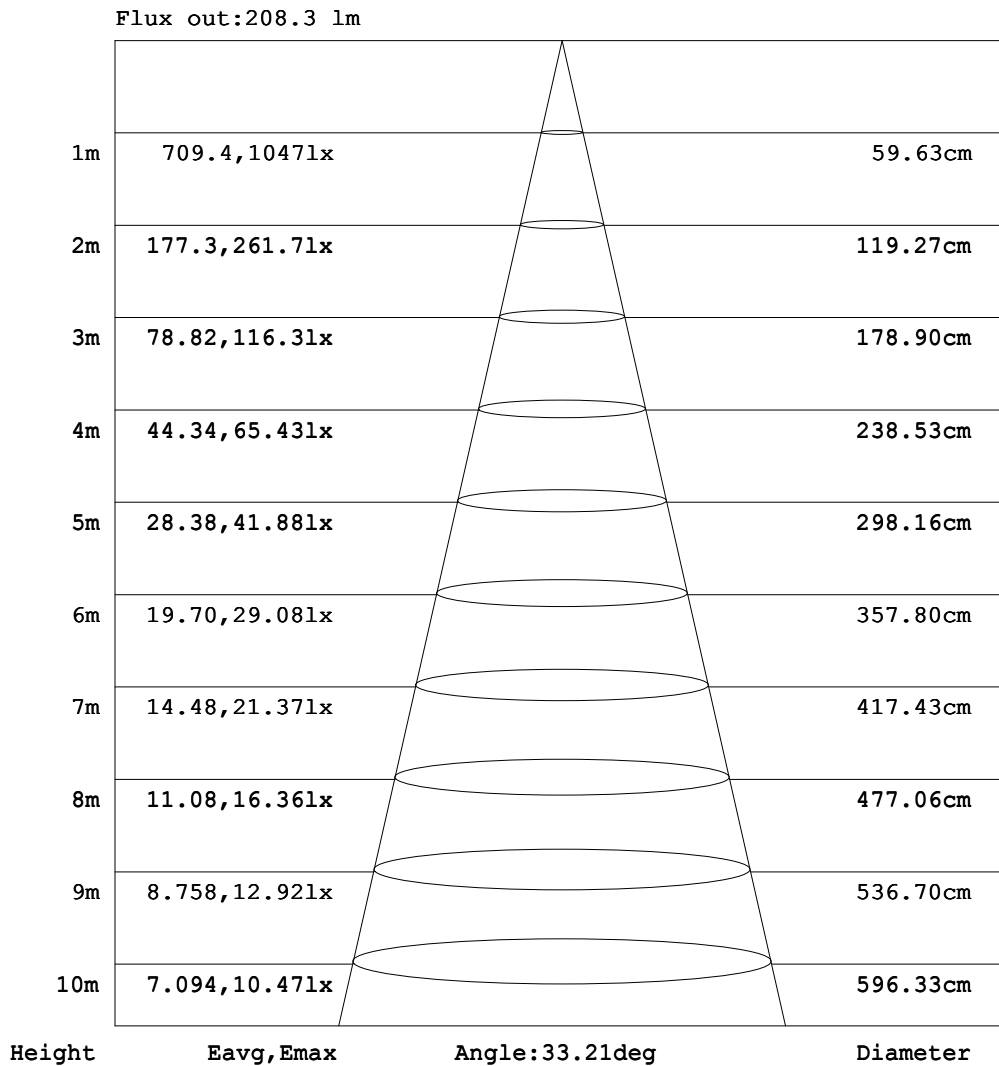

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG  
H(β) Interval: 0.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:ADMIN  
Test Date:2022-08-20

V(B) Range:-180 - 180DEG  
V(B) Interval: 0.5DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.352  
Humidity:65.0%  
Test Distance:13.563m [K=1.0000]  
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.04V I:0.4217A P:4.624W PF:0.9108 Freq:59.98Hz Lamp Flux:395.394x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight	WEIGHT:
SPEC.:5W 3000K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:NON SHROUD

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.15	0.44	0.96	1.65	2.41	3.12	3.57	3.79	3.91	4.11
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.17	0.47	0.97	1.66	2.44	3.18	3.77	4.11	4.30	4.46
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.12	0.35	0.72	1.26	1.91	2.58	3.21	3.73	4.11	4.37
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.06	0.16	0.38	0.69	1.09	1.55	2.00	2.40	2.73	2.94
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.05	0.12	0.24	0.41	0.61	0.82	1.02	1.19	1.29
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.07	0.12	0.18	0.22	0.27	0.30
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.05	0.13	0.22	0.31	0.40	0.47	0.53	0.57	0.59	0.60
-70	0.00	0.00	0.00	0.00	0.04	0.26	0.59	0.96	1.34	1.68	2.05	2.40	2.69	2.97	3.19	3.37	3.50	3.58	3.60
-60	0.00	0.00	0.00	0.13	0.59	1.21	1.84	2.55	3.24	3.95	4.64	5.28	5.91	6.49	6.95	7.27	7.56	7.74	7.77
-50	0.00	0.00	0.03	0.53	1.35	2.27	3.26	4.33	5.46	6.67	7.82	9.01	10.2	11.3	12.4	13.2	13.9	14.3	14.3
-40	0.00	0.00	0.16	1.00	2.08	3.32	4.71	6.29	7.93	9.75	11.8	14.1	16.7	19.5	22.4	25.2	27.6	29.2	29.5
-30	0.00	0.00	0.33	1.43	2.76	4.31	6.15	8.15	10.5	13.4	17.0	21.6	27.9	36.7	48.2	62.0	75.3	84.2	86.3
-20	0.00	0.00	0.49	1.73	3.29	5.10	7.28	9.82	13.0	17.3	23.4	33.0	49.9	78.2	120	187	271	343	366
-10	0.00	0.00	0.60	1.95	3.65	5.68	8.09	11.1	15.0	20.7	29.9	47.4	81.8	147	287	515	718	825	833
0	0.00	0.00	0.64	2.02	3.78	5.92	8.42	11.6	15.8	22.2	33.0	55.2	99.7	197	410	702	912	1024	1033
10	0.00	0.00	0.59	1.93	3.62	5.65	8.05	11.0	14.9	20.6	29.6	46.7	80.1	142	272	477	684	804	830
20	0.00	0.00	0.48	1.69	3.24	5.03	7.19	9.72	12.9	17.1	23.0	32.3	48.2	74.7	113	169	233	281	288
30	0.00	0.00	0.32	1.38	2.68	4.21	6.03	8.01	10.3	13.1	16.6	21.1	26.9	35.0	45.2	57.1	68.3	75.4	76.2
40	0.00	0.00	0.15	0.93	1.98	3.20	4.54	6.11	7.72	9.51	11.5	13.7	16.1	18.7	21.2	23.7	25.7	26.9	27.0
50	0.00	0.00	0.03	0.48	1.24	2.13	3.08	4.11	5.22	6.36	7.52	8.65	9.82	10.9	11.8	12.6	13.2	13.4	13.4
60	0.00	0.00	0.00	0.11	0.51	1.06	1.65	2.31	2.97	3.63	4.27	4.91	5.50	5.98	6.45	6.76	6.99	7.11	7.08
70	0.00	0.00	0.00	0.00	0.04	0.20	0.45	0.74	1.07	1.37	1.70	2.00	2.25	2.47	2.66	2.79	2.88	2.90	2.87
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.07	0.10	0.13	0.15	0.17	0.18	0.17	0.15	0.13
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.13	0.26	0.36	0.46	0.55	0.58
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.19	0.39	0.71	1.02	1.37	1.67	1.86	1.93
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.22	0.52	0.97	1.53	2.09	2.61	2.97	3.21	3.32
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.12	0.38	0.84	1.49	2.20	2.88	3.39	3.66	3.81	3.83
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.15	0.44	0.96	1.65	2.41	3.12	3.57	3.79	3.91	4.13

H(β) Range:-90 - 90DEG  
H(β) Interval: 0.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:ADMIN  
Test Date:2022-08-20

V(B) Range:-180 - 180DEG  
V(B) Interval: 0.5DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.352  
Humidity:65.0%  
Test Distance:13.563m [K=1.0000]  
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.04V I:0.4217A P:4.624W PF:0.9108 Freq:59.98Hz Lamp Flux:395.394x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight	WEIGHT:
SPEC.:5W 3000K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:NON SHROUD

Table--2

UNIT: cd

H (DEG) \ V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	4.18	4.35	4.56	4.48	4.01	3.25	2.41	1.64	0.91	0.45	0.16	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-170	4.50	4.58	4.54	4.29	3.72	2.96	2.16	1.40	0.77	0.39	0.16	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-160	4.34	4.20	3.88	3.46	2.86	2.21	1.58	1.00	0.52	0.22	0.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-150	2.90	2.74	2.48	2.12	1.72	1.27	0.85	0.49	0.25	0.14	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-140	1.29	1.20	1.08	0.89	0.67	0.47	0.31	0.15	0.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-130	0.30	0.28	0.25	0.19	0.13	0.10	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.57	0.52	0.46	0.39	0.30	0.22	0.13	0.06	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	3.53	3.40	3.22	2.99	2.74	2.42	2.08	1.73	1.34	0.97	0.59	0.29	0.08	0.00	0.00	0.00	0.00	0.00
-60	7.65	7.39	7.02	6.64	6.11	5.48	4.84	4.18	3.46	2.74	2.04	1.37	0.74	0.24	0.01	0.00	0.00	0.00
-50	14.1	13.5	12.7	11.7	10.6	9.45	8.30	7.11	5.97	4.79	3.70	2.65	1.69	0.83	0.18	0.00	0.00	0.00
-40	28.5	26.4	23.7	20.7	17.8	15.2	12.7	10.6	8.74	7.01	5.44	3.99	2.64	1.48	0.48	0.01	0.00	0.00
-30	81.0	69.7	55.5	42.3	31.9	24.3	18.8	14.9	11.7	9.16	7.08	5.21	3.53	2.06	0.84	0.06	0.00	0.00
-20	321	237	155	98.9	63.0	40.2	27.2	19.6	14.8	11.2	8.49	6.19	4.24	2.53	1.11	0.12	0.00	0.00
-10	783	635	408	206	107	60.7	36.1	23.8	17.0	12.6	9.34	6.83	4.66	2.82	1.29	0.17	0.00	0.00
0	927	780	533	266	126	68.9	39.2	25.2	17.7	13.0	9.64	7.04	4.79	2.91	1.34	0.18	0.00	0.00
10	761	601	370	191	103	59.1	35.4	23.5	16.9	12.5	9.29	6.79	4.63	2.80	1.27	0.16	0.00	0.00
20	260	198	137	91.7	59.5	38.4	26.5	19.1	14.5	11.1	8.39	6.11	4.16	2.47	1.07	0.11	0.00	0.00
30	72.1	62.7	50.6	39.3	30.2	23.3	18.2	14.5	11.5	9.01	6.94	5.09	3.43	1.98	0.78	0.04	0.00	0.00
40	26.2	24.5	22.2	19.6	17.0	14.6	12.4	10.3	8.50	6.80	5.26	3.82	2.51	1.39	0.42	0.01	0.00	0.00
50	13.2	12.8	12.1	11.2	10.2	9.08	7.95	6.81	5.66	4.55	3.48	2.47	1.55	0.72	0.13	0.00	0.00	0.00
60	7.02	6.82	6.51	6.14	5.61	5.07	4.46	3.81	3.14	2.47	1.81	1.18	0.59	0.15	0.00	0.00	0.00	0.00
70	2.85	2.77	2.64	2.46	2.24	1.98	1.68	1.37	1.03	0.70	0.38	0.15	0.02	0.00	0.00	0.00	0.00	0.00
80	0.13	0.12	0.11	0.09	0.06	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.03	0.06	0.07	0.07	0.06	0.07	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.65	0.65	0.62	0.54	0.39	0.27	0.20	0.10	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	2.04	2.01	1.85	1.60	1.34	0.98	0.66	0.36	0.19	0.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160	3.43	3.44	3.28	2.97	2.48	1.91	1.38	0.87	0.44	0.19	0.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00
170	4.01	4.13	4.16	3.98	3.48	2.78	2.03	1.32	0.72	0.37	0.16	0.00	0.00	0.00	0.00	0.00	0.00	0.00
180	4.18	4.35	4.56	4.48	4.01	3.25	2.41	1.64	0.91	0.45	0.16	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG  
H(β) Interval: 0.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:ADMIN  
Test Date:2022-08-20

V(B) Range:-180 - 180DEG  
V(B) Interval: 0.5DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.352  
Humidity:65.0%  
Test Distance:13.563m [K=1.0000]  
Remarks: