

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	855.6 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	108.2V x 107.9H
	At 50% of Imax	60.0V x 59.7H
	At 90% of Imax	25.7V x 25.4H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	896.6 lumens per klm.
	To 50% of Imax	522.2 lumens per klm.
	To 90% of Imax	126.2 lumens per klm.

Upward LOR	1.0 %
Downward LOR	99.0 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-12-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.03V I:0.4364A P:3.603W PF:0.6866 Freq:59.98Hz Lamp Flux:325.791x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Micro 3.5W 3000K	WEIGHT:
SPEC.: 60° LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

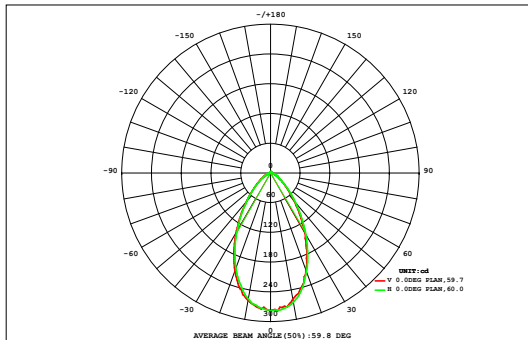

DATA OF LAMP		Eff:90.41lm/W	
MODEL M4B1	-3.5W-30K-60-A	Imax (cd)	278.7
NOMINAL POWER (W)	3.5	AVAILABILITY (%)	89.5
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	291.6
NOMINAL FLUX (lm)	325.791	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	325.8
TEST VOLTAGE (V)	12	θ @50% (H,V)	60,60DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.08	0.00
90	0.00	0.00	0.01	0.02	0.06	0.09	0.13	0.16	0.17	0.17	0.15	0.13	0.09	0.05	0.02	0.01	0.00	0.00	1.26	0.00
80	0.00	0.00	0.03	0.09	0.16	0.23	0.30	0.36	0.40	0.40	0.36	0.30	0.23	0.15	0.08	0.03	0.00	0.00	3.13	0.00
70	0.00	0.01	0.06	0.15	0.26	0.40	0.57	0.72	0.82	0.82	0.72	0.56	0.39	0.26	0.15	0.06	0.01	0.00	5.96	1.51
60	0.00	0.02	0.09	0.21	0.40	0.69	1.08	1.46	1.71	1.70	1.45	1.07	0.68	0.39	0.21	0.09	0.02	0.00	11.3	9.10
50	0.00	0.03	0.12	0.28	0.60	1.14	1.90	2.70	3.23	3.23	2.69	1.88	1.12	0.59	0.27	0.12	0.03	0.00	19.9	18.5
40	0.00	0.04	0.14	0.36	0.83	1.71	3.00	4.36	5.25	5.24	4.34	2.98	1.68	0.82	0.35	0.14	0.04	0.00	31.3	30.2
30	0.00	0.04	0.16	0.43	1.05	2.27	4.08	5.95	7.14	7.13	5.92	4.04	2.23	1.03	0.41	0.16	0.04	0.00	42.1	41.1
20	0.00	0.05	0.17	0.47	1.18	2.61	4.73	6.88	8.12	8.12	6.86	4.68	2.58	1.15	0.45	0.16	0.04	0.00	48.3	47.4
10	0.00	0.05	0.17	0.47	1.18	2.60	4.71	6.84	8.04	8.04	6.81	4.66	2.56	1.15	0.45	0.16	0.04	0.00	47.9	47.0
0	0.00	0.04	0.16	0.42	1.04	2.24	4.01	5.84	6.95	6.94	5.82	3.98	2.20	1.01	0.41	0.15	0.04	0.00	41.3	40.3
-10	0.00	0.04	0.14	0.35	0.82	1.67	2.93	4.23	5.05	5.05	4.21	2.90	1.64	0.80	0.34	0.14	0.04	0.00	30.4	29.2
-20	0.00	0.03	0.12	0.28	0.58	1.10	1.83	2.59	3.08	3.07	2.58	1.81	1.09	0.57	0.27	0.12	0.03	0.00	19.1	17.7
-30	0.00	0.02	0.09	0.20	0.39	0.67	1.02	1.38	1.60	1.59	1.37	1.01	0.66	0.38	0.20	0.09	0.02	0.00	10.7	8.43
-40	0.00	0.01	0.06	0.14	0.25	0.38	0.54	0.68	0.76	0.76	0.67	0.53	0.38	0.25	0.14	0.06	0.01	0.00	5.63	1.04
-50	0.00	0.00	0.03	0.08	0.15	0.22	0.29	0.34	0.37	0.37	0.34	0.28	0.22	0.15	0.08	0.03	0.00	0.00	2.94	0.00
-60	0.00	0.00	0.01	0.02	0.05	0.08	0.12	0.14	0.15	0.15	0.14	0.11	0.08	0.05	0.02	0.00	0.00	0.00	1.14	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
HORIZONTAL (DEG)																				
Φ t	0.01	0.39	1.55	3.97	8.99	18.1	31.2	44.7	52.9	52.8	44.4	30.9	17.9	8.79	3.87	1.52	0.37	0.01	322	---
Φ a	0.00	0.00	0.00	0.83	6.64	16.0	29.2	42.7	50.9	50.9	42.5	28.9	15.7	6.42	0.72	0.00	0.00	0.00	---	292

one-half-peak spread: U:29.7,D:27.7 , L:26.2,R:22.9


NEMA Beam Type: Type 6

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-12-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.03V I:0.4364A P:3.603W PF:0.6866 Freq:59.98Hz Lamp Flux:325.791x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Micro 3.5W 3000K	WEIGHT:
SPEC.:60°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

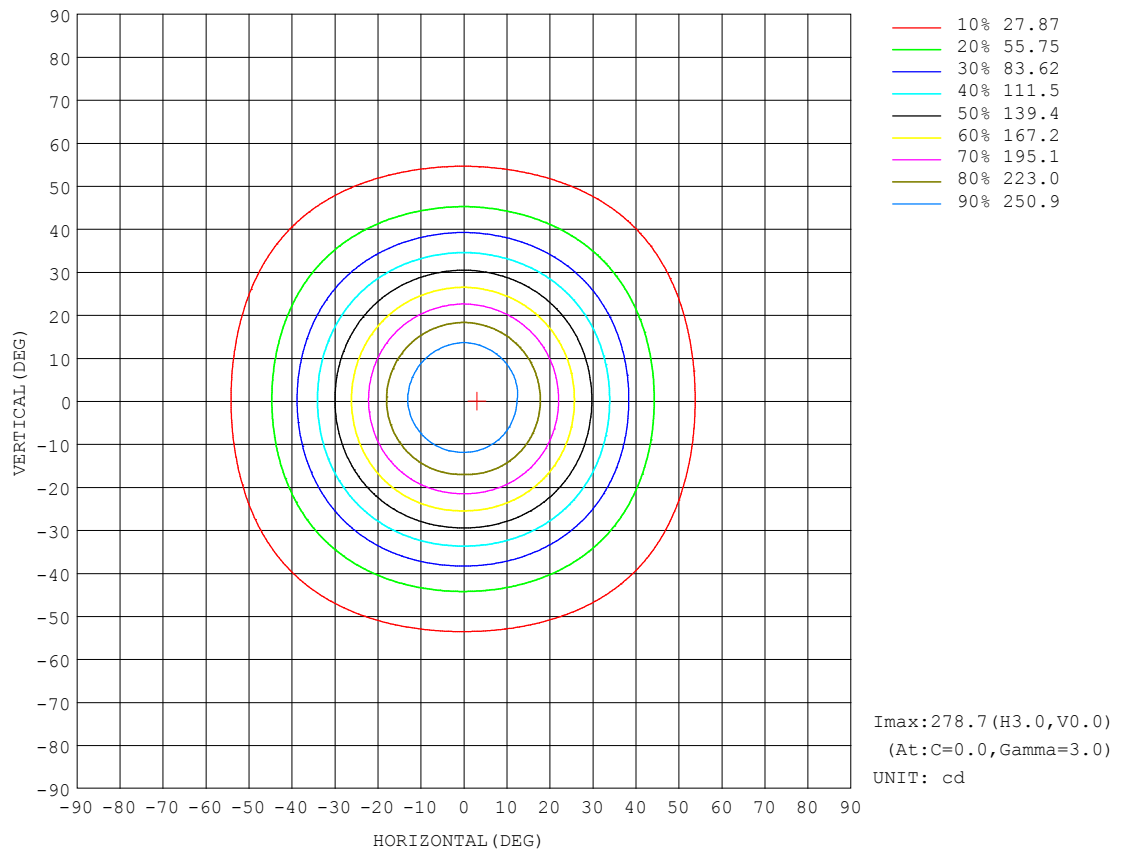


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-12-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.03V I:0.4364A P:3.603W PF:0.6866 Freq:59.98Hz Lamp Flux:325.79lx 1m		
NAME: LED LANDSCAPE LIGHT	TYPE:Micro 3.5W 3000K	WEIGHT:
SPEC.:60°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

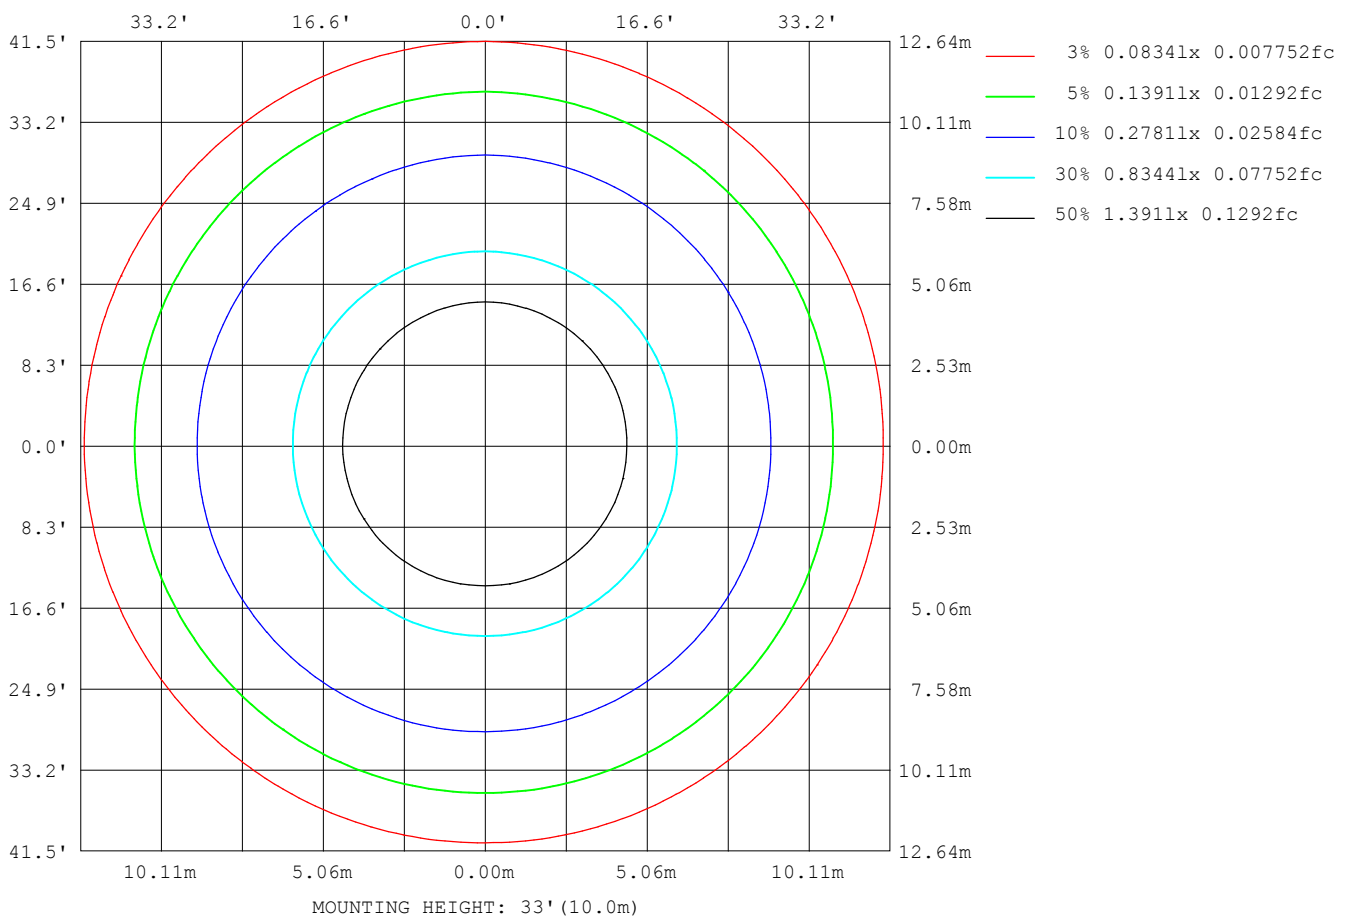

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-12-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

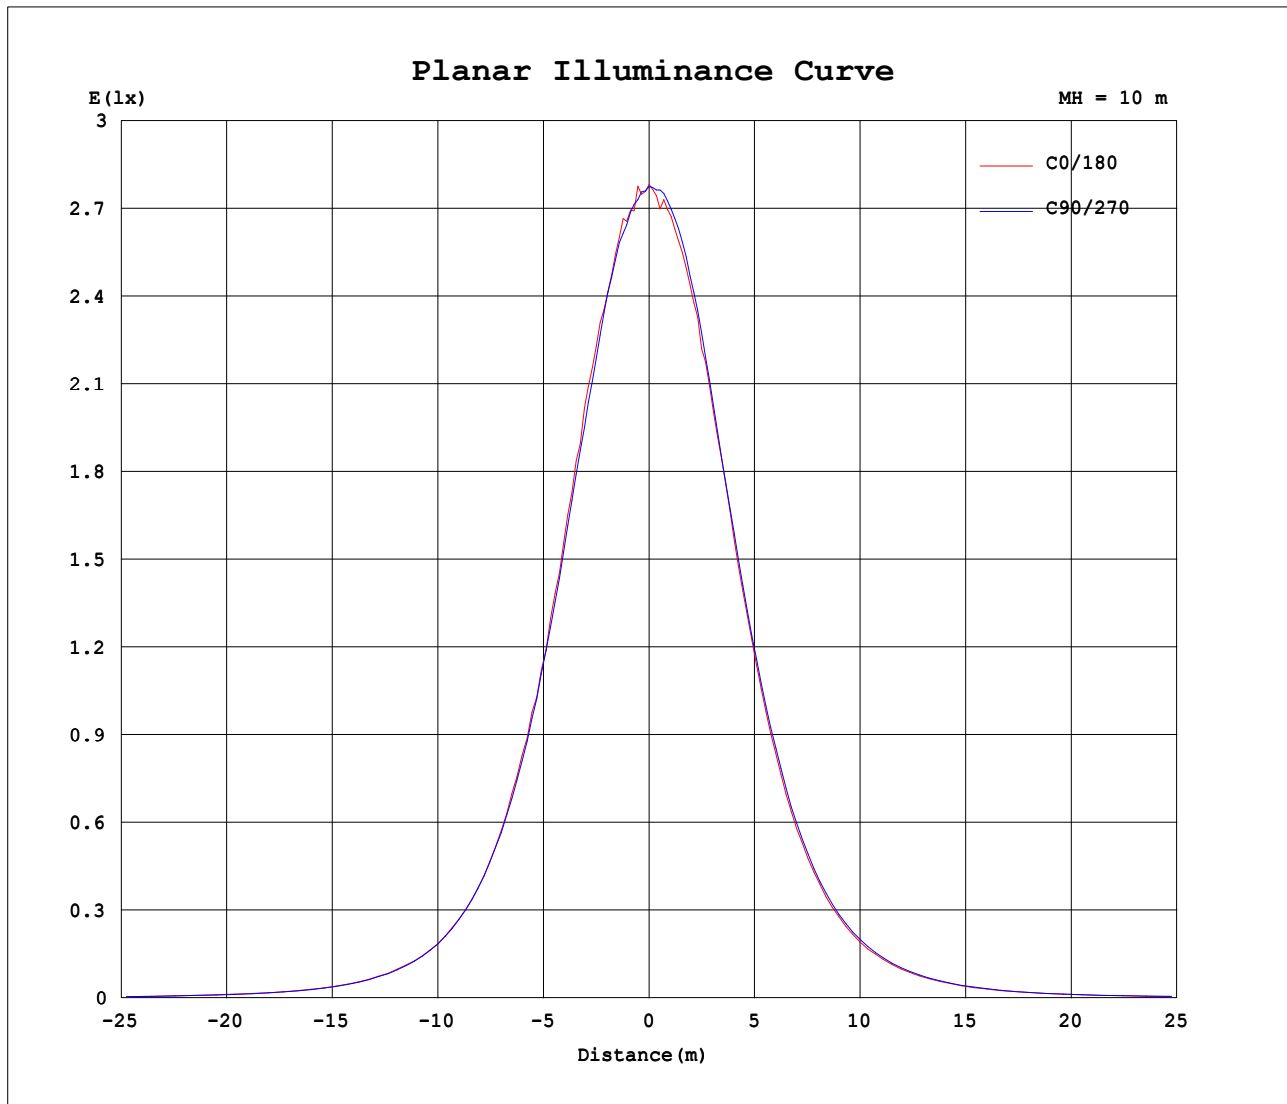


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-12-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.03V I:0.4364A P:3.603W PF:0.6866 Freq:59.98Hz Lamp Flux:325.79lx1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Micro 3.5W 3000K	WEIGHT:
SPEC.:60°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

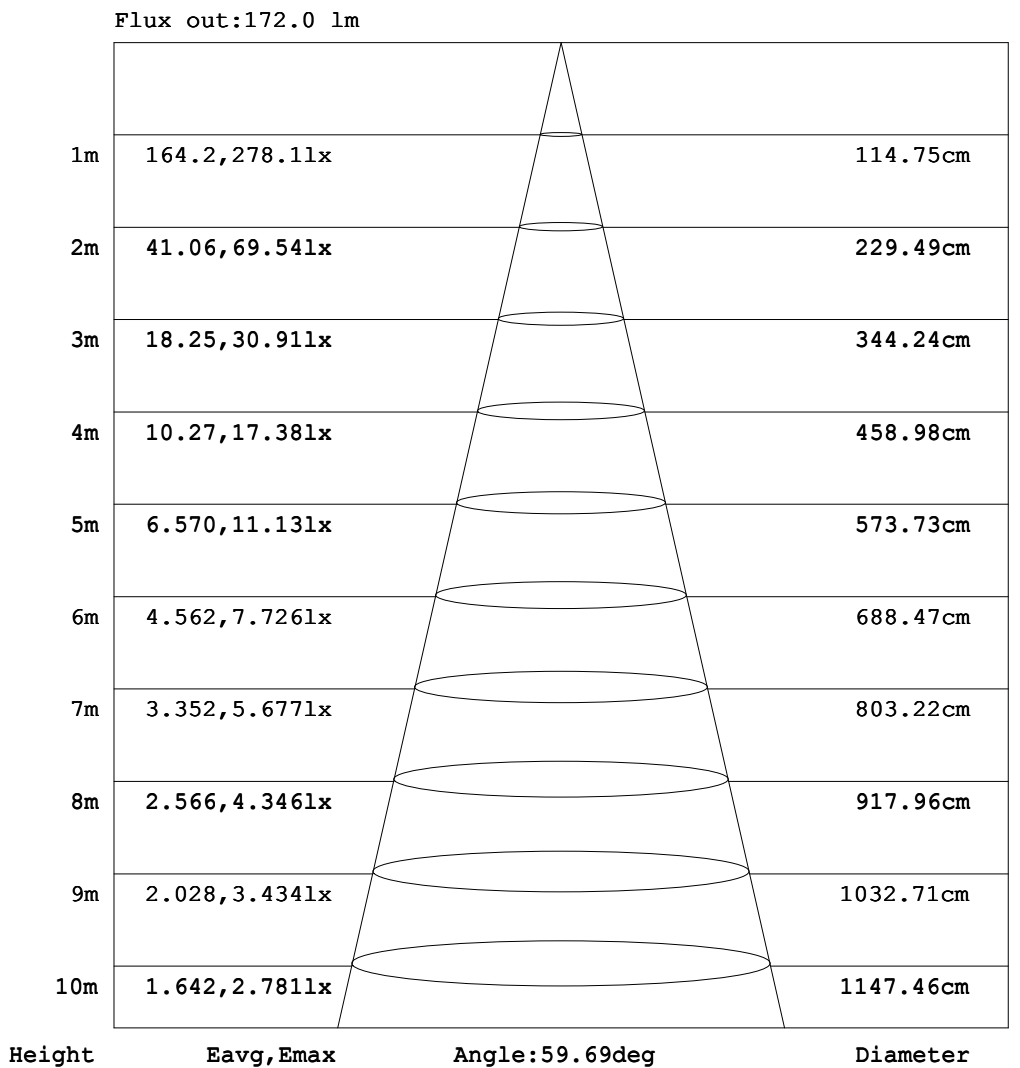

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-12-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.03V I:0.4364A P:3.603W PF:0.6866 Freq:59.98Hz Lamp Flux:325.791x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Micro 3.5W 3000K	WEIGHT:
SPEC.: 60°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.19	0.34	0.57	0.82	1.11	1.39	1.67	1.96	2.22	2.46	2.67	2.76
-170	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.18	0.36	0.57	0.82	1.09	1.37	1.66	1.93	2.19	2.41	2.55	2.64
-160	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.15	0.30	0.49	0.71	0.96	1.21	1.46	1.69	1.90	2.08	2.21	2.30
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.07	0.21	0.36	0.53	0.73	0.93	1.12	1.32	1.48	1.62	1.73	1.79
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.09	0.21	0.32	0.46	0.60	0.74	0.87	0.99	1.10	1.18	1.22
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.07	0.13	0.21	0.29	0.38	0.46	0.53	0.59	0.64	0.67
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.05	0.08	0.11	0.14	0.18	0.21	0.24	0.26
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.16	0.34	0.53	0.72	0.89	1.06	1.20	1.40	1.54	1.63	1.68	1.68
-70	0.00	0.00	0.00	0.02	0.47	1.02	1.86	2.90	3.79	4.60	5.39	6.12	6.78	7.25	7.64	7.97	8.22	8.37	8.40
-60	0.00	0.00	0.00	0.71	1.90	3.53	5.02	6.53	7.76	9.06	10.3	11.6	12.8	13.9	14.9	15.8	16.4	16.8	16.8
-50	0.00	0.00	0.39	1.74	3.90	5.93	7.81	9.75	11.9	14.2	16.9	19.9	23.2	26.6	29.9	32.7	34.7	36.0	36.3
-40	0.00	0.00	0.80	3.10	5.58	7.91	10.5	13.5	17.1	21.6	27.5	34.3	41.7	49.3	57.5	64.8	70.2	73.7	74.8
-30	0.00	0.00	1.21	4.11	7.02	9.69	13.2	17.5	23.5	31.8	42.0	54.4	69.3	85.0	101	115	126	133	135
-20	0.00	0.00	1.64	4.85	7.87	11.2	15.6	21.6	30.6	42.5	58.3	78.1	102	127	151	174	191	202	205
-10	0.00	0.00	1.97	5.35	8.51	12.3	17.4	24.9	35.9	50.7	71.7	98.1	129	161	193	221	241	255	258
0	0.00	0.00	2.09	5.53	8.76	12.7	18.1	26.2	37.7	54.4	76.8	105	139	176	211	241	261	273	278
10	0.00	0.00	1.98	5.37	8.55	12.3	17.4	25.0	36.1	51.1	72.3	98.9	130	163	195	224	246	259	265
20	0.00	0.00	1.66	4.88	7.93	11.3	15.7	21.9	31.1	43.2	59.2	79.5	104	130	155	178	197	208	212
30	0.00	0.00	1.23	4.16	7.09	9.84	13.3	17.8	24.0	32.5	43.2	56.1	71.3	87.7	104	119	132	140	142
40	0.00	0.00	0.82	3.16	5.67	8.06	10.7	13.7	17.5	22.3	28.5	35.6	43.5	51.6	60.2	68.0	74.0	78.1	79.7
50	0.00	0.00	0.41	1.81	4.00	6.06	8.01	10.1	12.2	14.7	17.5	20.8	24.3	28.1	31.5	34.7	37.2	38.8	39.4
60	0.00	0.00	0.00	0.75	2.01	3.67	5.19	6.73	8.07	9.50	10.9	12.1	13.4	14.6	15.8	16.8	17.6	18.1	18.3
70	0.00	0.00	0.00	0.03	0.52	1.10	2.03	3.11	4.02	4.88	5.71	6.47	7.18	7.73	8.22	8.65	9.00	9.22	9.32
80	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.23	0.44	0.65	0.86	1.07	1.29	1.50	1.76	1.97	2.12	2.21	2.25
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.14	0.17	0.21	0.26	0.30	0.30	0.30
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.10	0.19	0.30	0.40	0.49	0.61	0.66	0.76	0.77	0.77
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.14	0.26	0.41	0.56	0.74	0.90	1.05	1.16	1.23	1.33	1.37
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.11	0.24	0.42	0.61	0.83	1.06	1.26	1.49	1.67	1.79	1.87	1.89
170	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.16	0.33	0.52	0.77	1.02	1.28	1.57	1.81	2.04	2.25	2.38	2.43
180	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.19	0.34	0.57	0.82	1.11	1.39	1.67	1.96	2.22	2.46	2.67	2.75

H(β) Range:-90 - 90DEG
 H(β) Interval: 0.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:ADMIN
 Test Date:2022-12-14

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
 Humidity:65.0%
 Test Distance:13.563m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.03V I:0.4364A P:3.603W PF:0.6866 Freq:59.98Hz Lamp Flux:325.791x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Micro 3.5W 3000K	WEIGHT:
SPEC.:60°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	2.73	2.58	2.43	2.23	1.97	1.72	1.43	1.15	0.90	0.60	0.41	0.18	0.04	0.00	0.00	0.00	0.00	0.00	
-170	2.60	2.50	2.34	2.13	1.90	1.65	1.37	1.08	0.82	0.61	0.37	0.17	0.03	0.00	0.00	0.00	0.00	0.00	
-160	2.26	2.17	2.03	1.86	1.66	1.43	1.19	0.94	0.71	0.48	0.30	0.14	0.01	0.00	0.00	0.00	0.00	0.00	
-150	1.76	1.69	1.59	1.45	1.28	1.10	0.92	0.71	0.53	0.35	0.19	0.07	0.00	0.00	0.00	0.00	0.00	0.00	
-140	1.20	1.15	1.07	0.97	0.85	0.72	0.60	0.45	0.32	0.19	0.09	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
-130	0.66	0.63	0.59	0.52	0.46	0.37	0.30	0.20	0.14	0.05	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.25	0.23	0.20	0.18	0.15	0.10	0.06	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	1.67	1.60	1.50	1.35	1.16	1.01	0.86	0.68	0.49	0.30	0.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	8.37	8.22	7.96	7.61	7.19	6.67	5.96	5.21	4.45	3.62	2.73	1.68	0.93	0.41	0.02	0.00	0.00	0.00	
-60	16.7	16.4	15.7	14.8	13.8	12.7	11.5	10.3	9.13	7.69	6.29	4.77	3.32	1.70	0.65	0.00	0.00	0.00	
-50	35.9	34.6	32.5	29.6	26.3	22.8	19.7	16.5	14.0	11.8	9.83	7.72	5.61	3.66	1.55	0.32	0.00	0.00	
-40	73.5	69.9	64.3	57.0	48.9	41.1	33.7	27.0	21.1	16.6	13.2	10.5	7.84	5.24	2.85	0.72	0.00	0.00	
-30	133	126	115	100	83.8	68.3	53.3	41.2	31.3	22.9	16.9	12.9	9.81	6.74	3.83	1.08	0.00	0.00	
-20	202	191	173	149	126	100	76.6	57.0	41.5	29.9	20.9	15.1	11.1	7.77	4.56	1.45	0.00	0.00	
-10	254	241	220	192	159	128	96.2	70.0	49.6	35.0	24.0	16.7	12.0	8.50	4.98	1.72	0.00	0.00	
0	273	259	239	208	174	137	104	74.9	52.5	37.1	25.2	17.2	12.3	8.77	5.13	1.82	0.00	0.00	
10	259	246	222	194	161	129	97.0	70.6	50.0	35.2	24.2	16.8	12.0	8.53	5.00	1.73	0.00	0.00	
20	208	196	178	153	129	102	78.0	57.9	42.3	30.3	21.2	15.2	11.2	7.83	4.59	1.46	0.00	0.00	
30	139	132	119	104	86.4	70.3	54.9	42.4	32.0	23.4	17.2	13.0	9.96	6.81	3.88	1.10	0.00	0.00	
40	78.0	73.7	67.5	59.6	51.2	43.0	35.0	28.0	21.7	17.0	13.4	10.7	7.98	5.32	2.91	0.74	0.00	0.00	
50	38.7	37.0	34.5	31.3	27.8	23.9	20.5	17.2	14.5	12.1	10.2	7.93	5.74	3.75	1.61	0.34	0.00	0.00	
60	18.1	17.5	16.7	15.6	14.5	13.3	12.0	10.9	9.57	8.00	6.50	4.94	3.46	1.81	0.69	0.01	0.00	0.00	
70	9.22	9.00	8.64	8.19	7.67	7.07	6.31	5.52	4.72	3.85	2.94	1.86	1.02	0.46	0.03	0.00	0.00	0.00	
80	2.20	2.09	1.93	1.72	1.46	1.25	1.03	0.83	0.62	0.40	0.19	0.02	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
120	0.01	0.03	0.04	0.03	0.04	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
130	0.32	0.33	0.32	0.27	0.25	0.21	0.13	0.09	0.07	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
140	0.80	0.81	0.74	0.71	0.59	0.52	0.44	0.32	0.21	0.12	0.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
150	1.36	1.31	1.26	1.18	1.05	0.90	0.76	0.58	0.43	0.28	0.14	0.05	0.00	0.00	0.00	0.00	0.00	0.00	
160	1.91	1.88	1.79	1.66	1.46	1.28	1.06	0.84	0.63	0.41	0.25	0.12	0.01	0.00	0.00	0.00	0.00	0.00	
170	2.43	2.34	2.19	2.02	1.81	1.55	1.31	1.03	0.77	0.57	0.35	0.16	0.03	0.00	0.00	0.00	0.00	0.00	
180	2.73	2.58	2.43	2.23	1.97	1.72	1.43	1.15	0.90	0.60	0.41	0.18	0.04	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-12-14

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: