

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		3541.9 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of I _{max} At 50% of I _{max} At 90% of I _{max}	46.8V x 46.7H 29.4V x 31.6H 12.8V x 13.0H
Beam Flux	Total To 10% of I _{max} To 50% of I _{max} To 90% of I _{max}	1000.5 lumens per klm. 873.3 lumens per klm. 601.3 lumens per klm. 130.6 lumens per klm.
	Upward LOR Downward LOR	1.4 % 98.6 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-08-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.08V I:0.9184A P:10.07W PF:0.9085 Freq:59.98Hz Lamp Flux:566.44x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight	WEIGHT:
SPEC.:10W 3000K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWN-LIGHT SHROUD

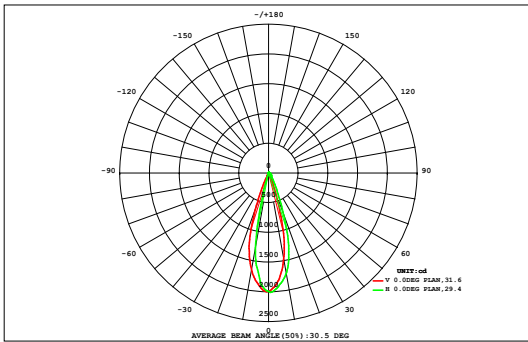

DATA OF LAMP		Eff:56.22lm/W	
MODEL	D6B2-10W-30K-A	Imax (cd)	2006
NOMINAL POWER (W)	10	AVAILABILITY (%)	85.7
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	485.3
NOMINAL FLUX (lm)	566.44	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	566.4
TEST VOLTAGE (V)	12	θ @50% (H, V)	32,29DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.06	0.08	0.12	0.16	0.20	0.26	0.32	0.38	0.43	0.43	0.38	0.32	0.26	0.20	0.16	0.12	0.08	0.06	4.00	0.00
45	0.06	0.08	0.12	0.16	0.20	0.26	0.32	0.38	0.43	0.43	0.38	0.32	0.26	0.20	0.16	0.12	0.08	0.06	4.00	0.00
40	0.07	0.10	0.14	0.19	0.26	0.35	0.45	0.56	0.65	0.65	0.56	0.45	0.35	0.26	0.19	0.14	0.10	0.07	5.51	0.00
35	0.07	0.11	0.16	0.24	0.35	0.50	0.70	0.91	1.09	1.09	0.90	0.69	0.50	0.34	0.23	0.16	0.11	0.07	8.22	0.00
30	0.08	0.12	0.19	0.30	0.49	0.78	1.16	1.60	1.96	1.94	1.56	1.13	0.75	0.47	0.29	0.18	0.12	0.08	13.2	5.68
25	0.08	0.12	0.21	0.38	0.69	1.24	2.12	3.14	3.89	3.79	2.90	1.91	1.14	0.65	0.36	0.20	0.12	0.08	23.0	18.1
20	0.07	0.13	0.24	0.47	1.00	2.23	4.24	6.37	7.69	7.42	5.69	3.51	1.79	0.87	0.43	0.22	0.12	0.07	42.6	38.6
15	0.07	0.12	0.25	0.57	1.54	3.94	7.34	10.1	11.5	11.2	9.16	5.91	2.85	1.13	0.48	0.22	0.11	0.07	66.5	63.2
10	0.06	0.11	0.24	0.65	2.23	5.80	9.77	12.4	13.7	13.5	11.6	8.10	3.94	1.39	0.47	0.20	0.09	0.05	84.2	81.5
5	0.04	0.08	0.20	0.66	2.67	6.90	10.8	13.4	14.7	14.5	12.6	9.08	4.40	1.43	0.39	0.14	0.06	0.04	92.2	89.9
0	0.03	0.06	0.16	0.56	2.43	6.35	10.2	12.9	14.4	14.2	12.1	8.39	3.85	1.19	0.30	0.10	0.05	0.03	87.2	85.2
-5	0.03	0.05	0.12	0.39	1.61	4.37	7.57	10.4	11.8	11.6	9.60	5.89	2.51	0.77	0.22	0.08	0.04	0.02	67.0	64.8
-10	0.02	0.04	0.09	0.23	0.79	2.24	4.18	5.75	6.47	6.21	4.86	2.75	1.16	0.38	0.14	0.06	0.03	0.02	35.4	32.8
-15	0.02	0.03	0.06	0.12	0.30	0.82	1.55	2.00	1.74	1.48	1.32	0.82	0.39	0.17	0.08	0.04	0.03	0.02	11.0	5.56
-20	0.02	0.02	0.04	0.06	0.12	0.23	0.40	0.46	0.24	0.14	0.23	0.19	0.13	0.07	0.04	0.03	0.02	0.02	2.46	0.00
-25	0.01	0.02	0.02	0.03	0.05	0.08	0.09	0.09	0.04	0.02	0.05	0.06	0.05	0.04	0.03	0.02	0.02	0.01	0.73	0.00
-30	0.01	0.01	0.02	0.02	0.03	0.03	0.03	0.03	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.32	0.00
-35	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.19	0.00
-40	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.12	0.00
-45	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.12	0.00
	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)	10	15	20	25	30	35	40	45			
Φ t	0.74	1.22	2.26	5.05	14.8	36.1	60.9	80.3	90.3	88.1	73.5	49.2	24.1	9.40	3.84	1.93	1.13	0.72	544	---
Φ a	0.00	0.00	0.00	0.00	9.39	32.0	57.2	76.8	87.2	85.1	70.2	45.4	19.5	2.51	0.00	0.00	0.00	0.00	---	485


one-half-peak spread: U:12.6,D:16.9 , L:16.4,R:15.4 NEMA Beam Type: Type 4

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-08-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.08V I:0.9184A P:10.07W PF:0.9085 Freq:59.98Hz Lamp Flux:566.44x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight	WEIGHT:
SPEC.:10W 3000K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWN-LIGHT SHROUD

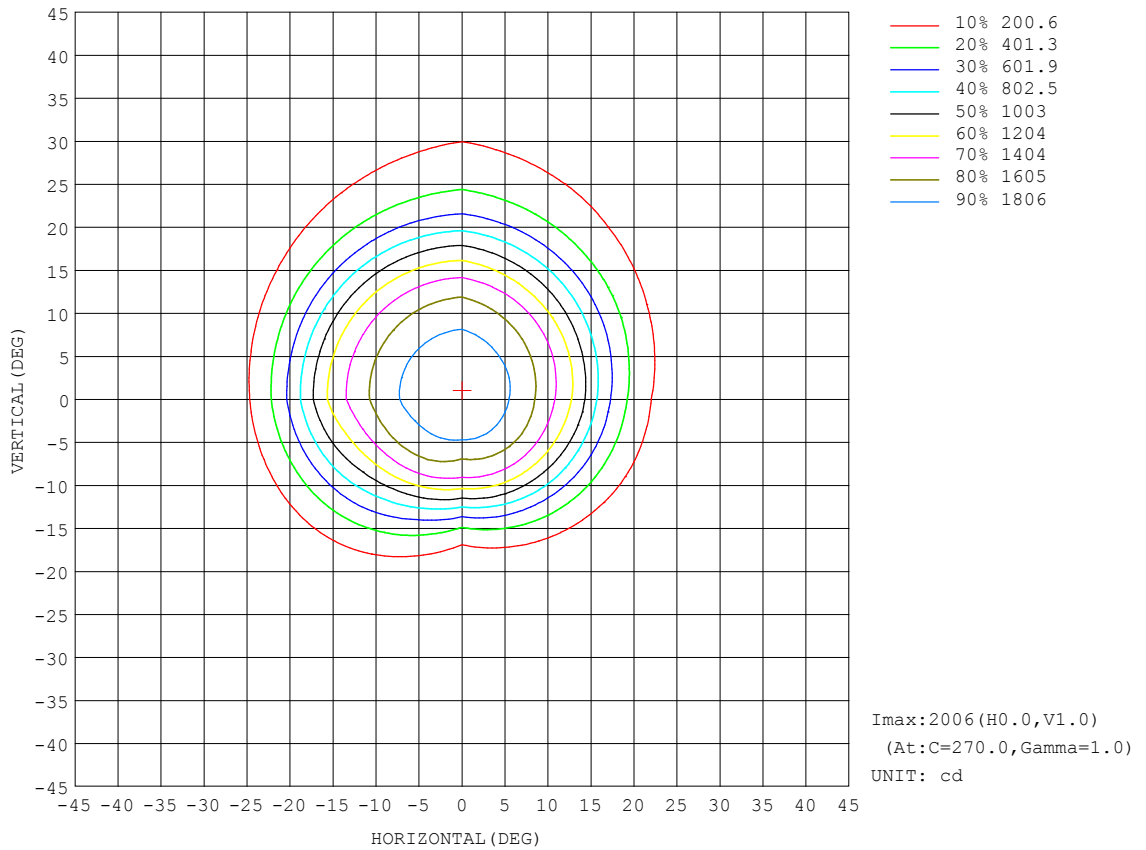


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-08-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.08V I:0.9184A P:10.07W PF:0.9085 Freq:59.98Hz Lamp Flux:566.44x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight	WEIGHT:
SPEC.:10W 3000K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWN-LIGHT SHROUD

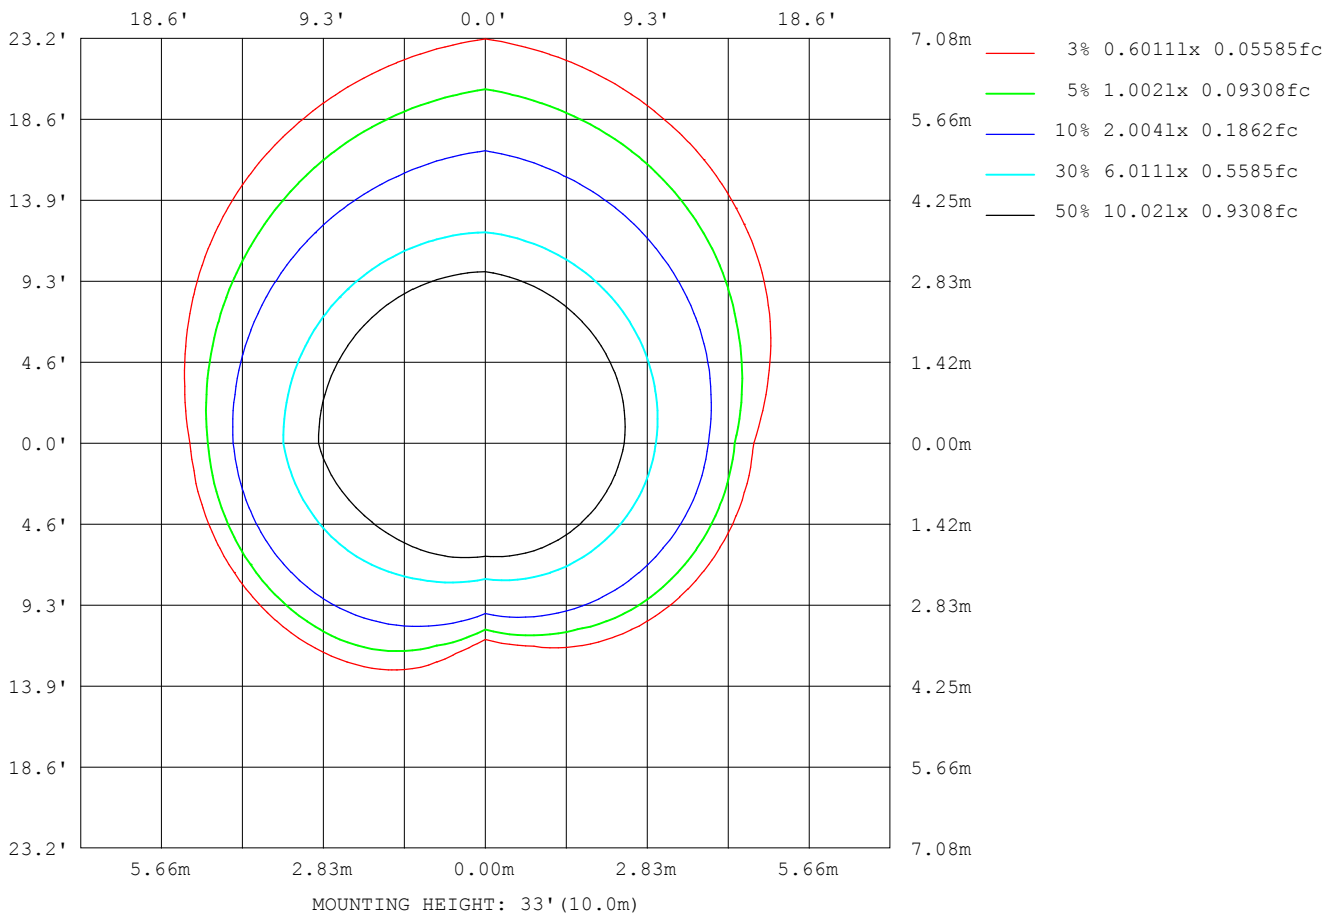

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-08-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

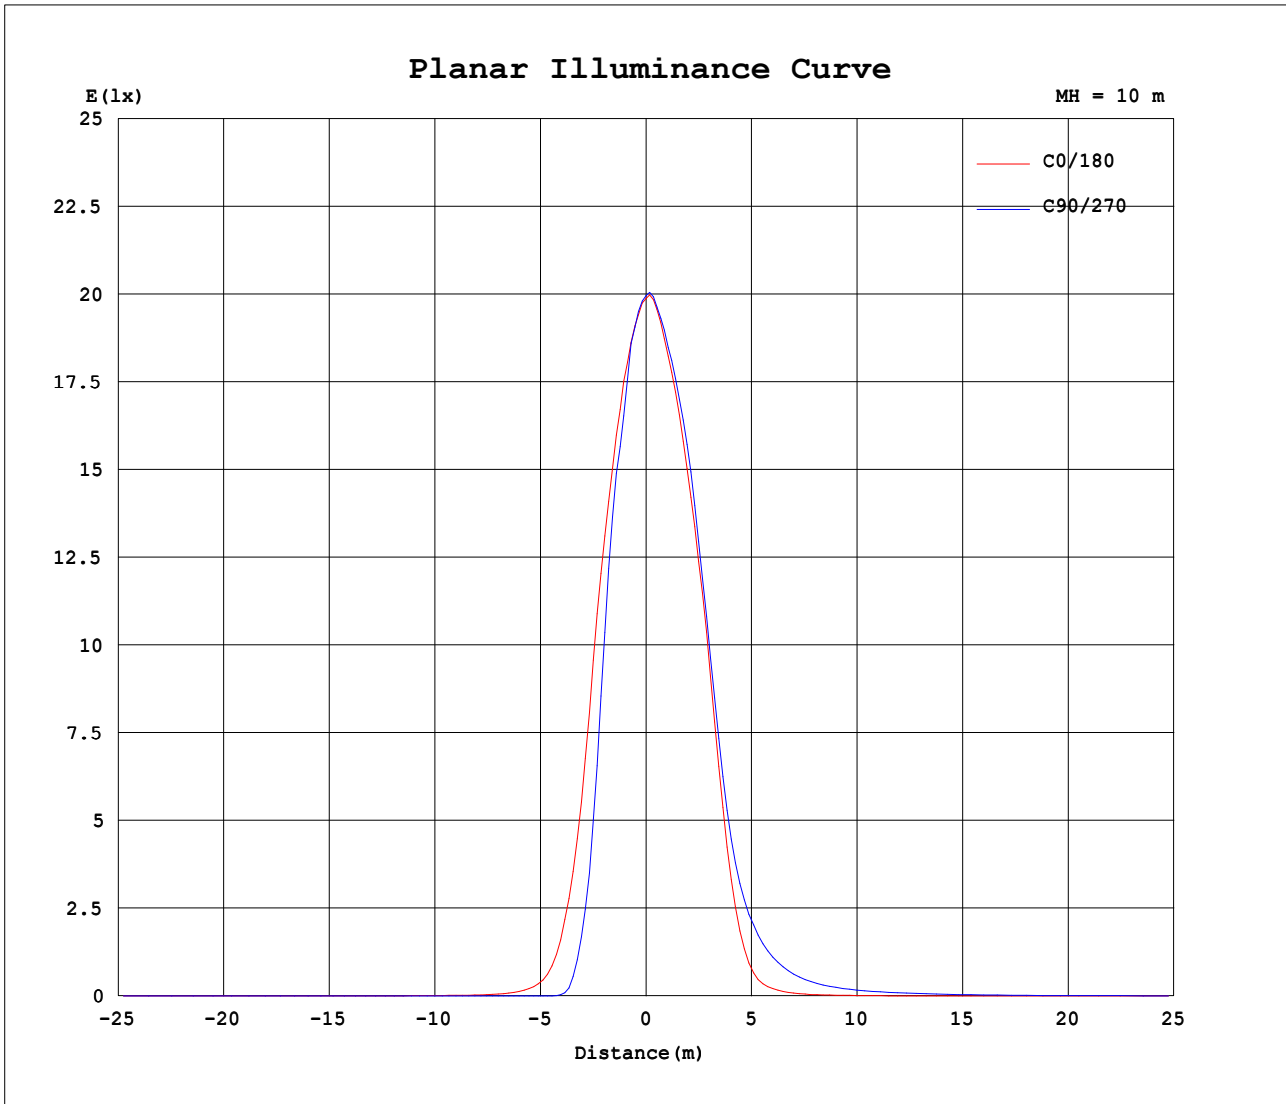


H(β) Range:-90 - 90DEG
 H(β) Interval: 0.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:ADMIN
 Test Date:2022-08-22

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
 Humidity:65.0%
 Test Distance:13.563m [K=1.0000]
 Remarks:

AAI Figure

Test:U:12.08V I:0.9184A P:10.07W PF:0.9085 Freq:59.98Hz Lamp Flux:566.44x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight	WEIGHT:
SPEC.:10W 3000K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWN-LIGHT SHROUD

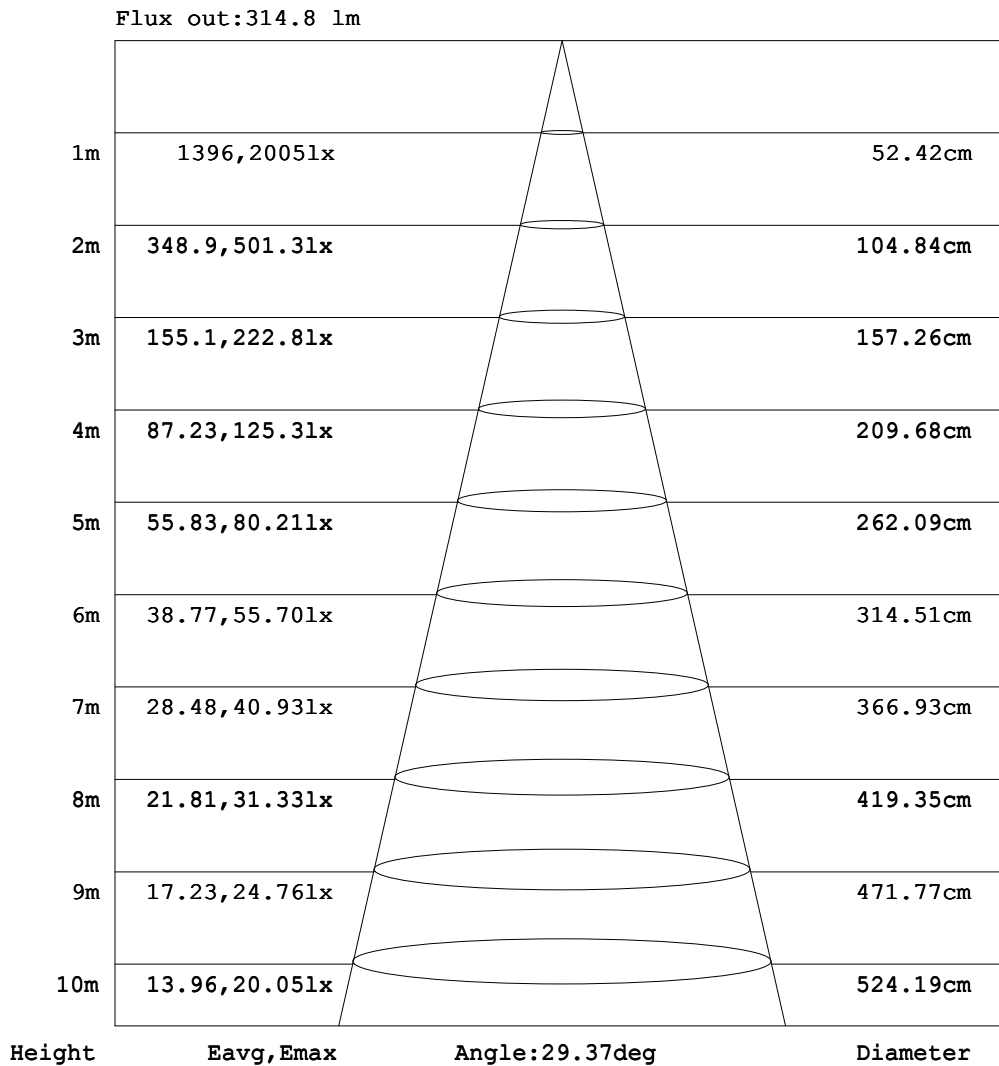

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-08-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.08V I:0.9184A P:10.07W PF:0.9085 Freq:59.98Hz Lamp Flux:566.44x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight	WEIGHT:
SPEC.:10W 3000K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWN-LIGHT SHROUD

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.48	1.29	2.50	3.87	5.04	5.70	5.76	5.73	5.69
-170	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.04	0.10	0.21	0.72	1.59	2.85	4.29	5.63	6.44	6.74	6.75	6.89
-160	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.07	0.14	0.29	0.65	1.37	2.41	3.68	5.02	6.24	7.20	7.85	8.39
-150	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.07	0.14	0.26	0.48	0.87	1.53	2.37	3.33	4.31	5.22	5.99	6.55
-140	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.05	0.09	0.17	0.28	0.47	0.74	1.11	1.59	2.11	2.62	3.05	3.37
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.05	0.09	0.14	0.22	0.31	0.43	0.58	0.74	0.90	1.04	1.15
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.05	0.08	0.11	0.15	0.19	0.22	0.26	0.30	0.33
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.02	0.03	0.04	0.05	0.06
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.05	0.07	0.07	0.08	0.08	0.07	0.06	0.04	0.02	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.12	0.18	0.23	0.26	0.27	0.27	0.27	0.24	0.20	0.14	0.07	0.00
-50	0.00	0.00	0.00	0.00	0.01	0.12	0.22	0.31	0.41	0.51	0.58	0.64	0.68	0.68	0.64	0.55	0.40	0.21	0.00
-40	0.00	0.00	0.00	0.00	0.12	0.24	0.41	0.55	0.75	0.96	1.18	1.40	1.57	1.65	1.63	1.45	1.11	0.61	0.00
-30	0.00	0.00	0.00	0.02	0.20	0.39	0.60	0.88	1.23	1.70	2.22	2.80	3.43	4.27	5.60	6.71	6.67	4.26	0.00
-20	0.00	0.00	0.00	0.10	0.27	0.53	0.81	1.25	1.87	2.69	3.74	5.35	9.22	18.0	35.8	81.3	122	107	28.2
-10	0.00	0.00	0.00	0.13	0.34	0.62	1.02	1.60	2.51	3.74	5.66	10.5	25.2	77.8	283	623	943	1217	1275
0	0.00	0.00	0.00	0.14	0.37	0.70	1.15	1.83	2.95	4.55	7.23	15.3	41.4	181	648	1274	1656	1894	1988
10	0.00	0.03	0.08	0.32	0.74	1.36	2.25	3.57	5.63	8.76	14.1	25.9	56.4	144	435	942	1377	1629	1719
20	0.00	0.05	0.14	0.45	1.01	1.86	3.01	4.70	7.19	10.9	16.6	26.4	45.7	84.5	157	299	496	674	753
30	0.00	0.07	0.19	0.48	1.13	2.06	3.33	5.09	7.49	10.8	15.5	22.2	32.1	47.0	69.8	101	138	174	199
40	0.00	0.09	0.23	0.50	1.11	1.99	3.21	4.76	6.83	9.40	12.8	17.0	22.4	28.9	36.7	45.6	54.9	64.0	70.9
50	0.00	0.10	0.25	0.49	0.93	1.68	2.69	3.95	5.52	7.40	9.67	12.3	15.2	18.5	22.1	25.7	29.4	32.6	35.3
60	0.00	0.11	0.26	0.45	0.75	1.23	1.95	2.82	3.91	5.17	6.58	8.11	9.81	11.6	13.4	15.3	17.0	18.5	19.8
70	0.00	0.12	0.25	0.42	0.62	0.87	1.23	1.69	2.25	2.95	3.70	4.50	5.38	6.29	7.20	8.08	8.92	9.67	10.3
80	0.00	0.12	0.24	0.38	0.53	0.69	0.87	1.06	1.27	1.49	1.73	1.99	2.27	2.55	2.86	3.16	3.44	3.70	3.94
90	0.00	0.11	0.23	0.34	0.46	0.57	0.69	0.80	0.91	1.03	1.14	1.26	1.37	1.49	1.60	1.71	1.83	1.94	2.06
100	0.00	0.11	0.21	0.31	0.40	0.48	0.56	0.63	0.70	0.77	0.83	0.89	0.96	1.03	1.09	1.16	1.23	1.30	1.38
110	0.00	0.10	0.19	0.27	0.33	0.39	0.44	0.48	0.49	0.50	0.49	0.48	0.47	0.47	0.45	0.44	0.45	0.46	0.48
120	0.00	0.09	0.16	0.22	0.27	0.30	0.29	0.27	0.24	0.18	0.12	0.08	0.07	0.05	0.06	0.05	0.05	0.05	0.06
130	0.00	0.08	0.14	0.18	0.20	0.19	0.16	0.10	0.05	0.03	0.03	0.03	0.05	0.03	0.00	0.00	0.00	0.00	0.00
140	0.00	0.06	0.11	0.14	0.13	0.11	0.06	0.03	0.02	0.02	0.02	0.00	0.00	0.00	0.04	0.06	0.06	0.04	0.00
150	0.00	0.05	0.08	0.10	0.08	0.05	0.02	0.01	0.02	0.00	0.00	0.04	0.18	0.34	0.60	0.94	1.24	1.40	1.37
160	0.00	0.03	0.05	0.06	0.05	0.02	0.01	0.01	0.00	0.00	0.08	0.37	0.85	1.63	2.53	3.36	4.00	4.37	4.43
170	0.00	0.02	0.03	0.03	0.02	0.01	0.00	0.01	0.00	0.01	0.31	0.91	1.91	3.12	4.33	5.21	5.60	5.69	5.68
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.48	1.29	2.50	3.87	5.04	5.70	5.76	5.73	5.67

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-08-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.08V I:0.9184A P:10.07W PF:0.9085 Freq:59.98Hz Lamp Flux:566.44x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight	WEIGHT:
SPEC.:10W 3000K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWN-LIGHT SHROUD

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	5.93	6.40	7.16	7.28	6.60	5.30	3.79	2.33	1.16	0.41	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-170	6.99	7.40	7.66	7.45	6.48	5.09	3.57	2.22	1.10	0.38	0.04	0.02	0.01	0.00	0.00	0.00	0.00	0.00
-160	8.22	7.97	7.39	6.49	5.31	4.01	2.73	1.61	0.77	0.25	0.07	0.03	0.01	0.00	0.00	0.00	0.00	0.00
-150	6.29	5.82	5.13	4.31	3.37	2.44	1.56	0.87	0.37	0.14	0.07	0.03	0.01	0.00	0.00	0.00	0.00	0.00
-140	3.21	2.91	2.50	2.00	1.50	1.02	0.61	0.31	0.17	0.09	0.05	0.02	0.01	0.00	0.00	0.00	0.00	0.00
-130	1.07	0.94	0.78	0.61	0.44	0.31	0.22	0.14	0.09	0.05	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00
-120	0.30	0.26	0.22	0.19	0.15	0.11	0.08	0.05	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-110	0.05	0.04	0.03	0.02	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.01	0.01	0.02	0.02	0.02	0.02	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.04	0.07	0.10	0.13	0.15	0.16	0.16	0.16	0.14	0.13	0.10	0.07	0.03	0.00	0.00	0.00	0.00	0.00
-60	0.10	0.19	0.27	0.34	0.38	0.41	0.42	0.41	0.38	0.33	0.27	0.22	0.16	0.08	0.01	0.00	0.00	0.00
-50	0.21	0.41	0.57	0.70	0.77	0.81	0.81	0.78	0.71	0.63	0.52	0.41	0.29	0.19	0.08	0.00	0.00	0.00
-40	0.51	0.94	1.27	1.47	1.55	1.55	1.46	1.32	1.18	1.01	0.83	0.64	0.46	0.29	0.15	0.02	0.00	0.00
-30	2.65	4.14	4.31	3.88	3.34	2.93	2.55	2.18	1.80	1.47	1.18	0.90	0.64	0.41	0.22	0.05	0.00	0.00
-20	62.8	59.7	37.9	20.7	11.1	6.39	4.38	3.37	2.64	2.03	1.55	1.16	0.81	0.51	0.27	0.08	0.00	0.00
-10	1155	784	378	136	40.1	15.6	7.46	4.80	3.49	2.59	1.89	1.38	0.95	0.59	0.31	0.10	0.00	0.00
0	1828	1476	896	335	84.2	25.8	10.4	6.00	4.15	3.00	2.13	1.52	1.03	0.64	0.34	0.11	0.00	0.00
10	1567	1218	696	288	107	46.8	22.9	13.2	8.51	5.71	3.85	2.60	1.68	1.00	0.50	0.17	0.03	0.00
20	629	434	256	142	77.7	42.9	25.4	16.2	10.8	7.35	5.00	3.35	2.14	1.24	0.62	0.22	0.05	0.00
30	172	136	98.8	68.1	46.1	31.6	21.9	15.5	10.9	7.73	5.38	3.63	2.31	1.34	0.68	0.24	0.07	0.00
40	63.9	54.8	45.4	36.5	28.8	22.3	17.1	12.9	9.62	7.08	5.04	3.44	2.21	1.28	0.65	0.24	0.09	0.00
50	32.6	29.4	25.8	22.1	18.6	15.4	12.4	9.87	7.60	5.74	4.16	2.88	1.85	1.10	0.56	0.25	0.10	0.00
60	18.5	17.0	15.3	13.5	11.7	9.95	8.26	6.72	5.32	4.06	2.97	2.08	1.38	0.83	0.46	0.26	0.11	0.00
70	9.69	8.95	8.13	7.26	6.37	5.46	4.60	3.79	3.04	2.38	1.79	1.29	0.90	0.62	0.42	0.25	0.12	0.00
80	3.71	3.45	3.17	2.88	2.57	2.28	2.00	1.74	1.49	1.27	1.06	0.87	0.69	0.53	0.38	0.24	0.12	0.00
90	1.94	1.83	1.71	1.60	1.49	1.37	1.26	1.14	1.03	0.91	0.80	0.69	0.57	0.46	0.34	0.23	0.11	0.00
100	1.30	1.23	1.16	1.09	1.03	0.96	0.89	0.83	0.77	0.70	0.63	0.56	0.48	0.40	0.31	0.21	0.11	0.00
110	0.46	0.45	0.44	0.45	0.47	0.47	0.48	0.49	0.50	0.49	0.48	0.44	0.39	0.33	0.27	0.19	0.10	0.00
120	0.05	0.05	0.05	0.06	0.05	0.07	0.08	0.12	0.18	0.24	0.27	0.29	0.30	0.27	0.22	0.16	0.09	0.00
130	0.03	0.04	0.05	0.04	0.04	0.05	0.03	0.03	0.03	0.05	0.10	0.16	0.19	0.20	0.18	0.14	0.08	0.00
140	0.20	0.36	0.44	0.45	0.39	0.28	0.13	0.04	0.02	0.02	0.03	0.06	0.11	0.13	0.14	0.11	0.06	0.00
150	1.71	1.83	1.76	1.57	1.34	1.08	0.73	0.39	0.12	0.02	0.01	0.02	0.05	0.08	0.10	0.08	0.05	0.00
160	4.74	4.77	4.52	4.00	3.27	2.45	1.72	1.04	0.48	0.11	0.01	0.01	0.02	0.05	0.06	0.05	0.03	0.00
170	5.93	6.26	6.43	6.15	5.31	4.14	2.89	1.82	0.90	0.28	0.01	0.00	0.01	0.02	0.03	0.03	0.02	0.00
180	5.93	6.40	7.16	7.28	6.60	5.30	3.79	2.33	1.16	0.41	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-08-22

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: