

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		7449.9 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	34.7V x 34.9H
	At 50% of Imax	13.6V x 13.6H
	At 90% of Imax	9.9V x 9.9H
Beam Flux	Total	1001.1 lumens per klm.
	To 10% of Imax	753.2 lumens per klm.
	To 50% of Imax	272.3 lumens per klm.
	To 90% of Imax	171.4 lumens per klm.
	Upward LOR	0.7 %
	Downward LOR	99.4 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-10-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.15V I:0.5561A P:4.801W PF:0.7108 Freq:59.98Hz Lamp Flux:74.0854x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Pendant Light	WEIGHT:
SPEC.:5W 3000K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

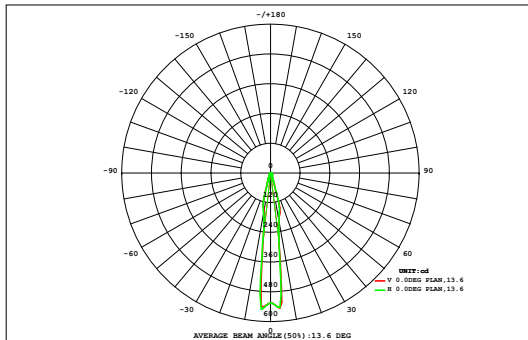

DATA OF LAMP		Eff:15.43lm/W	
MODEL	P3A3-5W-30K-BZ	Imax (cd)	551.9
NOMINAL POWER (W)	5	AVAILABILITY (%)	75.1
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	55.64
NOMINAL FLUX (lm)	74.0854	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	74.09
TEST VOLTAGE (V)	12	θ @50% (H,V)	14,14DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.01	0.01	0.02	0.02	0.03	0.04	0.04	0.05	0.05	0.05	0.05	0.04	0.04	0.03	0.02	0.02	0.02	0.01	0.54	0.00
27	0.01	0.01	0.02	0.02	0.03	0.04	0.04	0.05	0.05	0.05	0.05	0.04	0.04	0.03	0.02	0.02	0.02	0.01	0.78	0.00
24	0.01	0.02	0.02	0.03	0.04	0.05	0.06	0.07	0.07	0.07	0.07	0.06	0.06	0.05	0.03	0.03	0.02	0.01	1.09	0.00
21	0.02	0.02	0.03	0.05	0.06	0.07	0.08	0.10	0.10	0.10	0.10	0.09	0.07	0.06	0.05	0.04	0.02	0.02	1.88	0.94
18	0.02	0.03	0.05	0.06	0.08	0.10	0.14	0.20	0.24	0.25	0.21	0.15	0.10	0.08	0.06	0.05	0.03	0.02	3.30	2.61
15	0.03	0.04	0.06	0.08	0.11	0.19	0.31	0.38	0.42	0.42	0.40	0.34	0.21	0.11	0.08	0.06	0.04	0.03	4.43	3.85
12	0.03	0.05	0.07	0.10	0.18	0.33	0.41	0.46	0.51	0.52	0.49	0.45	0.38	0.21	0.10	0.07	0.05	0.03	5.63	5.12
9	0.04	0.06	0.08	0.13	0.28	0.39	0.46	0.56	0.70	0.71	0.61	0.51	0.45	0.34	0.14	0.08	0.06	0.04	7.99	7.50
6	0.04	0.06	0.09	0.16	0.33	0.41	0.52	0.87	1.31	1.33	0.97	0.60	0.48	0.41	0.20	0.09	0.06	0.04	9.38	8.92
3	0.04	0.06	0.09	0.19	0.34	0.41	0.58	1.25	1.47	1.47	1.36	0.71	0.51	0.43	0.25	0.10	0.07	0.05	9.32	8.86
0	0.04	0.06	0.09	0.18	0.34	0.41	0.56	1.25	1.47	1.47	1.35	0.70	0.50	0.42	0.24	0.10	0.07	0.05	7.70	7.20
-3	0.04	0.06	0.09	0.15	0.32	0.39	0.48	0.83	1.29	1.31	0.92	0.57	0.47	0.39	0.20	0.09	0.06	0.04	5.10	4.58
-6	0.04	0.06	0.08	0.12	0.25	0.36	0.42	0.49	0.59	0.61	0.54	0.47	0.42	0.31	0.14	0.08	0.06	0.04	3.97	3.36
-9	0.03	0.05	0.07	0.09	0.16	0.29	0.37	0.41	0.43	0.44	0.43	0.41	0.34	0.19	0.10	0.07	0.05	0.03	2.88	2.15
-12	0.03	0.04	0.06	0.08	0.10	0.16	0.26	0.33	0.35	0.36	0.35	0.29	0.18	0.11	0.08	0.06	0.04	0.03	1.62	0.54
-15	0.02	0.03	0.05	0.06	0.08	0.10	0.12	0.16	0.19	0.19	0.17	0.13	0.10	0.08	0.06	0.05	0.03	0.02	1.04	0.00
-18	0.02	0.02	0.03	0.05	0.06	0.07	0.08	0.09	0.09	0.09	0.09	0.08	0.07	0.06	0.05	0.03	0.02	0.02	0.76	0.00
-21	0.01	0.02	0.02	0.03	0.04	0.05	0.06	0.07	0.07	0.07	0.07	0.06	0.05	0.04	0.03	0.02	0.02	0.01	0.52	0.00
-24	0.01	0.01	0.02	0.02	0.03	0.03	0.04	0.05	0.05	0.05	0.05	0.04	0.03	0.03	0.02	0.02	0.01	0.01	0.52	0.00
-27	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL (DEG)	6	9	12	15	18	21	24	27			
Φ t	0.48	0.72	1.02	1.60	2.82	3.86	5.00	7.60	9.40	9.53	8.21	5.69	4.46	3.35	1.87	1.06	0.76	0.51	68	---
Φ a	0.00	0.00	0.00	0.53	2.08	3.23	4.45	7.07	8.92	9.05	7.69	5.16	3.86	2.64	0.96	0.00	0.00	0.00	---	56

one-half-peak spread: U:2.6,D:3.0 , L:3.5,R:3.2


NEMA Beam Type: Type 3

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-10-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.15V I:0.5561A P:4.801W PF:0.7108 Freq:59.98Hz Lamp Flux:74.0854x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Pendant Light	WEIGHT:
SPEC.:5W 3000K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

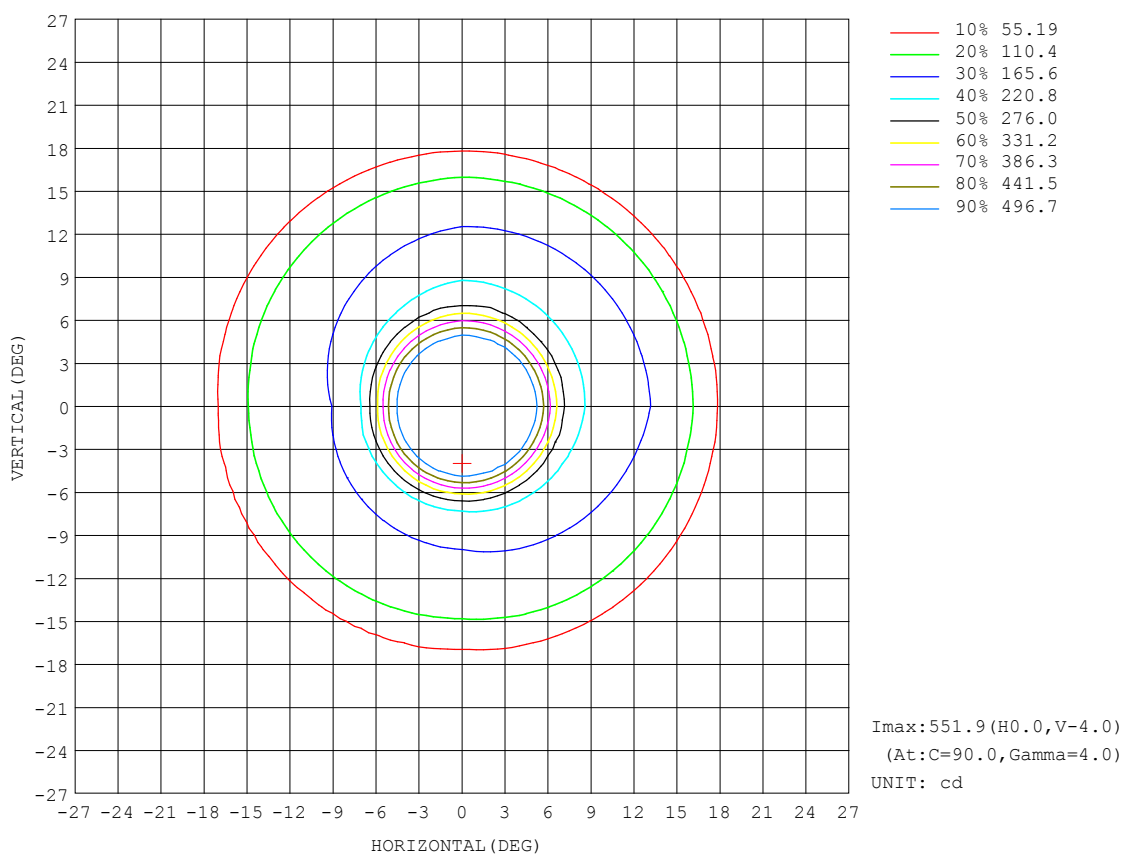


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-10-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.15V I:0.5561A P:4.801W PF:0.7108 Freq:59.98Hz Lamp Flux:74.0854x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Pendant Light	WEIGHT:
SPEC.:5W 3000K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

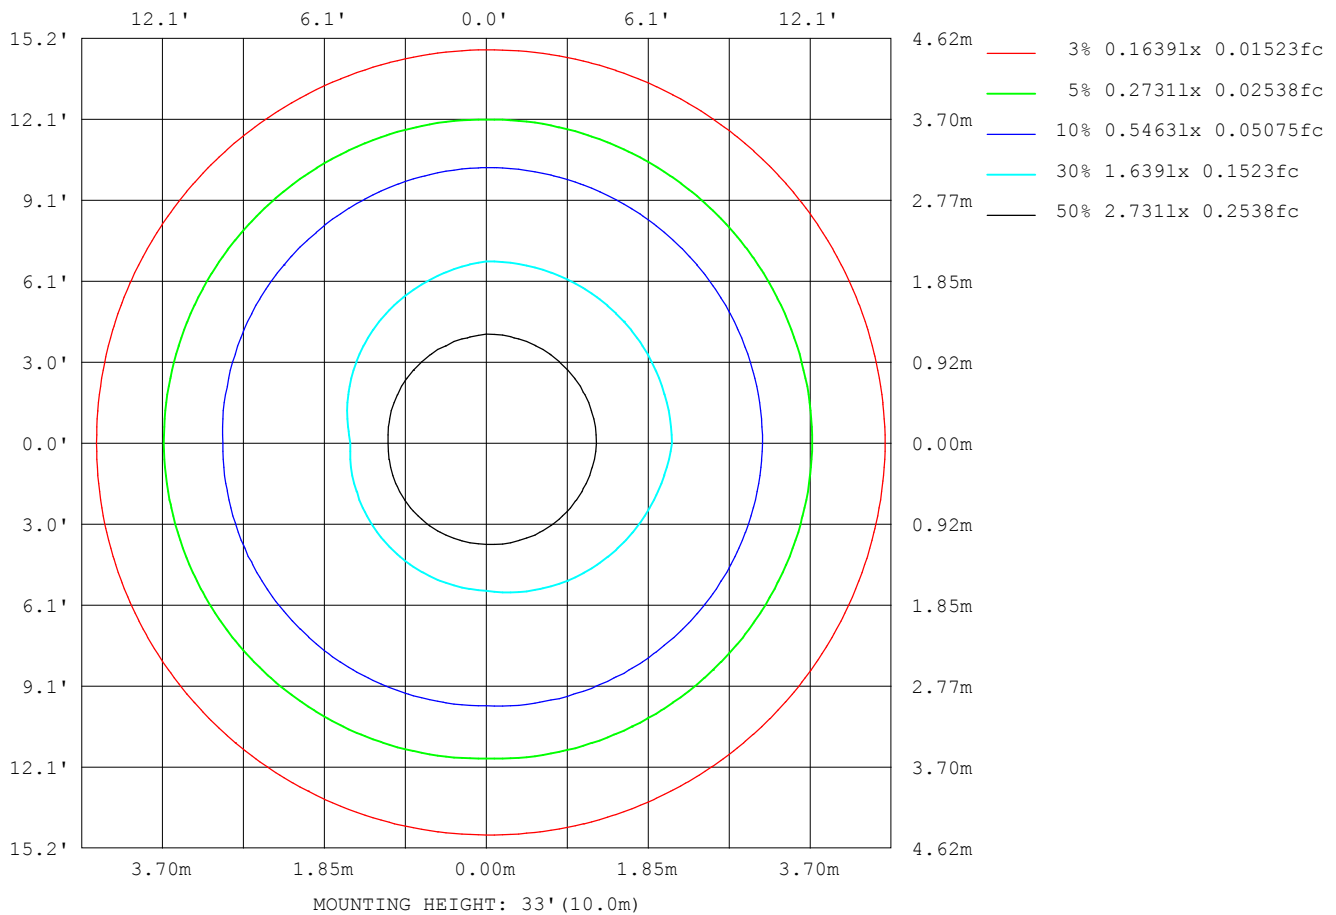

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-10-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

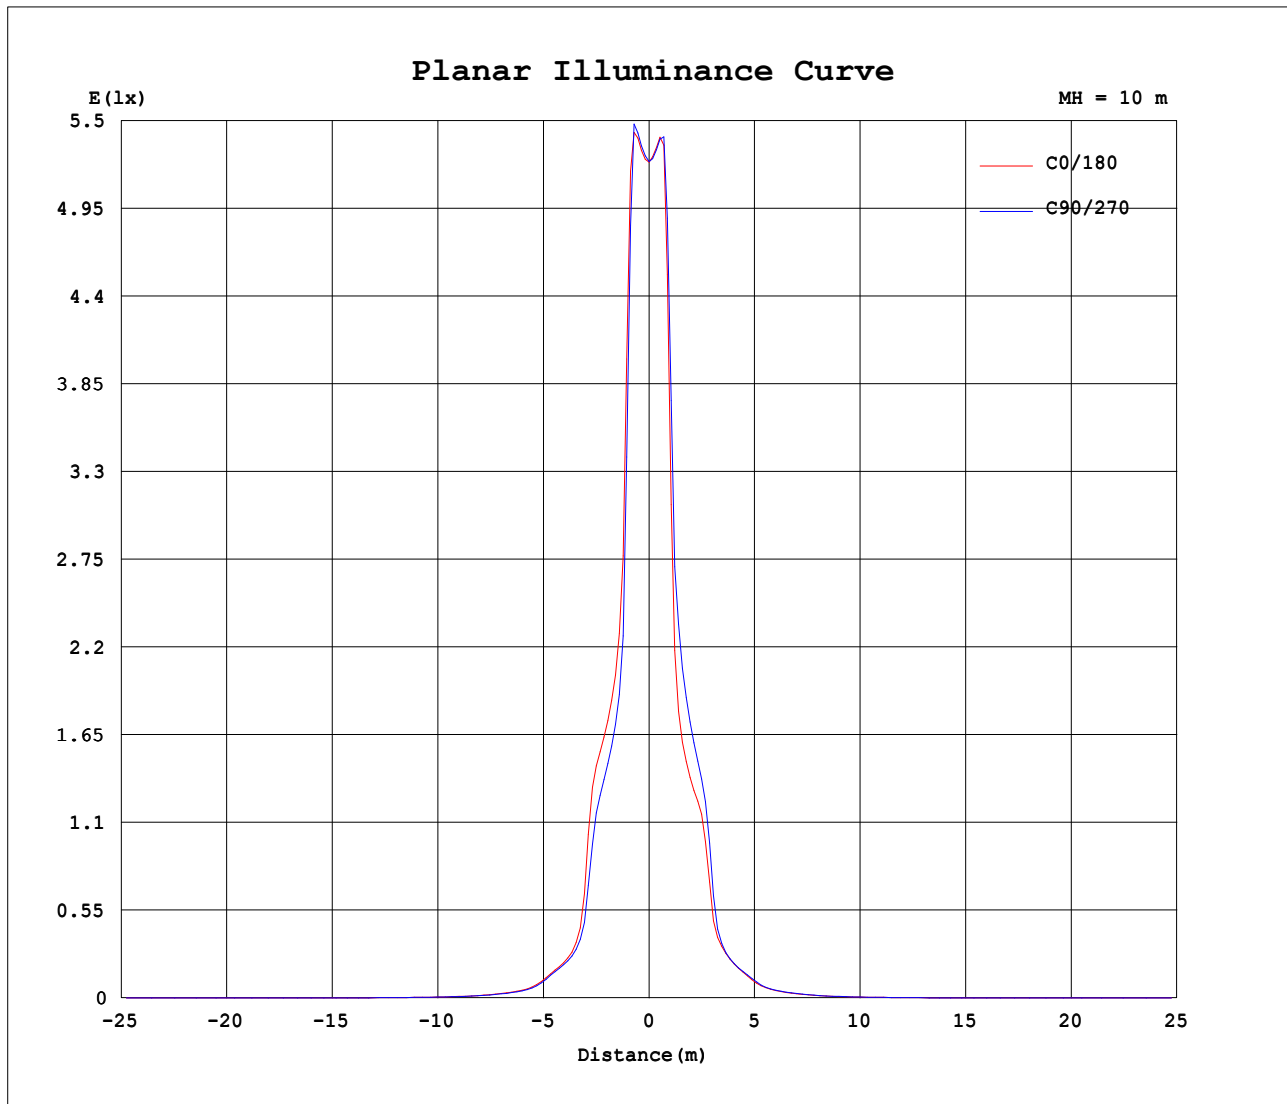


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-10-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.15V I:0.5561A P:4.801W PF:0.7108 Freq:59.98Hz Lamp Flux:74.0854x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Pendant Light	WEIGHT:
SPEC.:5W 3000K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

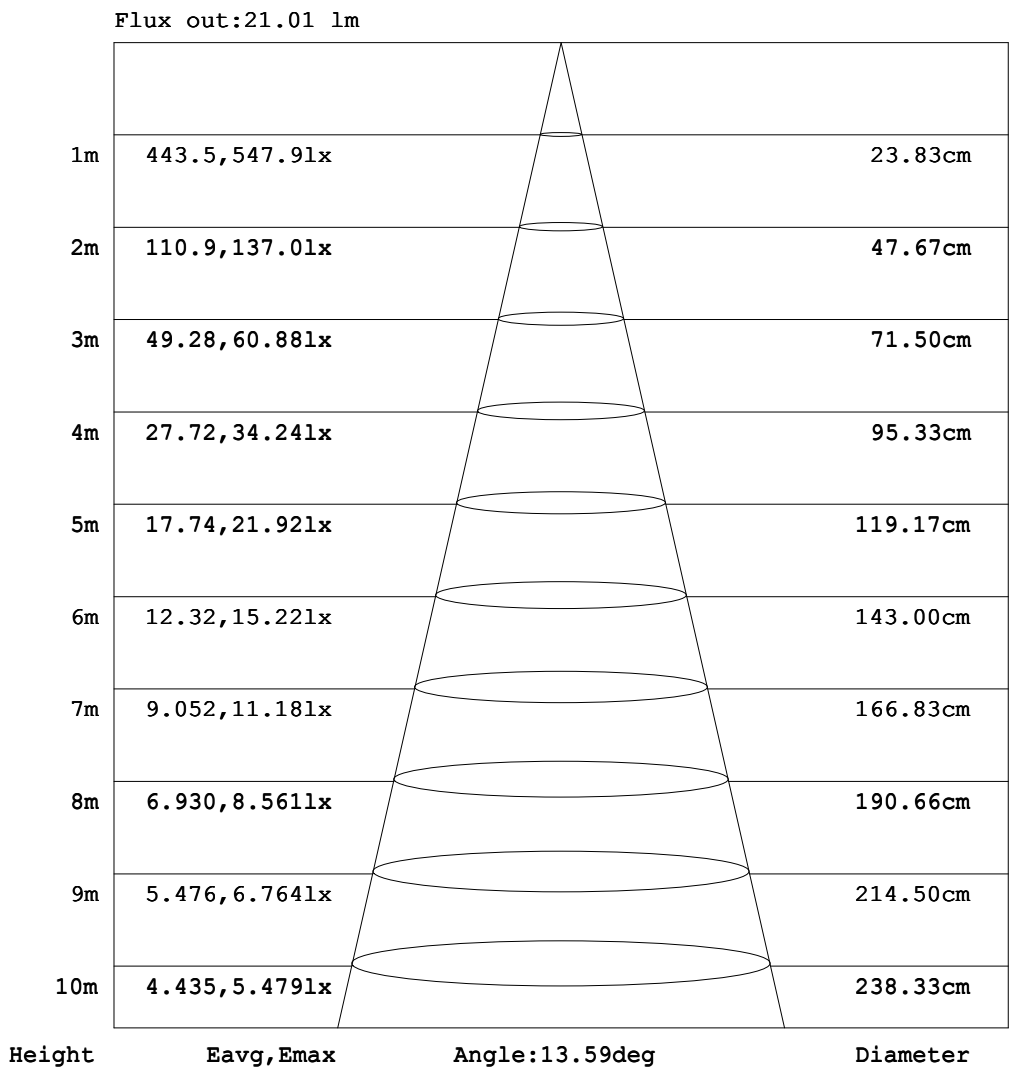

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-10-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.15V I:0.5561A P:4.801W PF:0.7108 Freq:59.98Hz Lamp Flux:74.0854x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Pendant Light	WEIGHT:
SPEC.:5W 3000K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.10	0.38	0.60	0.60	0.46	0.30	0.30
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.09	0.36	0.61	0.68	0.69	0.68	0.72
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.17	0.40	0.58	0.73	0.77	0.80
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.10	0.20	0.32	0.43	0.51
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.13	0.17	0.25	0.28	0.31	0.36	0.40	0.42
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.14	0.25	0.34	0.45	0.56	0.73	0.82	0.95	1.06	1.09
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.17	0.34	0.49	0.76	1.02	1.29	1.64	1.99	2.32	2.61	2.81	2.88
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.15	0.35	0.55	0.86	1.29	1.82	2.52	3.44	4.57	5.75	6.92	7.88	8.23
-20	0.00	0.00	0.00	0.00	0.00	0.08	0.28	0.48	0.81	1.31	1.99	2.99	4.60	6.89	11.3	19.5	25.8	30.2	31.9
-10	0.00	0.00	0.00	0.00	0.00	0.14	0.32	0.59	1.06	1.66	2.62	4.29	7.04	13.8	25.9	44.1	125	151	165
0	0.00	0.00	0.00	0.00	0.00	0.14	0.34	0.63	1.07	1.78	2.90	4.91	8.40	18.8	33.8	109	155	459	524
10	0.00	0.00	0.00	0.00	0.00	0.14	0.32	0.60	1.06	1.67	2.64	4.35	7.13	14.0	26.1	47.0	137	170	197
20	0.00	0.00	0.00	0.00	0.00	0.08	0.28	0.49	0.81	1.32	2.01	3.04	4.74	7.10	11.6	19.7	26.3	31.7	34.1
30	0.00	0.00	0.00	0.00	0.00	0.01	0.16	0.35	0.57	0.88	1.31	1.85	2.58	3.54	4.81	6.09	7.33	8.36	8.78
40	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.17	0.34	0.51	0.77	1.03	1.33	1.68	2.04	2.41	2.72	2.95	3.03
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.13	0.26	0.35	0.48	0.59	0.75	0.86	0.98	1.07	1.13	1.16
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.05	0.13	0.18	0.26	0.31	0.35	0.38	0.40	0.41
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.03	0.03
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.18	0.34	0.47	0.53	0.56
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.26	0.51	0.61	0.61	0.59	0.56
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.10	0.38	0.60	0.60	0.46	0.30	0.30

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-10-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.15V I:0.5561A P:4.801W PF:0.7108 Freq:59.98Hz Lamp Flux:74.0854x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Pendant Light	WEIGHT:
SPEC.:5W 3000K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	0.47	0.73	0.78	0.77	0.65	0.45	0.14	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-170	0.75	0.78	0.79	0.79	0.59	0.33	0.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-160	0.80	0.80	0.70	0.55	0.34	0.14	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-150	0.47	0.38	0.27	0.15	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.41	0.37	0.33	0.30	0.27	0.20	0.15	0.08	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	1.10	1.07	0.97	0.86	0.75	0.60	0.49	0.39	0.28	0.16	0.06	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
-40	2.82	2.63	2.36	2.03	1.68	1.33	1.06	0.79	0.56	0.40	0.23	0.10	0.01	0.00	0.00	0.00	0.00	0.00	
-30	7.93	6.99	5.84	4.67	3.52	2.61	1.90	1.35	0.94	0.63	0.42	0.22	0.06	0.00	0.00	0.00	0.00	0.00	
-20	30.4	26.1	20.2	11.8	7.09	4.76	3.11	2.08	1.38	0.90	0.56	0.34	0.13	0.01	0.00	0.00	0.00	0.00	
-10	162	142	48.8	26.8	14.9	7.32	4.49	2.76	1.75	1.13	0.68	0.41	0.18	0.03	0.00	0.00	0.00	0.00	
0	524	196	147	34.8	20.4	8.91	5.16	3.06	1.92	1.20	0.74	0.44	0.20	0.04	0.00	0.00	0.00	0.00	
10	181	154	51.7	27.0	15.1	7.42	4.55	2.78	1.76	1.13	0.69	0.42	0.18	0.03	0.00	0.00	0.00	0.00	
20	31.9	26.6	20.4	12.1	7.30	4.90	3.16	2.10	1.39	0.91	0.57	0.34	0.13	0.01	0.00	0.00	0.00	0.00	
30	8.42	7.41	6.18	4.91	3.63	2.67	1.93	1.37	0.96	0.64	0.42	0.23	0.07	0.00	0.00	0.00	0.00	0.00	
40	2.96	2.75	2.45	2.08	1.72	1.37	1.06	0.80	0.58	0.41	0.24	0.10	0.01	0.00	0.00	0.00	0.00	0.00	
50	1.14	1.08	1.00	0.89	0.78	0.63	0.52	0.41	0.29	0.16	0.07	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
60	0.41	0.40	0.37	0.32	0.28	0.21	0.14	0.10	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	0.03	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
150	0.05	0.07	0.07	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
160	0.56	0.54	0.45	0.33	0.18	0.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
170	0.66	0.70	0.72	0.68	0.49	0.25	0.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
180	0.47	0.73	0.78	0.77	0.65	0.45	0.14	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-10-09

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: