

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	1958.3 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	68.6V x 71.5H
	At 50% of Imax	39.3V x 39.5H
	At 90% of Imax	17.5V x 17.4H

Beam Flux	Total	1000.3 lumens per klm.
	To 10% of Imax	931.2 lumens per klm.
	To 50% of Imax	533.8 lumens per klm.
	To 90% of Imax	137.4 lumens per klm.

Upward LOR	1.2 %
Downward LOR	98.8 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2020-03-28

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.05V I:0.4424A P:3.615W PF:0.6783 Freq:59.99Hz Lamp Flux:248.322x1 lm		
NAME: LED	TYPE:M4B1-3.5W-30K+LAB031	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

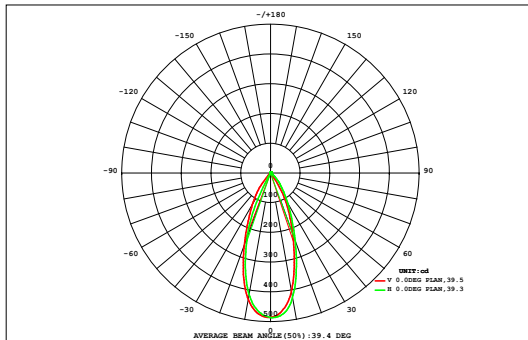

DATA OF LAMP		Eff:68.70lm/W	
MODEL	LAB-068	Imax (cd)	486.3
NOMINAL POWER (W)	3.5	AVAILABILITY (%)	91.3
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	226.8
NOMINAL FLUX (lm)	248.322	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	248.3
TEST VOLTAGE (V)	12	θ @50% (H,V)	40,39DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.16	0.00
72	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.36	0.00
64	0.00	0.00	0.01	0.01	0.03	0.05	0.09	0.15	0.20	0.19	0.14	0.09	0.05	0.02	0.01	0.00	0.00	0.00	1.06	0.00
56	0.00	0.00	0.01	0.02	0.06	0.16	0.32	0.50	0.65	0.64	0.48	0.30	0.14	0.05	0.02	0.01	0.00	0.00	3.37	0.07
48	0.00	0.00	0.01	0.04	0.15	0.40	0.79	1.16	1.37	1.30	0.99	0.63	0.33	0.13	0.04	0.01	0.00	0.00	7.37	4.62
40	0.00	0.01	0.02	0.08	0.31	0.88	1.58	2.20	2.59	2.53	2.00	1.20	0.54	0.22	0.06	0.01	0.00	0.00	14.2	12.5
32	0.00	0.01	0.03	0.13	0.58	1.49	2.56	3.77	4.63	4.54	3.54	2.24	0.97	0.28	0.08	0.02	0.00	0.00	24.9	23.7
24	0.00	0.01	0.03	0.17	0.89	2.05	3.70	5.84	7.35	7.20	5.43	3.28	1.55	0.35	0.08	0.02	0.00	0.00	37.9	37.0
	0.00	0.01	0.03	0.19	1.08	2.42	4.59	7.35	9.04	8.90	6.79	3.96	1.89	0.39	0.06	0.01	0.00	0.00	46.7	46.0
	0.00	0.00	0.02	0.16	1.02	2.30	4.56	7.32	8.95	8.81	6.76	3.92	1.77	0.32	0.03	0.01	0.00	0.00	46.0	45.3
	0.00	0.00	0.02	0.11	0.72	1.68	3.51	5.75	7.22	7.07	5.34	3.08	1.18	0.17	0.02	0.01	0.00	0.00	35.9	35.1
-24	0.00	0.00	0.01	0.06	0.36	0.99	1.85	3.37	4.37	4.27	3.14	1.53	0.46	0.06	0.01	0.00	0.00	0.00	20.5	19.4
-32	0.00	0.00	0.01	0.03	0.11	0.42	0.72	0.95	1.17	1.11	0.76	0.35	0.09	0.02	0.01	0.00	0.00	0.00	5.75	3.01
-40	0.00	0.00	0.00	0.01	0.03	0.09	0.20	0.24	0.13	0.06	0.06	0.04	0.02	0.01	0.00	0.00	0.00	0.00	0.90	0.00
-48	0.00	0.00	0.00	0.00	0.01	0.02	0.03	0.03	0.01	0.00	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.14	0.00
-56	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.00
-64	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00
-72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)	16	24	32	40	48	56	64	72			
Φ t	0.02	0.06	0.21	1.04	5.37	13.0	24.6	38.7	47.8	46.7	35.5	20.7	9.01	2.05	0.45	0.11	0.03	0.01	245	---
Φ a	0.00	0.00	0.00	0.00	3.20	11.3	22.9	37.1	46.5	45.5	34.0	19.0	7.06	0.17	0.00	0.00	0.00	0.00	---	227


one-half-peak spread: U:20.5,D:19.1 , L:21.1,R:18.1NEMA Beam Type: Type 5 x 4 (H x V)

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2020-03-28

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.05V I:0.4424A P:3.615W PF:0.6783 Freq:59.99Hz Lamp Flux:248.322x1 lm		
NAME: LED	TYPE:M4B1-3.5W-30K+LAB031	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

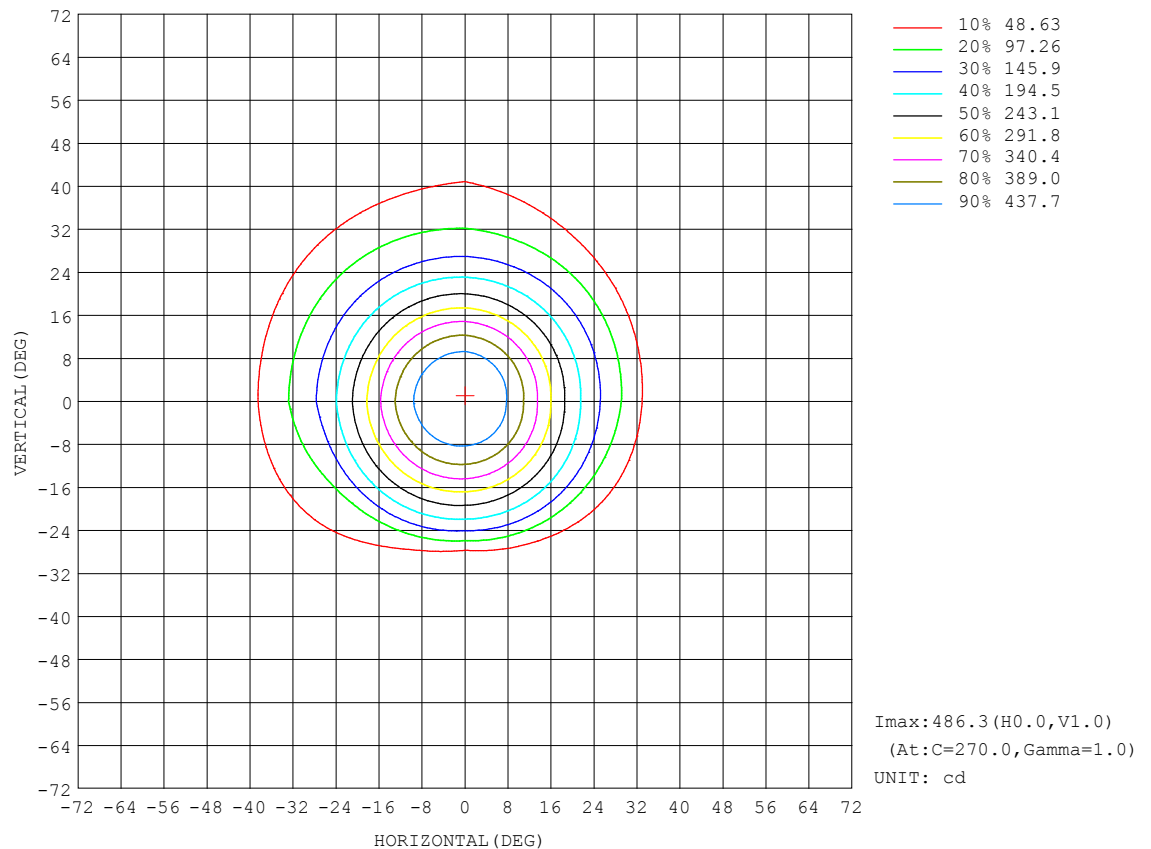


H(β) Range:-90 - 90DEG
 H(β) Interval: 0.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:ADMIN
 Test Date:2020-03-28

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
 Humidity:65.0%
 Test Distance:13.563m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM


Test:U:12.05V I:0.4424A P:3.615W PF:0.6783 Freq:59.99Hz Lamp Flux:248.322x1 lm		
NAME: LED	TYPE:M4B1-3.5W-30K+LAB031	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

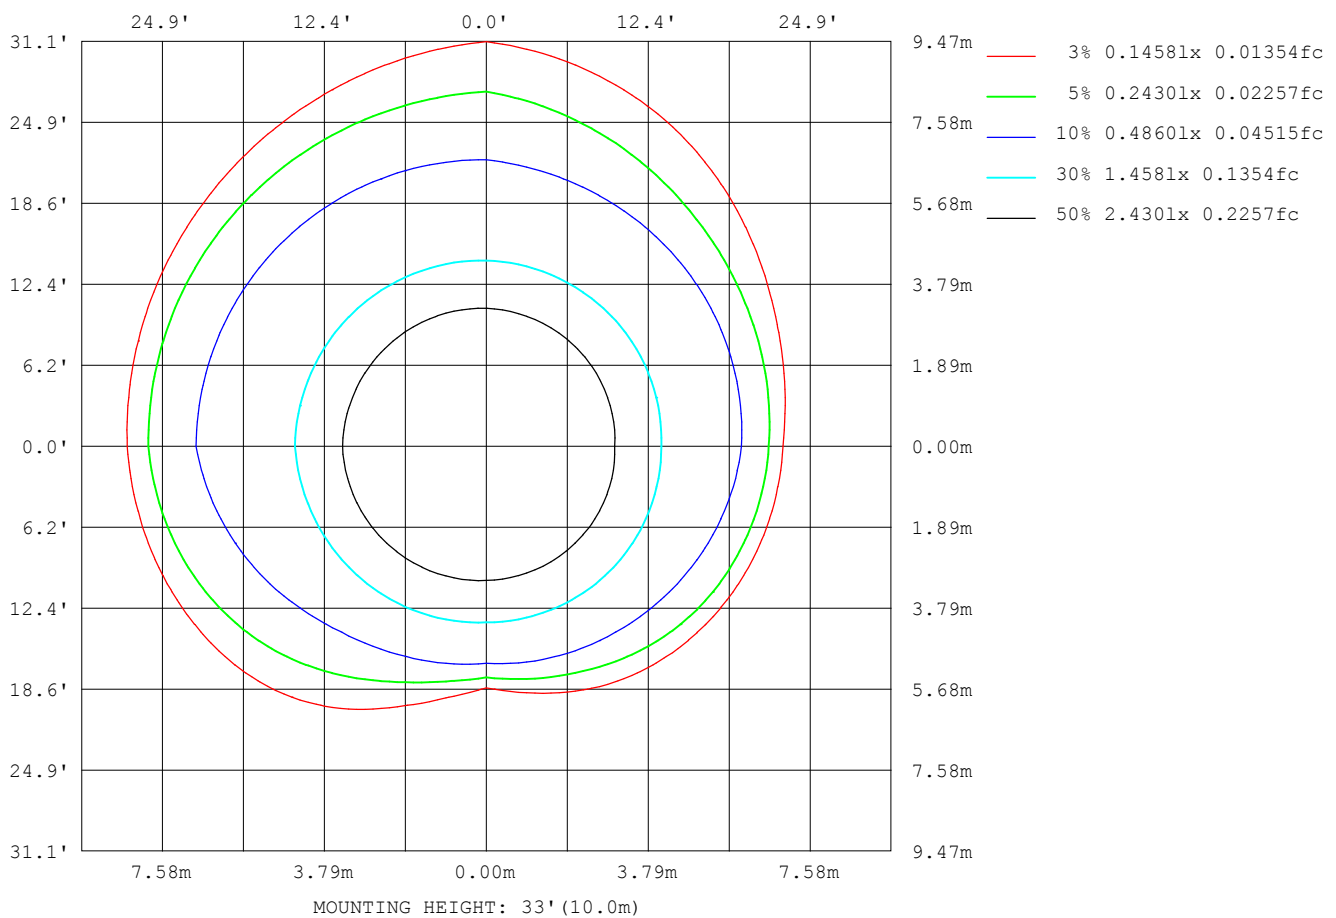

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2020-03-28

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

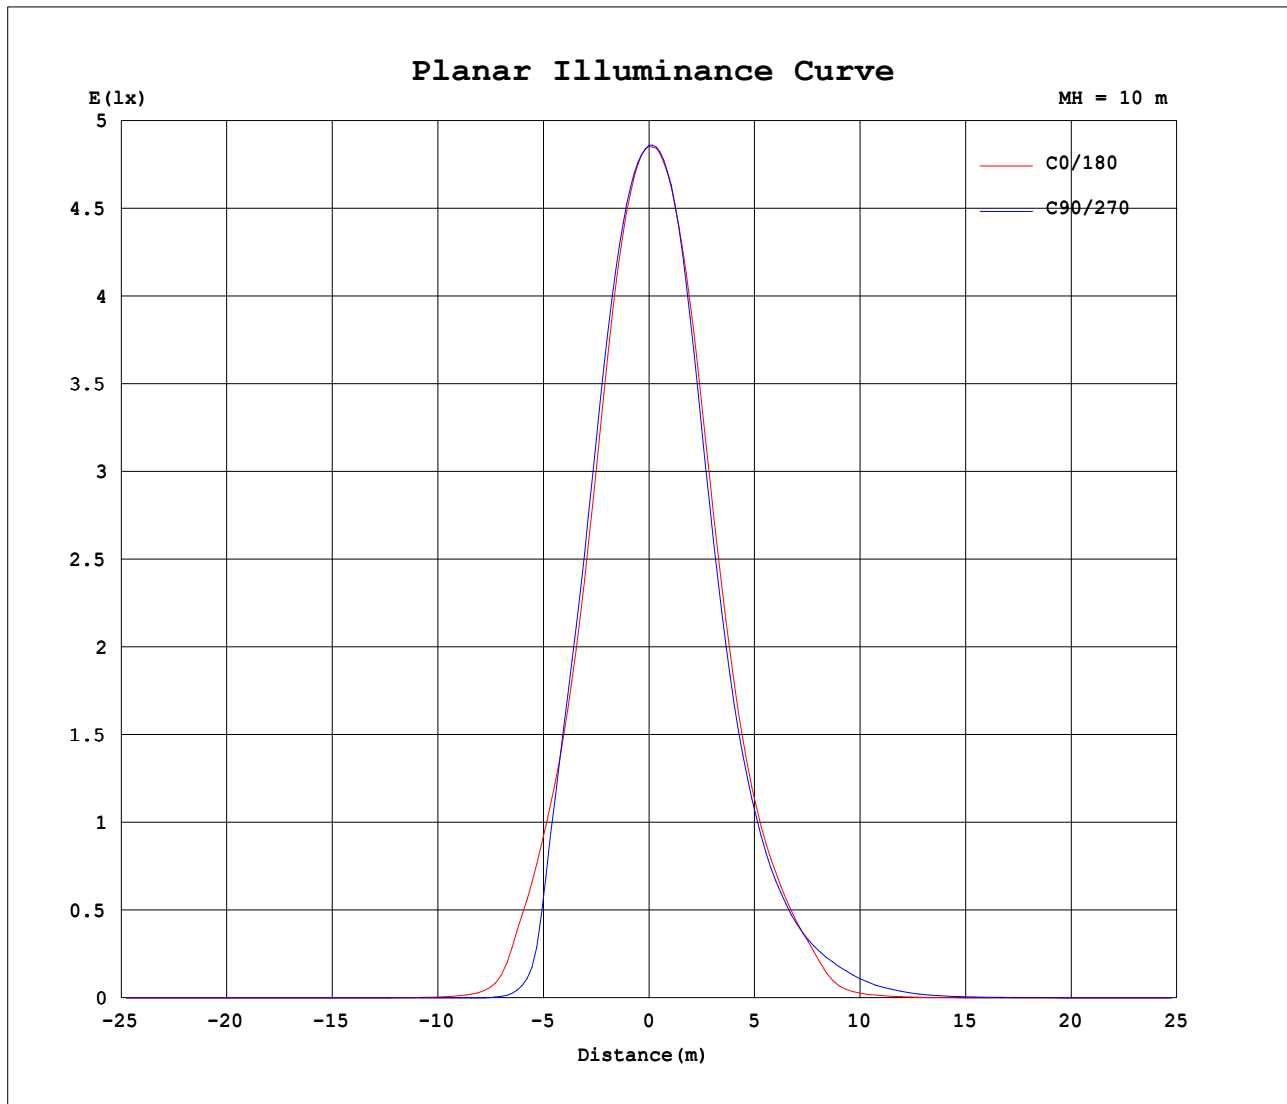


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2020-03-28

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.05V I:0.4424A P:3.615W PF:0.6783 Freq:59.99Hz Lamp Flux:248.322x1 lm		
NAME: LED	TYPE:M4B1-3.5W-30K+LAB031	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

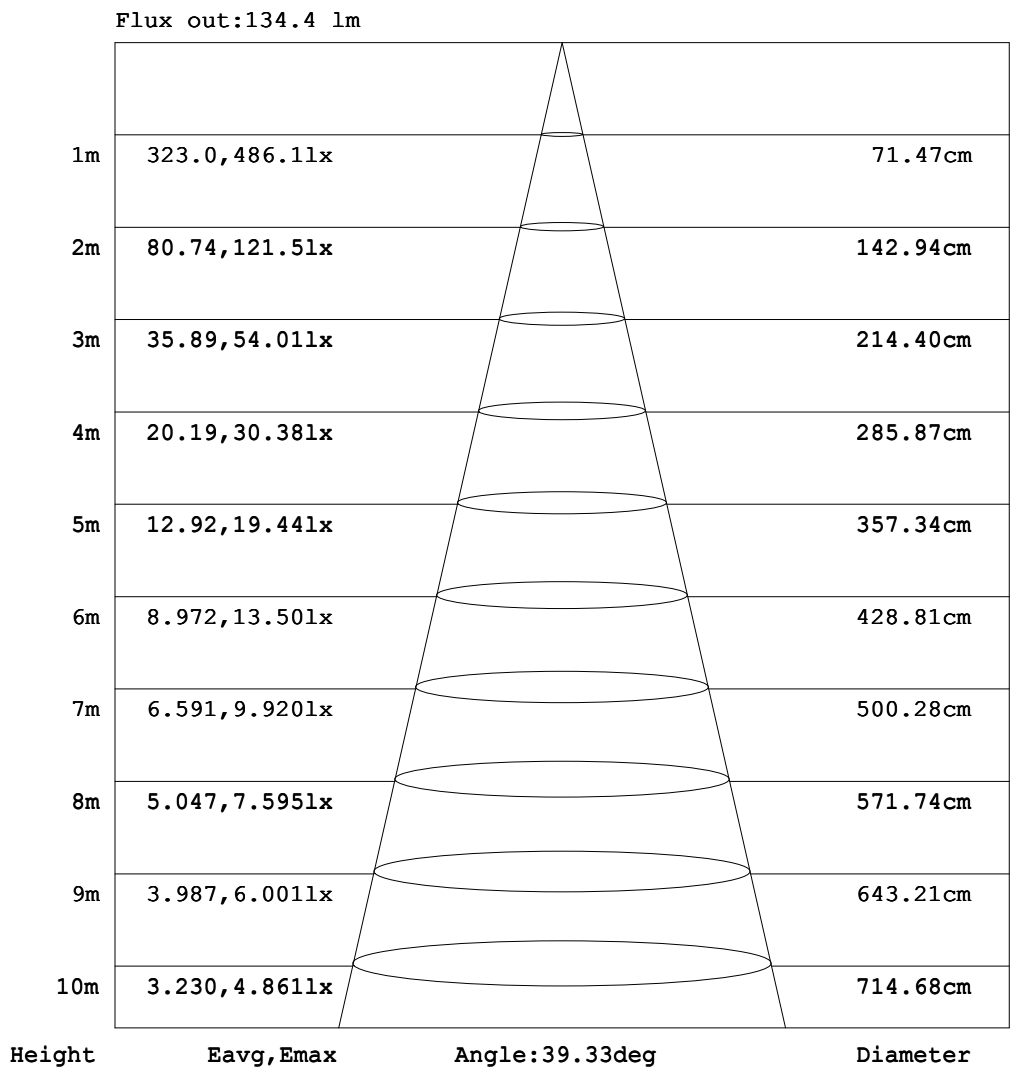

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
 H(β) Interval: 0.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:ADMIN
 Test Date:2020-03-28

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
 Humidity:65.0%
 Test Distance:13.563m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.05V I:0.4424A P:3.615W PF:0.6783 Freq:59.99Hz Lamp Flux:248.322x1 lm		
NAME: LED	TYPE:M4B1-3.5W-30K+LAB031	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.31	0.66	1.05	1.47	1.93	2.34	2.69	2.99	3.21
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.10	0.35	0.70	1.11	1.55	2.01	2.42	2.79	3.07
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.05	0.11	0.28	0.57	0.92	1.31	1.69	2.08	2.41	2.69
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.10	0.18	0.34	0.58	0.86	1.16	1.44	1.68	1.89	2.04
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.09	0.18	0.28	0.41	0.59	0.75	0.91	1.04	1.13
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.09	0.14	0.21	0.28	0.34	0.39	0.43
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.03
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.03	0.04	0.04	0.03	0.02	0.02	0.01	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.06	0.08	0.08	0.10	0.12	0.11	0.10	0.09	0.08	0.06	0.03
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.10	0.12	0.18	0.19	0.24	0.29	0.34	0.38	0.44	0.45	0.36	0.20
-40	0.00	0.00	0.00	0.00	0.03	0.11	0.16	0.22	0.31	0.45	0.67	1.23	1.84	2.54	3.32	4.00	4.01	2.63	0.03
-30	0.00	0.00	0.00	0.00	0.09	0.15	0.24	0.37	0.61	1.29	2.60	5.06	11.4	24.5	30.8	32.2	31.1	26.7	17.4
-20	0.00	0.00	0.00	0.02	0.12	0.22	0.33	0.58	1.29	3.17	7.63	25.7	49.8	68.1	94.4	152	198	225	232
-10	0.00	0.00	0.00	0.03	0.13	0.26	0.42	0.83	2.30	5.88	20.5	58.6	90.7	137	211	287	358	404	416
0	0.00	0.00	0.00	0.03	0.13	0.28	0.48	0.98	2.91	7.98	32.6	79.2	123	179	260	353	433	476	485
10	0.00	0.00	0.01	0.04	0.16	0.33	0.59	1.22	3.49	8.92	26.7	69.2	108	154	216	291	362	410	426
20	0.00	0.01	0.02	0.06	0.19	0.34	0.60	1.17	2.75	7.25	16.4	41.1	74.4	105	138	175	210	235	243
30	0.00	0.01	0.02	0.05	0.18	0.29	0.52	0.96	1.79	4.04	9.17	17.6	32.5	55.2	74.2	90.5	104	112	114
40	0.00	0.01	0.03	0.06	0.13	0.27	0.41	0.67	1.15	1.91	3.35	6.83	12.1	18.8	27.2	36.0	43.7	49.1	51.8
50	0.00	0.01	0.03	0.06	0.10	0.20	0.32	0.44	0.66	0.98	1.50	2.16	3.08	4.39	6.32	8.84	11.4	13.5	14.9
60	0.00	0.01	0.03	0.06	0.09	0.14	0.21	0.31	0.42	0.52	0.66	0.85	1.09	1.39	1.74	2.08	2.39	2.65	2.85
70	0.00	0.01	0.03	0.05	0.08	0.11	0.15	0.19	0.25	0.31	0.37	0.45	0.53	0.60	0.67	0.74	0.80	0.85	0.90
80	0.00	0.01	0.02	0.04	0.06	0.08	0.10	0.13	0.16	0.19	0.22	0.26	0.29	0.32	0.36	0.39	0.43	0.46	0.49
90	0.00	0.01	0.02	0.03	0.04	0.05	0.06	0.07	0.09	0.10	0.11	0.12	0.13	0.14	0.15	0.16	0.17	0.18	0.19
100	0.00	0.01	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.01	0.01	0.00	0.00
110	0.00	0.01	0.01	0.02	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.05	0.08	0.11	0.10
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.14	0.31	0.51	0.68	0.82	0.89	0.91
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.27	0.56	0.86	1.16	1.45	1.67	1.82	1.84
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.22	0.54	0.90	1.30	1.70	2.06	2.35	2.52	2.57
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.31	0.66	1.05	1.47	1.93	2.34	2.69	2.99	3.20

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2020-03-28

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.05V I:0.4424A P:3.615W PF:0.6783 Freq:59.99Hz Lamp Flux:248.322x1 lm		
NAME: LED	TYPE:M4B1-3.5W-30K+LAB031	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	3.21	3.12	2.97	2.71	2.33	1.90	1.46	1.01	0.61	0.29	0.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-170	3.21	3.09	2.91	2.60	2.21	1.79	1.35	0.92	0.60	0.28	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-160	2.81	2.66	2.44	2.14	1.80	1.45	1.07	0.72	0.42	0.18	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-150	1.98	1.86	1.69	1.47	1.21	0.94	0.68	0.43	0.22	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-140	1.10	1.02	0.91	0.78	0.63	0.46	0.31	0.16	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-130	0.41	0.38	0.32	0.25	0.18	0.09	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.01	0.02	0.02	0.02	0.02	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	0.05	0.09	0.12	0.13	0.12	0.10	0.09	0.07	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-40	0.44	0.70	0.79	0.74	0.58	0.45	0.32	0.22	0.14	0.09	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-30	22.6	22.4	17.0	8.74	3.99	2.07	1.16	0.64	0.36	0.19	0.11	0.04	0.00	0.00	0.00	0.00	0.00	0.00	
-20	218	187	138	78.3	44.0	13.5	4.03	1.71	0.77	0.37	0.18	0.08	0.00	0.00	0.00	0.00	0.00	0.00	
-10	394	337	260	185	113	58.1	13.0	3.59	1.35	0.59	0.26	0.12	0.02	0.00	0.00	0.00	0.00	0.00	
0	464	404	311	218	148	86.7	23.6	5.17	1.85	0.75	0.32	0.14	0.03	0.00	0.00	0.00	0.00	0.00	
10	400	341	263	190	130	75.3	23.6	9.81	4.39	1.78	0.65	0.29	0.09	0.04	0.02	0.01	0.00	0.00	
20	229	199	162	122	81.1	38.1	19.4	10.5	4.85	1.83	0.77	0.36	0.12	0.07	0.04	0.02	0.01	0.00	
30	108	95.1	75.2	52.1	34.7	23.1	13.8	7.20	3.11	1.37	0.70	0.32	0.15	0.09	0.05	0.02	0.01	0.00	
40	46.9	40.4	32.8	24.6	16.9	10.7	5.92	2.90	1.61	0.93	0.49	0.25	0.16	0.10	0.06	0.03	0.01	0.00	
50	13.4	11.1	8.51	6.01	4.13	2.85	1.96	1.33	0.83	0.49	0.32	0.22	0.15	0.10	0.06	0.03	0.01	0.00	
60	2.63	2.35	2.02	1.67	1.31	1.00	0.73	0.56	0.43	0.33	0.25	0.19	0.14	0.09	0.06	0.03	0.01	0.00	
70	0.84	0.78	0.71	0.64	0.56	0.49	0.42	0.36	0.30	0.25	0.19	0.15	0.11	0.08	0.05	0.03	0.01	0.00	
80	0.46	0.43	0.39	0.36	0.32	0.29	0.26	0.22	0.19	0.16	0.13	0.10	0.08	0.06	0.04	0.02	0.01	0.00	
90	0.18	0.17	0.16	0.15	0.14	0.13	0.12	0.11	0.10	0.09	0.07	0.06	0.05	0.04	0.03	0.02	0.01	0.00	
100	0.00	0.00	0.01	0.01	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.01	0.00	
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.02	0.01	0.01	
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.00	
130	0.02	0.04	0.05	0.04	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.00	
140	0.17	0.19	0.20	0.23	0.23	0.18	0.13	0.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
150	0.98	1.00	0.94	0.83	0.66	0.49	0.38	0.25	0.12	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
160	1.94	1.92	1.81	1.61	1.36	1.08	0.77	0.52	0.31	0.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
170	2.66	2.65	2.54	2.29	1.96	1.58	1.19	0.79	0.52	0.25	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
180	3.21	3.12	2.97	2.71	2.33	1.90	1.46	1.01	0.61	0.29	0.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2020-03-28

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: