Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity		**894.5 cd per klm.**
(Luminaire orientation as tested.)		**0.0 degrees vertical**
		0.0 degrees horizontal
Beam Spread	**At 10% of Imax**	**104.4V x 104.3H**
	At 50% of Imax	**58.8V x 59.2H**
	At 90% of Imax	**24.1V x 24.6H**
Beam Flux	**Total**	**1000.1 lumens per klm.**
	To 10% of Imax	**895.8 lumens per klm.**
	To 50% of Imax	**534.3 lumens per klm.**
	To 90% of Imax	**121.7 lumens per klm.**
	Upward LOR	**1.0 %**
	Downward LOR	**99.0 %**
Luminaire Efficiency(Light Output Ratio)		**100.0 %**

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.12V I:0.4750A P:3.634W PF:0.6313 Freq:59.97Hz Lamp Flux:317.513x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Micro 3.5W 2700K	WEIGHT:
SPEC.:60°lens	DIM.:	SERIAL No.:3
MFR.: EVERFINE	SUR.:	Shielding Angle:

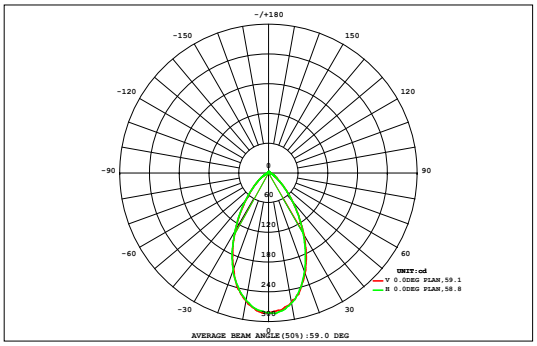

DATA OF LAMP		Eff:87.38lm/W	
MODEL M4B1-3.5W-27K-60-A		Imax(cd)	284.0
NOMINAL POWER(W)	3.5	AVAILABILITY(%)	89.3
RATED VOLTAGE(V)	12	Avai. FLUX(lm)	283.6
NOMINAL FLUX(lm)	317.513	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	317.5
TEST VOLTAGE(V)	12	θ @50%(H,V)	59,59DEG

AREA FLUX DIAGRAM UNIT:lm

VERTICAL(DEG)	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL(DEG) 20	30	40	50	60	70	80	90	Φ t	Φ a
90	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.00
80	0.00	0.00	0.00	0.02	0.05	0.08	0.11	0.13	0.15	0.15	0.14	0.11	0.08	0.05	0.02	0.01	0.00	0.00	1.09	0.00
70	0.00	0.00	0.02	0.07	0.13	0.19	0.25	0.30	0.33	0.33	0.30	0.26	0.20	0.14	0.08	0.03	0.00	0.00	2.63	0.00
60	0.00	0.01	0.05	0.12	0.21	0.33	0.47	0.61	0.70	0.71	0.62	0.48	0.34	0.22	0.13	0.06	0.01	0.00	5.07	0.57
50	0.00	0.02	0.08	0.17	0.32	0.58	0.95	1.32	1.57	1.58	1.34	0.98	0.61	0.34	0.18	0.08	0.02	0.00	10.1	7.72
40	0.00	0.02	0.10	0.22	0.50	1.02	1.76	2.58	3.13	3.15	2.63	1.82	1.06	0.53	0.24	0.10	0.03	0.00	18.9	17.4
30	0.00	0.03	0.11	0.29	0.72	1.58	2.89	4.27	5.19	5.22	4.35	2.98	1.65	0.77	0.31	0.12	0.03	0.00	30.5	29.4
20	0.00	0.03	0.13	0.35	0.93	2.14	3.97	5.90	7.15	7.18	6.01	4.11	2.25	1.00	0.38	0.14	0.04	0.00	41.7	40.7
10	0.00	0.04	0.13	0.38	1.06	2.48	4.63	6.86	8.22	8.24	6.99	4.83	2.62	1.14	0.42	0.15	0.04	0.00	48.2	47.3
0	0.00	0.04	0.13	0.38	1.06	2.48	4.62	6.83	8.14	8.16	6.96	4.81	2.62	1.14	0.42	0.15	0.04	0.00	48.0	47.0
-10	0.00	0.03	0.13	0.35	0.93	2.12	3.94	5.85	7.03	7.07	5.97	4.08	2.23	0.99	0.38	0.14	0.04	0.00	41.3	40.2
-20	0.00	0.03	0.11	0.29	0.71	1.55	2.84	4.20	5.10	5.13	4.28	2.93	1.63	0.76	0.31	0.12	0.03	0.00	30.0	28.8
-30	0.00	0.02	0.10	0.22	0.49	0.99	1.72	2.51	3.04	3.05	2.56	1.77	1.03	0.52	0.24	0.10	0.03	0.00	18.4	16.9
-40	0.00	0.02	0.07	0.17	0.32	0.57	0.91	1.26	1.49	1.50	1.29	0.94	0.59	0.33	0.18	0.08	0.02	0.00	9.74	7.22
-50	0.00	0.01	0.05	0.12	0.20	0.32	0.45	0.58	0.67	0.67	0.60	0.47	0.33	0.22	0.13	0.06	0.01	0.00	4.87	0.39
-60	0.00	0.00	0.02	0.07	0.12	0.18	0.24	0.29	0.31	0.31	0.29	0.25	0.19	0.13	0.07	0.03	0.00	0.00	2.51	0.00
-70	0.00	0.00	0.00	0.02	0.04	0.07	0.10	0.12	0.13	0.13	0.12	0.10	0.08	0.05	0.02	0.01	0.00	0.00	0.98	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.00
-90																				
Φ t	0.01	0.30	1.24	3.23	7.79	16.7	29.9	43.6	52.4	52.6	44.5	30.9	17.5	8.31	3.51	1.37	0.36	0.01	314	---
Φ a	0.00	0.00	0.00	0.18	5.26	14.5	27.8	41.7	50.4	50.7	42.5	28.9	15.4	5.86	0.40	0.00	0.00	0.00	---	284

one-half-peak spread: U:32.3,D:27.0 , L:27.2,R:18.3 NEMA Beam Type: Type 6

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-03-20

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.12V I:0.4750A P:3.634W PF:0.6313 Freq:59.97Hz Lamp Flux:317.513x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Micro 3.5W 2700K	WEIGHT:
SPEC.:60°lens	DIM.:	SERIAL No.:3
MFR.: EVERFINE	SUR.:	Shielding Angle:

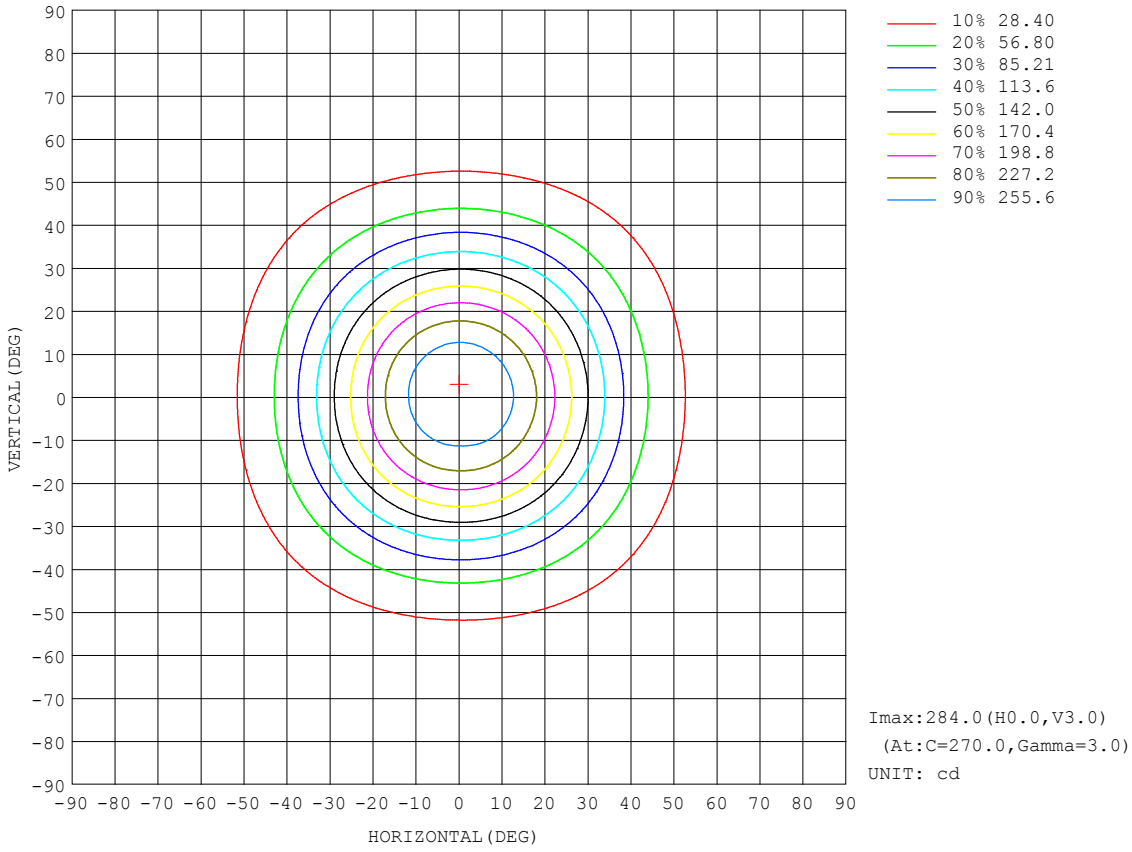

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-03-20

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:12.12V I:0.4750A P:3.634W PF:0.6313 Freq:59.97Hz Lamp Flux:317.513x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Micro 3.5W 2700K	WEIGHT:
SPEC.:60°lens	DIM.:	SERIAL No.:3
MFR.: EVERFINE	SUR.:	Shielding Angle:

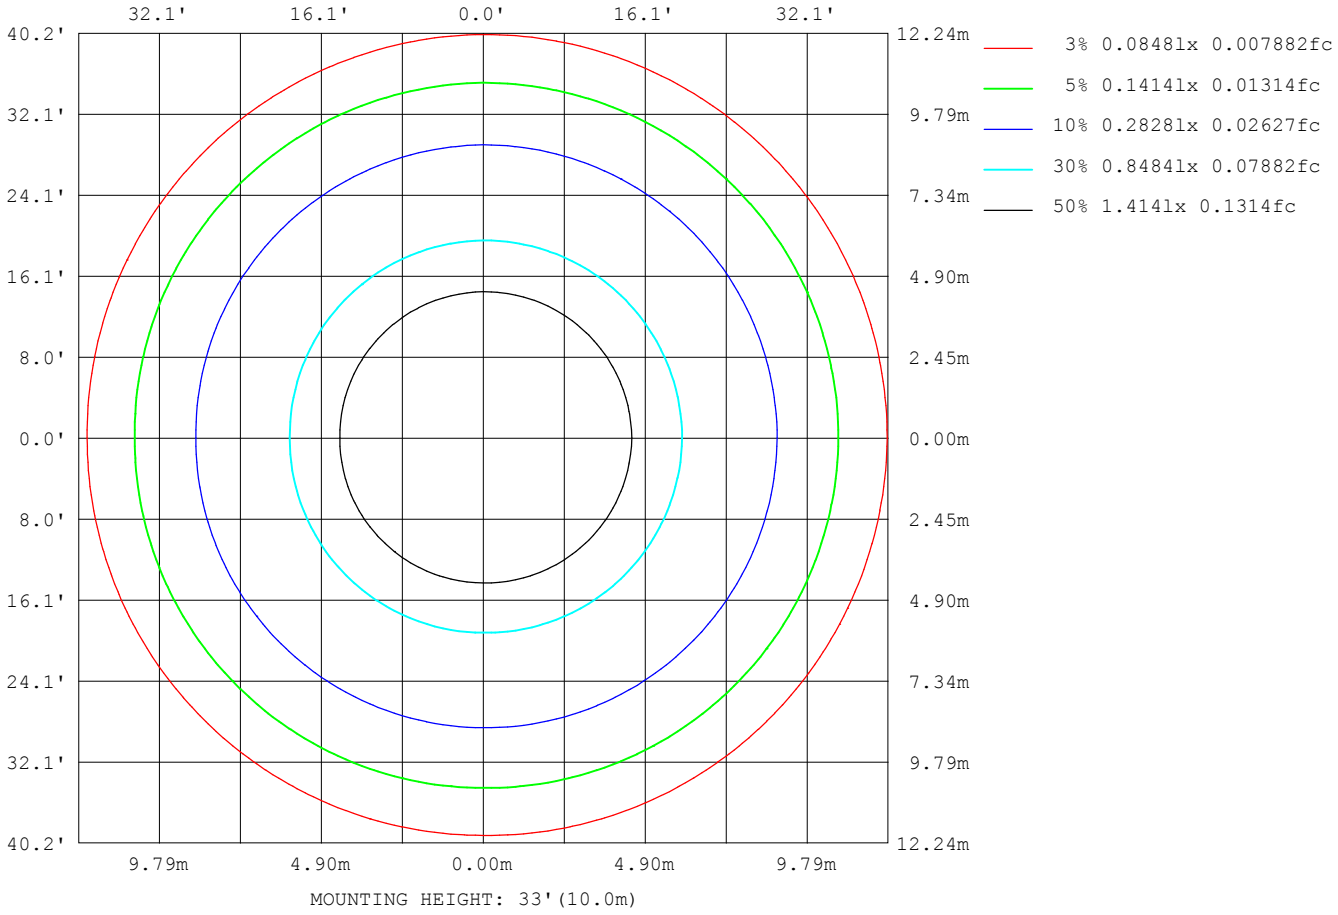

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-03-20

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

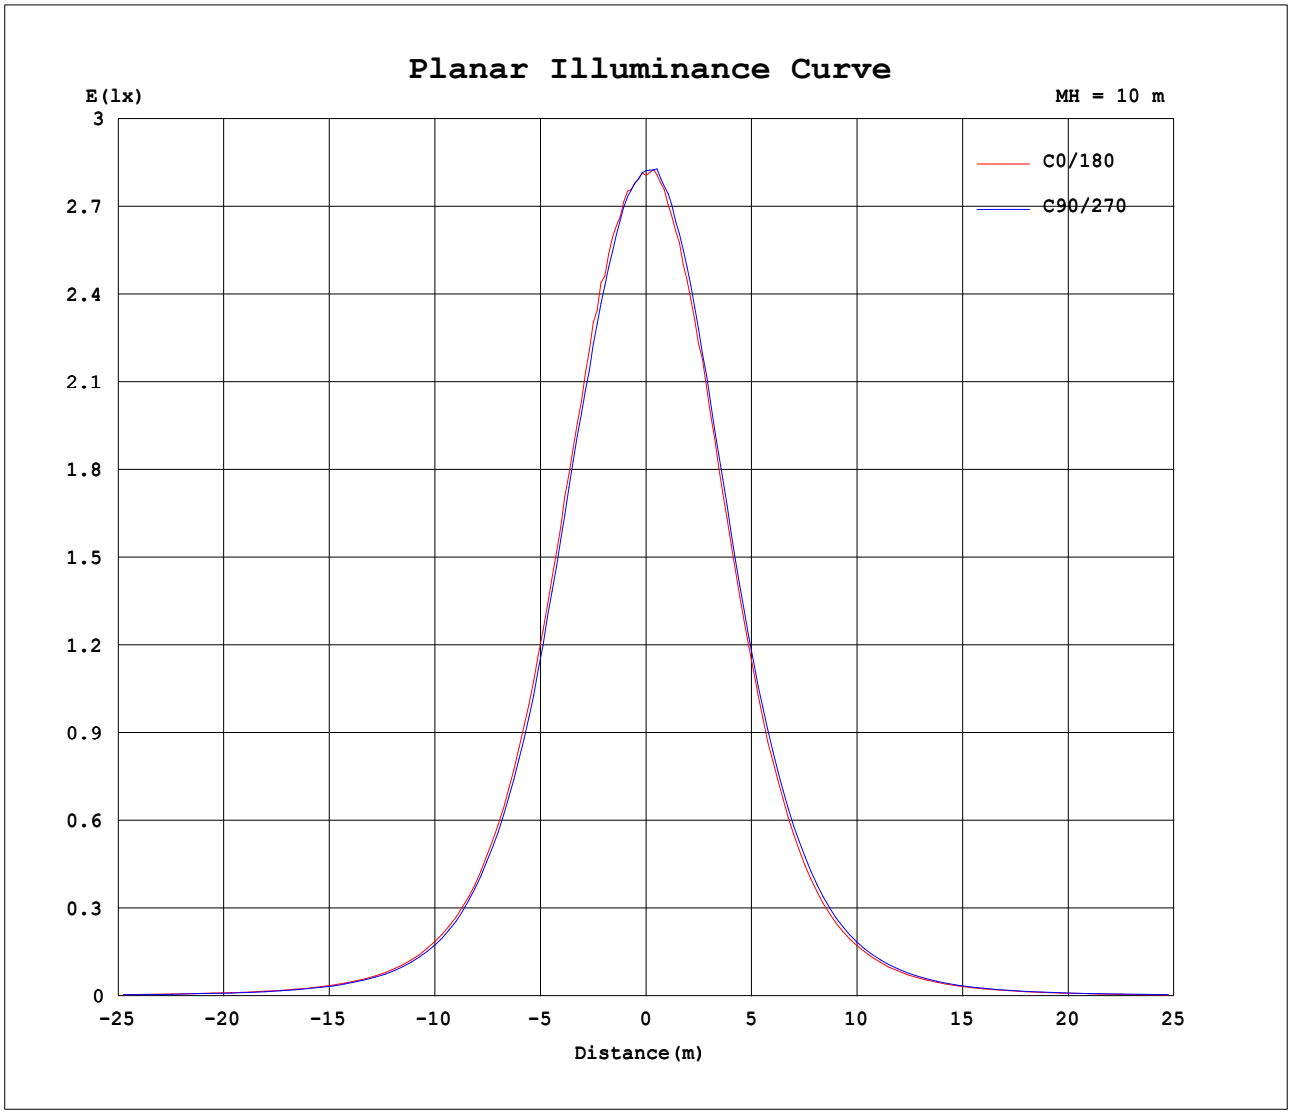

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-03-20

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.12V I:0.4750A P:3.634W PF:0.6313 Freq:59.97Hz Lamp Flux:317.513x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Micro 3.5W 2700K	WEIGHT:
SPEC.:60°lens	DIM.:	SERIAL No.:3
MFR.: EVERFINE	SUR.:	Shielding Angle:

Flux out:173.4 lm

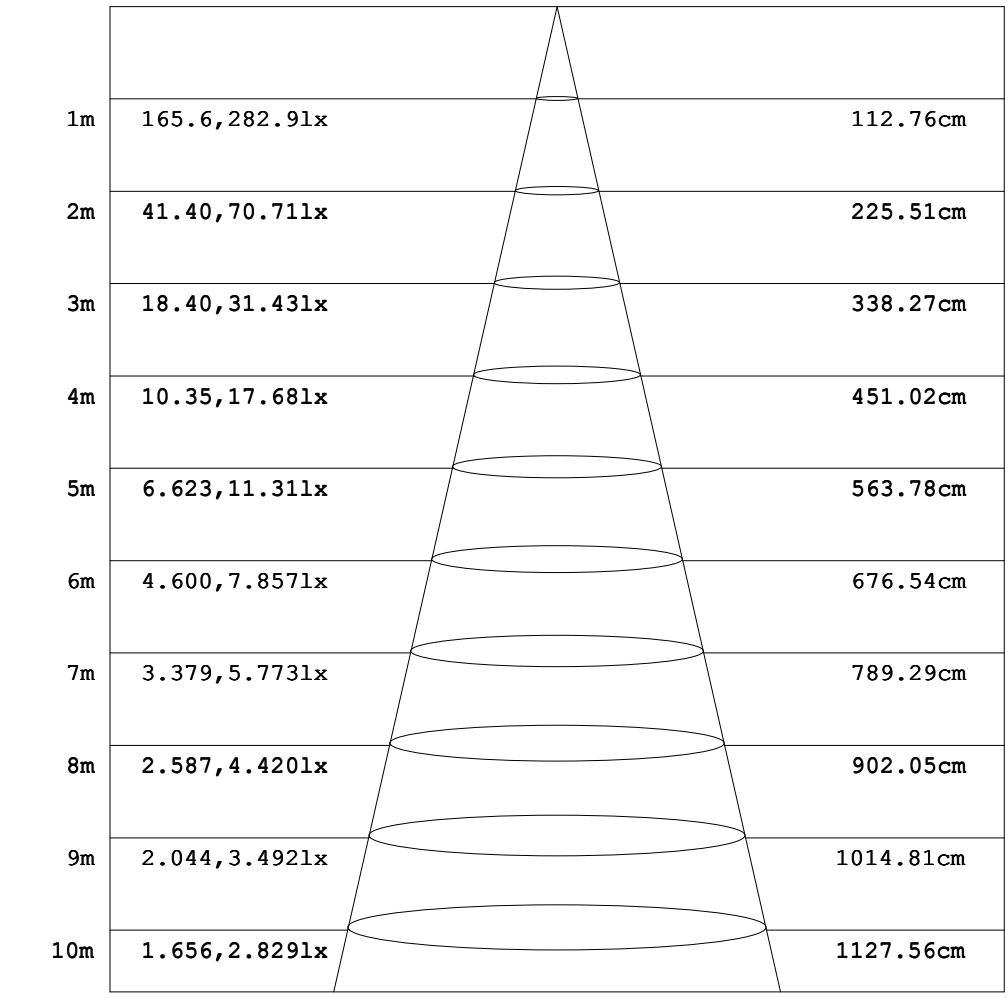

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-03-20

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.12V I:0.4750A P:3.634W PF:0.6313 Freq:59.97Hz Lamp Flux:317.513x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Micro 3.5W 2700K	WEIGHT:
SPEC.:60°lens	DIM.:	SERIAL No.:3
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1 UNIT: cd

H(DEG) / V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.17	0.36	0.57	0.84	1.12	1.43	1.71	2.00	2.27	2.53	2.72	2.79
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.17	0.35	0.58	0.82	1.10	1.40	1.69	1.96	2.22	2.43	2.60	2.68
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.13	0.29	0.48	0.71	0.96	1.21	1.47	1.70	1.92	2.10	2.22	2.31
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.07	0.19	0.35	0.52	0.71	0.92	1.13	1.30	1.47	1.62	1.72	1.77
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.08	0.19	0.31	0.44	0.57	0.72	0.85	0.97	1.07	1.14	1.19
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.06	0.11	0.19	0.27	0.35	0.43	0.51	0.57	0.61	0.64
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.05	0.09	0.12	0.15	0.18	0.21	0.22
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.13	0.31	0.50	0.68	0.84	0.99	1.13	1.25	1.33	1.38	1.39
-70	0.00	0.00	0.00	0.00	0.20	0.69	1.32	2.23	3.07	3.74	4.37	4.99	5.58	6.08	6.45	6.78	7.04	7.20	7.25
-60	0.00	0.00	0.00	0.41	1.31	2.77	3.98	5.21	6.42	7.62	8.55	9.56	10.6	11.5	12.5	13.3	13.9	14.4	14.5
-50	0.00	0.00	0.12	1.18	3.05	4.67	6.40	8.09	9.66	11.5	13.9	16.5	19.6	22.9	26.0	28.7	30.9	32.4	33.0
-40	0.00	0.00	0.47	2.31	4.34	6.48	8.51	10.8	13.8	17.9	23.3	29.7	37.3	45.3	53.2	60.7	66.9	71.3	72.9
-30	0.00	0.00	0.79	3.19	5.53	8.00	10.5	14.1	19.5	27.0	37.2	49.7	64.5	81.3	98.2	113	125	133	136
-20	0.00	0.00	1.09	3.76	6.39	8.97	12.3	17.6	25.7	37.4	52.9	73.0	97.7	124	150	175	193	205	210
-10	0.00	0.00	1.31	4.10	6.98	9.70	13.8	20.3	30.6	45.7	65.8	92.7	125	159	192	222	244	257	261
0	0.00	0.00	1.39	4.22	7.20	9.96	14.3	21.2	32.7	48.8	70.5	101	134	172	207	242	262	279	281
10	0.00	0.00	1.32	4.12	7.01	9.73	13.8	20.4	30.8	46.0	66.2	93.3	125	159	193	223	246	261	267
20	0.00	0.00	1.11	3.79	6.44	9.03	12.4	17.7	25.9	37.9	53.7	73.9	98.9	126	152	176	195	208	213
30	0.00	0.00	0.81	3.22	5.59	8.08	10.6	14.3	19.8	27.5	38.0	50.9	65.8	82.9	100	116	128	137	140
40	0.00	0.00	0.49	2.37	4.42	6.60	8.64	11.0	14.1	18.3	23.8	30.7	38.6	46.9	55.3	62.8	69.4	73.9	75.7
50	0.00	0.00	0.14	1.25	3.13	4.80	6.58	8.25	9.83	11.8	14.2	17.0	20.2	23.7	27.1	30.2	32.7	34.4	35.1
60	0.00	0.00	0.00	0.45	1.42	2.89	4.13	5.42	6.68	7.88	8.84	9.85	10.9	11.9	12.9	13.8	14.6	15.1	15.3
70	0.00	0.00	0.00	0.00	0.26	0.77	1.49	2.45	3.26	3.97	4.68	5.36	5.95	6.47	6.96	7.33	7.59	7.77	7.85
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.08	0.24	0.45	0.65	0.85	1.07	1.27	1.48	1.67	1.81	1.91	1.96
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.09	0.15	0.18	0.23	0.27	0.27	0.27
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.08	0.18	0.28	0.37	0.47	0.59	0.64	0.72	0.75	0.75
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.11	0.24	0.38	0.55	0.72	0.90	1.04	1.17	1.25	1.32	1.34
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.23	0.40	0.62	0.83	1.06	1.28	1.48	1.67	1.80	1.89	1.91
170	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.14	0.32	0.53	0.77	1.03	1.32	1.59	1.84	2.08	2.28	2.44	2.45
180	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.17	0.36	0.57	0.84	1.12	1.43	1.71	2.00	2.27	2.53	2.72	2.77

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-03-20

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.12V I:0.4750A P:3.634W PF:0.6313 Freq:59.97Hz Lamp Flux:317.513x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Micro 3.5W 2700K	WEIGHT:
SPEC.:60°lens	DIM.:	SERIAL No.:3
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--2 UNIT: cd

H(DEG) / V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	2.75	2.61	2.43	2.21	1.95	1.67	1.36	1.08	0.78	0.58	0.32	0.13	0.00	0.00	0.00	0.00	0.00	0.00
-170	2.63	2.50	2.32	2.12	1.87	1.61	1.33	1.05	0.76	0.52	0.30	0.13	0.00	0.00	0.00	0.00	0.00	0.00
-160	2.26	2.16	2.02	1.84	1.62	1.38	1.14	0.89	0.64	0.44	0.25	0.10	0.00	0.00	0.00	0.00	0.00	0.00
-150	1.74	1.67	1.55	1.41	1.25	1.06	0.84	0.65	0.46	0.30	0.15	0.03	0.00	0.00	0.00	0.00	0.00	0.00
-140	1.17	1.12	1.03	0.93	0.81	0.67	0.53	0.39	0.28	0.15	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-130	0.63	0.59	0.54	0.48	0.40	0.33	0.24	0.16	0.08	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-120	0.21	0.20	0.17	0.14	0.10	0.06	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	1.41	1.40	1.35	1.26	1.14	1.01	0.86	0.70	0.52	0.35	0.18	0.04	0.01	0.00	0.00	0.00	0.00	0.00
-70	7.23	7.11	6.88	6.59	6.27	5.82	5.28	4.71	4.10	3.45	2.63	1.74	1.05	0.52	0.07	0.00	0.00	0.00
-60	14.4	14.1	13.5	12.8	11.9	11.0	10.0	9.00	7.94	6.77	5.67	4.48	3.26	1.81	0.78	0.05	0.00	0.00
-50	32.6	31.3	29.3	26.7	23.6	20.3	17.2	14.6	12.2	10.4	8.60	6.83	5.24	3.59	1.70	0.47	0.00	0.00
-40	71.7	67.7	61.9	54.6	46.7	38.7	31.1	24.6	19.0	14.7	11.7	9.22	6.94	4.96	2.88	0.88	0.00	0.00
-30	134	127	115	101	83.9	67.1	52.1	39.1	28.8	20.8	15.1	11.4	8.60	6.12	3.78	1.27	0.02	0.00
-20	206	195	178	153	128	102	76.6	56.1	39.7	27.6	19.0	13.3	9.90	6.92	4.41	1.64	0.04	0.00
-10	257	247	226	198	165	130	98.2	70.3	48.9	33.0	22.1	15.0	10.8	7.54	4.80	1.92	0.06	0.00
0	278	266	245	215	180	142	107	75.6	52.7	35.4	23.4	15.6	11.1	7.79	4.95	2.02	0.06	0.00
10	262	250	227	198	165	131	98.7	70.7	49.2	33.2	22.2	15.1	10.8	7.57	4.82	1.93	0.06	0.00
20	209	197	179	155	130	103	77.5	56.9	40.2	27.9	19.1	13.4	9.96	6.98	4.44	1.66	0.04	0.00
30	138	130	118	103	85.5	68.5	53.3	39.9	29.3	21.1	15.3	11.5	8.67	6.18	3.82	1.29	0.02	0.00
40	74.3	70.3	64.0	56.7	48.3	40.0	32.1	25.1	19.4	15.0	11.8	9.34	7.07	5.04	2.94	0.90	0.00	0.00
50	34.6	33.1	30.8	27.8	24.4	21.0	17.8	14.9	12.5	10.5	8.76	7.01	5.38	3.67	1.76	0.50	0.00	0.00
60	15.1	14.7	14.1	13.2	12.3	11.3	10.3	9.29	8.20	7.03	5.87	4.63	3.39	1.92	0.82	0.05	0.00	0.00
70	7.80	7.66	7.43	7.09	6.66	6.19	5.65	5.02	4.33	3.64	2.85	1.91	1.13	0.58	0.08	0.00	0.00	0.00
80	1.94	1.88	1.77	1.61	1.42	1.24	1.04	0.85	0.67	0.46	0.25	0.04	0.01	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.01	0.02	0.02	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.29	0.30	0.26	0.23	0.20	0.15	0.09	0.07	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.77	0.77	0.70	0.67	0.56	0.46	0.37	0.26	0.17	0.09	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	1.34	1.30	1.25	1.14	1.02	0.86	0.68	0.51	0.35	0.23	0.10	0.01	0.00	0.00	0.00	0.00	0.00	0.00
160	1.92	1.87	1.77	1.62	1.43	1.23	1.01	0.79	0.56	0.37	0.21	0.08	0.00	0.00	0.00	0.00	0.00	0.00
170	2.46	2.35	2.18	2.00	1.77	1.52	1.26	1.00	0.72	0.49	0.28	0.12	0.00	0.00	0.00	0.00	0.00	0.00
180	2.75	2.61	2.43	2.21	1.95	1.67	1.36	1.08	0.78	0.58	0.32	0.13	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-03-20

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: