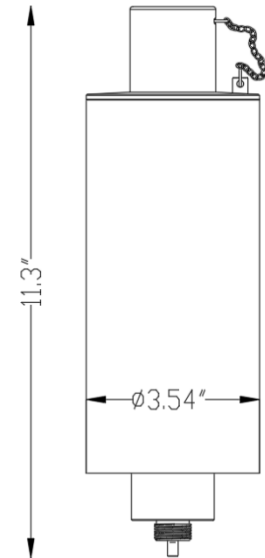




LumienFUEGO (Tiki Torch)

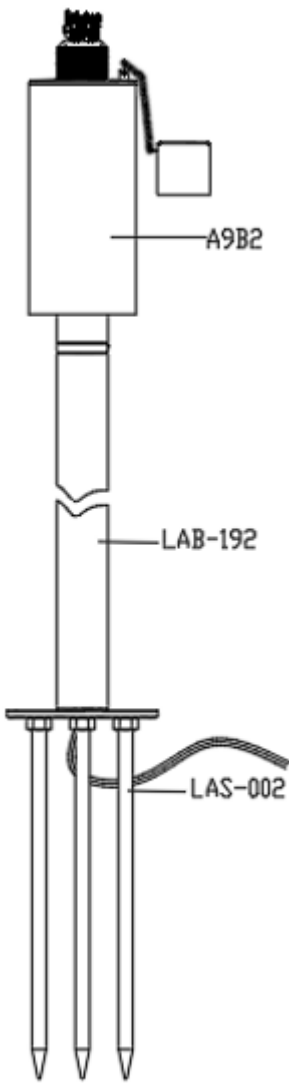
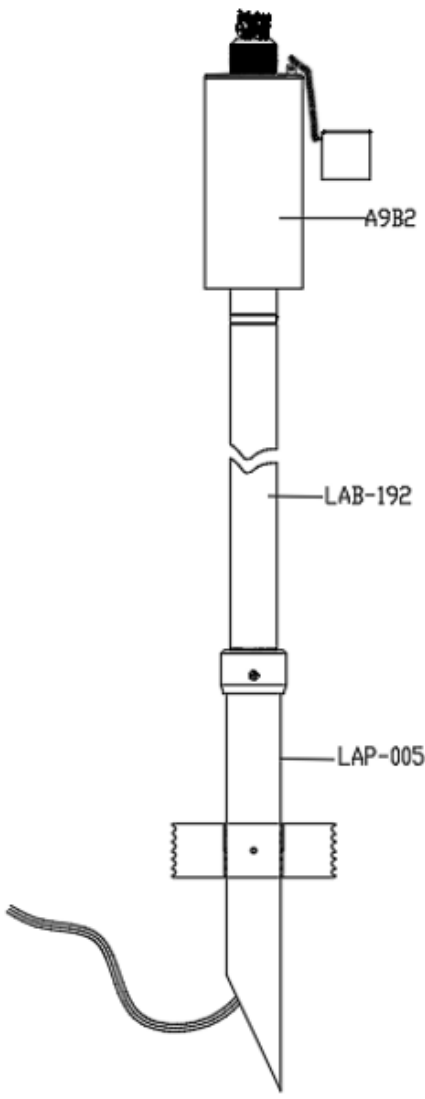
(A9B2-7W-A)

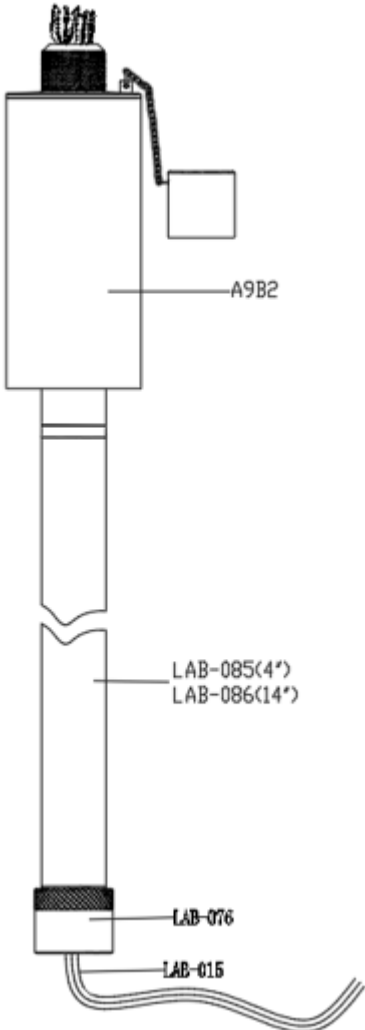
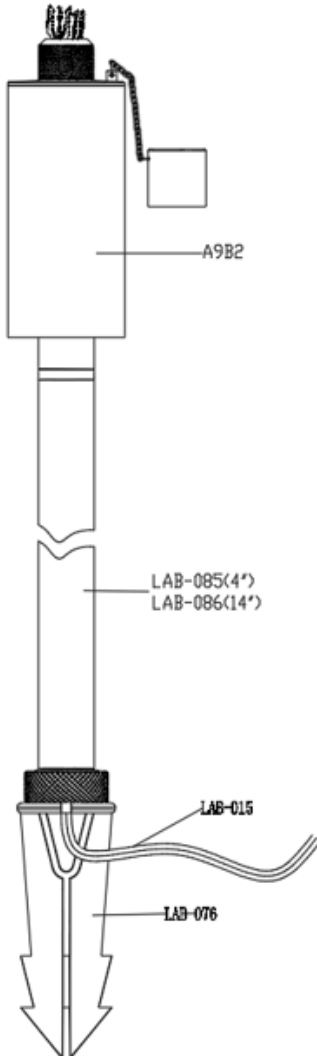


SPECIFICATIONS

CONSTRUCTION	Modular Construction: Cylindrical Brass Oil Drum, RGBTW Module, Adapter (LAB-163)
FUEL CAPACITY	Holds 20 OZ. Approximately 10 hours burn time
WICK	Long lasting 3/4" round braided fiberglass
LIGHT SOURCE	7W RGBTW (2700-5700K) LED Module Voltage Range: 10-15AC Lumen Output: 27K-57K: 189-222 Lm, R: 108 Lm, G: 239 Lm, B: 72 Lm Beam Spread: Adjustable Collar Volt-Amperes: 10.13

ORDERING INFORMATION FOR COMMON INSTALLATIONS:

A: A9B2+LAB-192+LAS-002	B: A9B2+LAB-192+LAP-005
	

D: A9B2+LAB-085(LAB-086)+LAB-076+LAB-015	E: A9B2+LAB-085(LAB-086)+LAP-006+LAB-015
	

WARNING:

- Do not touch the fixture while the torch is lit to avoid burns.
- Keep away from flammable and explosive materials when using.
- Do not light the torch in stormy weather.
- Please cover the wick when the torch is not in use.
- When refilling the oil, please refrain from dripping on the surface of the fixture as much as possible to avoid corrosion.