

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	1400.0 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	76.1V x 77.4H
	At 50% of Imax	48.2V x 49.7H
	At 90% of Imax	21.3V x 21.2H

Beam Flux	Total	1000.2 lumens per klm.
	To 10% of Imax	889.3 lumens per klm.
	To 50% of Imax	589.3 lumens per klm.
	To 90% of Imax	143.5 lumens per klm.

Upward LOR	1.2 %
Downward LOR	98.9 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.19V I:1.090A P:9.589W PF:0.7218 Freq:59.98Hz Lamp Flux:344.675x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight RGBWW	WEIGHT:
SPEC.:10W GREEN 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:UPLIGHT SHROUD

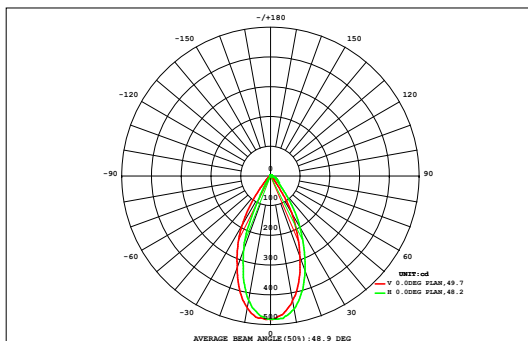

DATA OF LAMP		Eff:35.94lm/W	
MODEL	D9B1-10W-A	Imax(cd)	482.5
NOMINAL POWER(W)	10	AVAILABILITY(%)	88.5
RATED VOLTAGE(V)	12	Avai. FLUX(lm)	305.0
NOMINAL FLUX(lm)	344.675	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	344.7
TEST VOLTAGE(V)	12	θ @50%(H,V)	50,48DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.01	0.03	0.06	0.10	0.14	0.19	0.24	0.27	0.27	0.23	0.19	0.14	0.09	0.05	0.03	0.01	0.00	2.08	0.00
72	0.01	0.02	0.05	0.10	0.17	0.24	0.31	0.38	0.43	0.43	0.37	0.30	0.22	0.15	0.09	0.05	0.02	0.01	3.35	0.00
64	0.01	0.03	0.08	0.15	0.23	0.33	0.43	0.52	0.60	0.59	0.50	0.40	0.30	0.20	0.13	0.07	0.03	0.01	4.61	0.00
56	0.01	0.05	0.10	0.19	0.30	0.45	0.65	0.87	1.04	1.02	0.82	0.59	0.40	0.25	0.15	0.08	0.04	0.01	7.02	2.05
48	0.02	0.06	0.12	0.23	0.41	0.74	1.29	1.92	2.34	2.26	1.73	1.09	0.61	0.33	0.18	0.09	0.04	0.01	13.5	10.7
40	0.02	0.06	0.14	0.29	0.62	1.42	2.62	3.67	4.27	4.18	3.40	2.21	1.06	0.46	0.21	0.10	0.04	0.01	24.8	22.8
32	0.02	0.06	0.15	0.36	0.99	2.41	4.06	5.51	6.44	6.33	5.20	3.57	1.83	0.64	0.24	0.10	0.04	0.01	38.0	36.4
24	0.02	0.06	0.16	0.43	1.41	3.26	5.26	7.15	8.29	8.17	6.82	4.70	2.58	0.84	0.26	0.09	0.03	0.01	49.5	48.2
16	0.02	0.06	0.16	0.47	1.67	3.73	5.95	8.08	9.18	9.03	7.64	5.29	2.92	0.94	0.25	0.08	0.02	0.01	55.5	54.3
8	0.01	0.05	0.15	0.44	1.57	3.54	5.78	7.91	9.03	8.88	7.48	5.12	2.73	0.84	0.21	0.06	0.02	0.00	53.8	52.6
0	0.01	0.04	0.12	0.33	1.14	2.70	4.68	6.56	7.62	7.51	6.22	4.11	2.01	0.57	0.16	0.05	0.01	0.00	43.9	42.6
-8	0.01	0.04	0.10	0.23	0.65	1.65	2.87	4.32	5.13	5.02	4.01	2.38	1.06	0.31	0.11	0.04	0.01	0.00	27.9	26.5
-16	0.01	0.03	0.07	0.15	0.31	0.73	1.32	1.75	1.89	1.79	1.48	0.91	0.38	0.15	0.07	0.03	0.01	0.00	11.1	8.79
-24	0.01	0.02	0.05	0.09	0.15	0.25	0.41	0.51	0.43	0.36	0.33	0.21	0.12	0.07	0.04	0.01	0.00	0.00	3.07	0.00
-32	0.00	0.01	0.03	0.05	0.08	0.10	0.12	0.10	0.05	0.03	0.05	0.06	0.05	0.03	0.02	0.01	0.00	0.00	0.79	0.00
-40	0.00	0.01	0.02	0.03	0.04	0.05	0.05	0.04	0.01	0.01	0.02	0.02	0.02	0.01	0.01	0.00	0.00	0.00	0.32	0.00
-48	0.00	0.00	0.01	0.01	0.02	0.02	0.02	0.01	0.01	0.00	0.00	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.13	0.00
-56	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.00
-64	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.00
-72	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)	16	24	32	40	48	56	64	72			
Φ t	0.19	0.62	1.54	3.60	9.86	21.8	36.0	49.5	57.0	55.9	46.3	31.2	16.4	5.92	2.18	0.89	0.33	0.09	339	---
Φ a	0.00	0.00	0.00	0.18	6.89	19.3	33.7	47.2	54.9	53.7	44.1	28.9	13.9	2.30	0.00	0.00	0.00	0.00	---	305

one-half-peak spread: U:21.6,D:21.9 , L:21.8,R:22.3


NEMA Beam Type: Type 5

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.19V I:1.090A P:9.589W PF:0.7218 Freq:59.98Hz Lamp Flux:344.675x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight RGBWW	WEIGHT:
SPEC.:10W GREEN 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:UPLIGHT SHROUD

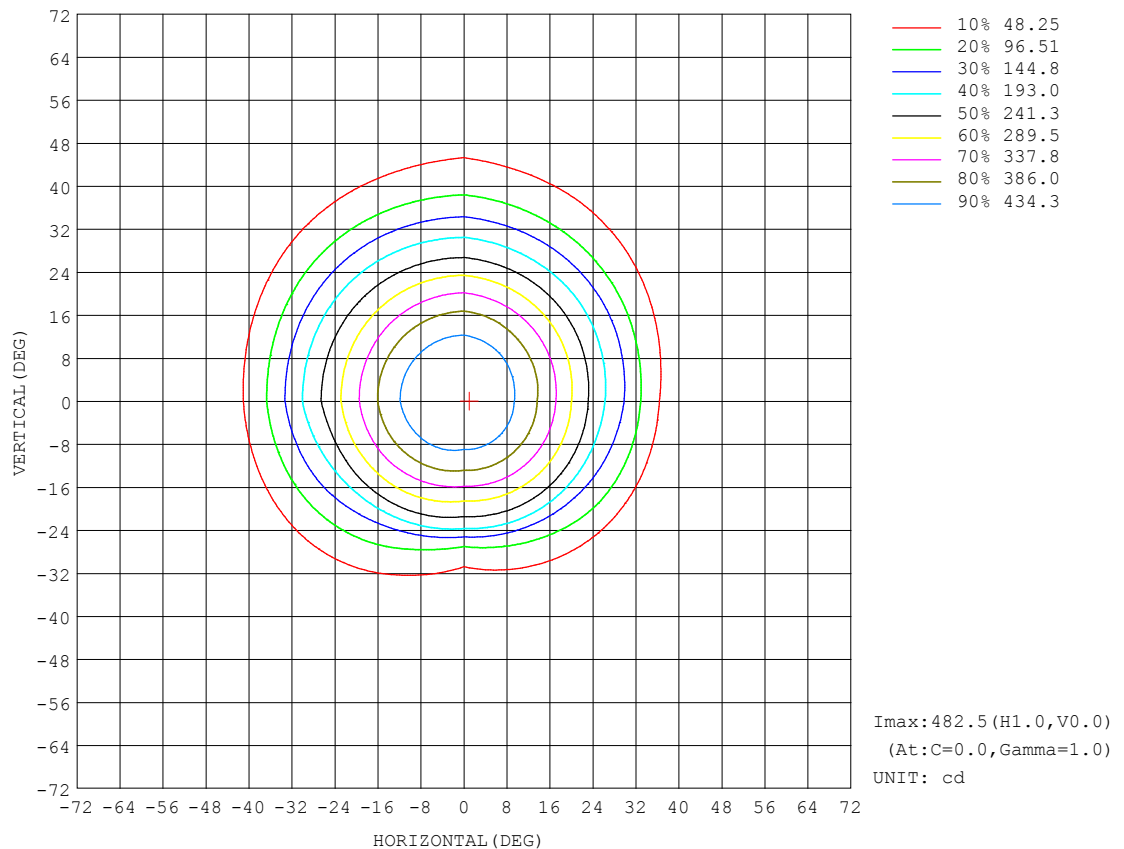


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.19V I:1.090A P:9.589W PF:0.7218 Freq:59.98Hz Lamp Flux:344.675x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight RGBWW	WEIGHT:
SPEC.:10W GREEN 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:UPLIGHT SHROUD

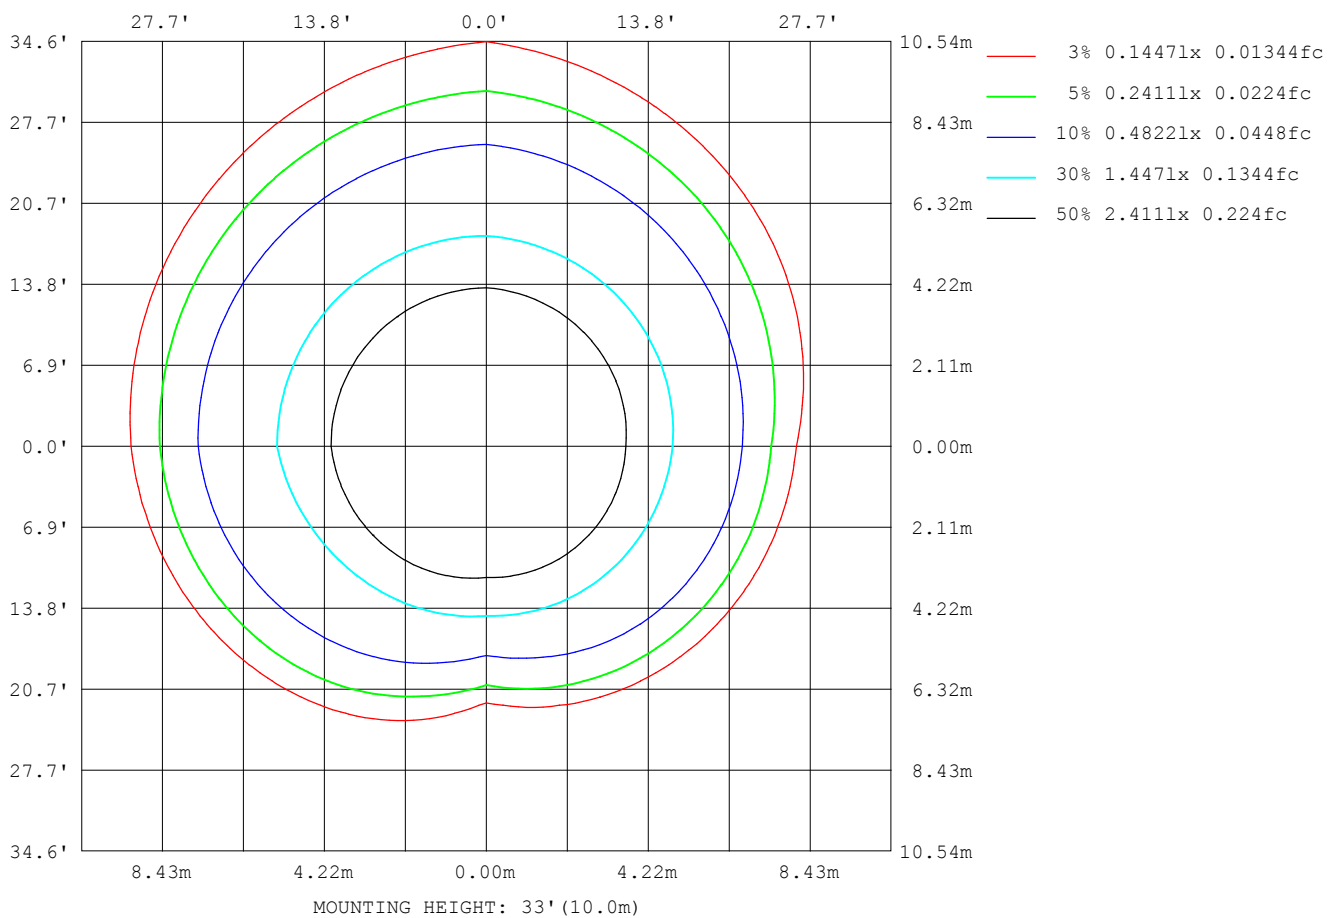

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

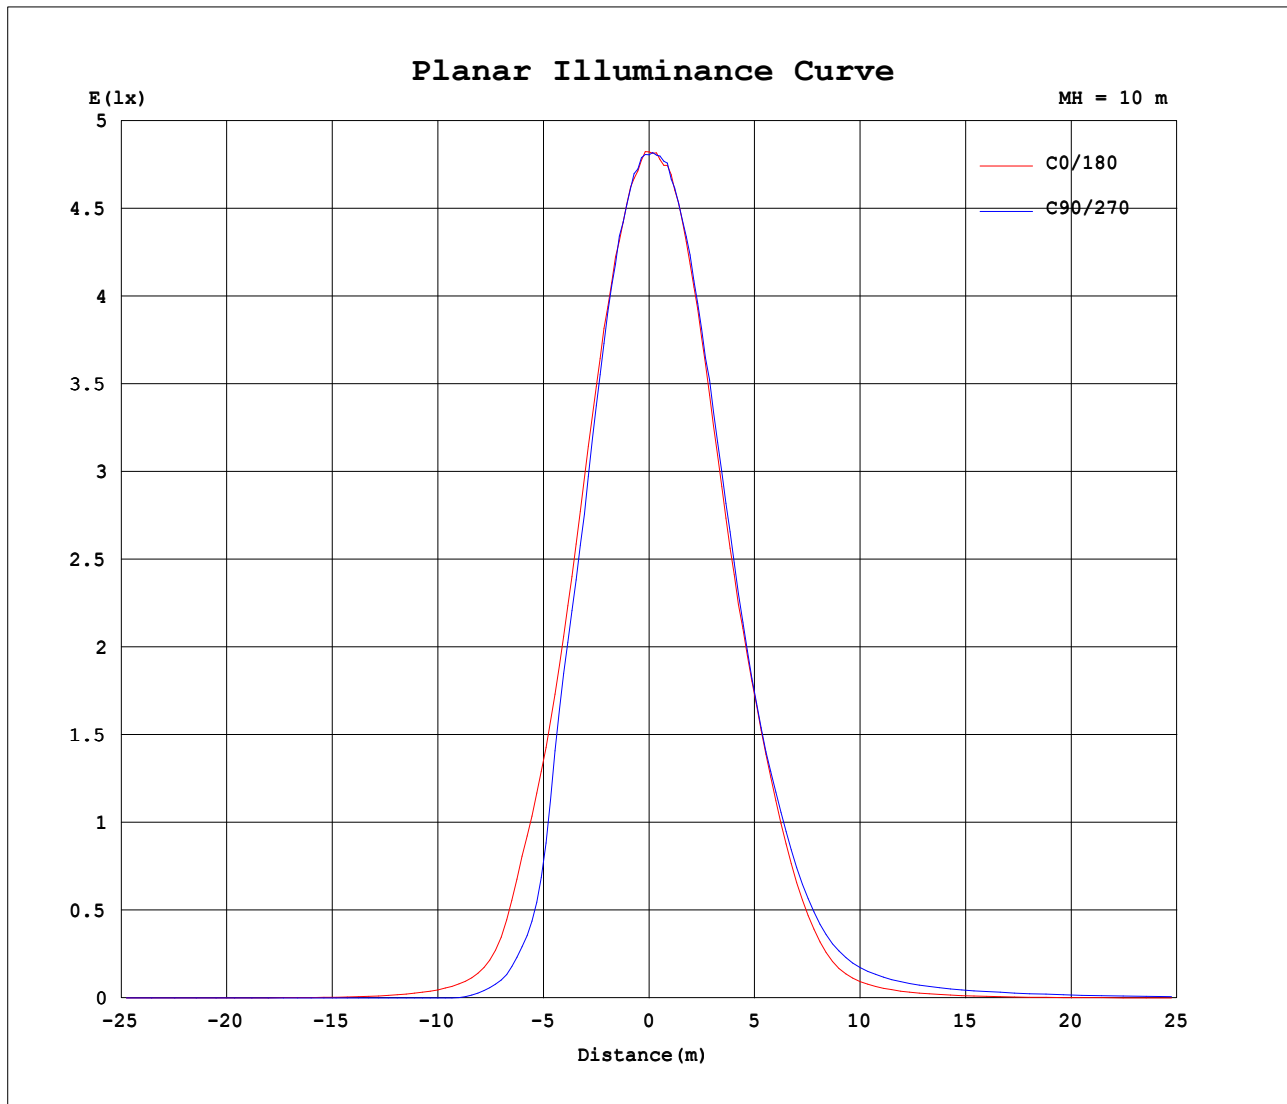


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.19V I:1.090A P:9.589W PF:0.7218 Freq:59.98Hz Lamp Flux:344.675x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight RGBWW	WEIGHT:
SPEC.:10W GREEN 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:UPLIGHT SHROUD

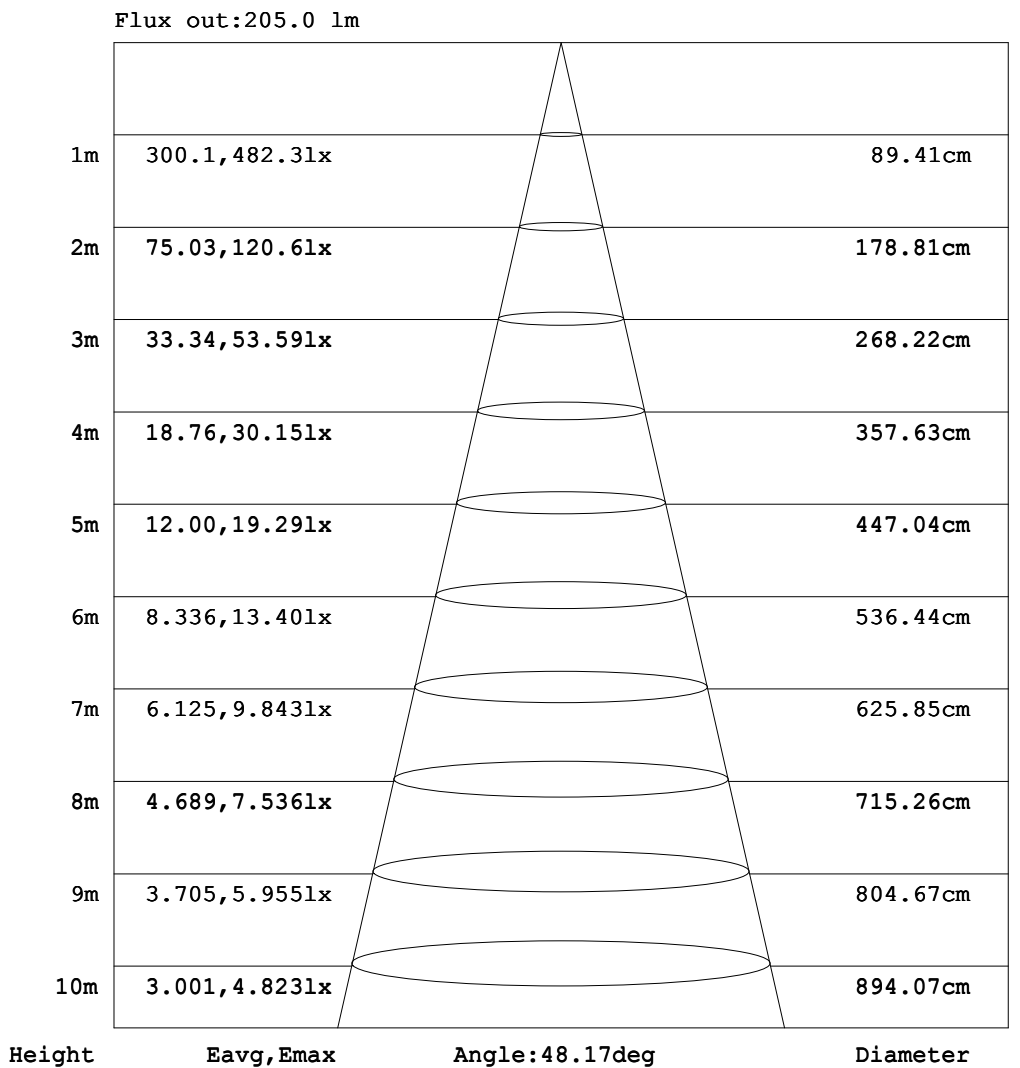

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.19V I:1.090A P:9.589W PF:0.7218 Freq:59.98Hz Lamp Flux:344.675x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight RGBWW	WEIGHT:
SPEC.:10W GREEN 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:UPLIGHT SHROUD

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.33	0.67	1.04	1.43	1.83	2.18	2.55	2.89	3.20	3.40
-170	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.04	0.13	0.38	0.76	1.14	1.55	1.98	2.38	2.76	3.11	3.40	3.64
-160	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.07	0.13	0.36	0.66	1.02	1.41	1.81	2.20	2.57	2.89	3.15	3.38
-150	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.07	0.14	0.23	0.47	0.74	1.07	1.40	1.72	2.02	2.29	2.52	2.69
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.05	0.10	0.18	0.27	0.43	0.64	0.85	1.09	1.30	1.50	1.65	1.77
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.05	0.10	0.15	0.22	0.32	0.42	0.52	0.65	0.76	0.86	0.93
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.05	0.08	0.11	0.16	0.19	0.24	0.28	0.32	0.34
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.03	0.03	0.04
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.03	0.03	0.02	0.01	0.01	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.03	0.08	0.14	0.18	0.22	0.28	0.28	0.30	0.30	0.27	0.22	0.16	0.08	0.00
-60	0.00	0.00	0.00	0.00	0.10	0.22	0.36	0.49	0.69	0.87	1.04	1.15	1.19	1.15	1.05	0.88	0.63	0.33	0.00
-50	0.00	0.00	0.00	0.10	0.26	0.49	0.85	1.27	1.74	2.15	2.60	2.95	3.23	3.33	3.17	2.74	2.02	1.07	0.00
-40	0.00	0.00	0.01	0.20	0.52	0.96	1.64	2.44	3.37	4.46	5.75	7.09	8.37	9.42	10.1	10.4	9.88	7.82	3.81
-30	0.00	0.00	0.07	0.30	0.75	1.54	2.62	3.98	5.86	8.43	11.8	16.6	25.5	40.8	55.0	65.4	70.3	66.8	54.9
-20	0.00	0.00	0.11	0.41	1.06	2.15	3.63	5.84	9.23	14.3	23.1	44.8	79.7	118	153	203	248	266	266
-10	0.00	0.00	0.12	0.54	1.30	2.66	4.60	7.71	12.7	21.4	42.4	89.0	147	207	278	338	390	420	425
0	0.00	0.00	0.12	0.60	1.43	2.94	5.17	8.92	15.1	26.7	57.8	120	194	262	330	401	451	480	482
10	0.00	0.01	0.19	0.75	1.79	3.57	6.05	9.82	15.9	26.5	51.5	105	173	239	301	363	414	444	454
20	0.00	0.03	0.23	0.78	1.94	3.81	6.29	9.67	14.7	22.5	36.3	67.7	118	173	223	267	304	330	340
30	0.00	0.04	0.23	0.76	1.84	3.63	6.02	8.91	12.6	17.7	25.0	36.3	56.3	87.5	122	154	178	193	199
40	0.00	0.04	0.17	0.69	1.60	3.06	5.15	7.69	10.5	13.8	17.9	22.8	29.0	36.8	46.2	57.6	67.8	76.3	80.5
50	0.00	0.05	0.16	0.52	1.18	2.23	3.80	5.81	8.10	10.7	13.3	16.1	19.0	22.0	25.1	28.2	31.0	33.4	35.2
60	0.00	0.05	0.15	0.33	0.76	1.44	2.34	3.56	5.15	6.95	8.95	10.9	13.1	15.1	17.1	18.8	20.4	21.9	23.2
70	0.00	0.05	0.12	0.24	0.42	0.72	1.15	1.75	2.45	3.26	4.23	5.28	6.43	7.64	8.79	9.88	10.9	11.8	12.5
80	0.00	0.04	0.10	0.16	0.25	0.37	0.50	0.66	0.85	1.06	1.30	1.56	1.85	2.14	2.44	2.74	3.01	3.26	3.47
90	0.00	0.04	0.08	0.11	0.15	0.19	0.23	0.27	0.31	0.34	0.38	0.42	0.46	0.50	0.54	0.57	0.61	0.65	0.69
100	0.00	0.04	0.07	0.09	0.11	0.12	0.13	0.14	0.14	0.14	0.14	0.14	0.14	0.14	0.14	0.14	0.14	0.15	0.15
110	0.00	0.03	0.05	0.06	0.06	0.06	0.05	0.04	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.03	0.04	0.04	0.03	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.02	0.03	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.00
140	0.00	0.02	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.08	0.11	0.15	0.24	0.31	0.31	0.29
150	0.00	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.11	0.21	0.41	0.60	0.81	0.97	1.09	1.16	1.17
160	0.00	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.14	0.31	0.59	0.89	1.19	1.48	1.71	1.87	1.99	1.98
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.25	0.57	0.90	1.26	1.63	1.96	2.26	2.52	2.65	2.67
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.33	0.67	1.04	1.43	1.83	2.18	2.55	2.89	3.20	3.37

H(β) Range:-90 - 90DEG
 H(β) Interval: 0.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:ADMIN
 Test Date:2023-08-18

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
 Humidity:65.0%
 Test Distance:13.563m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.19V I:1.090A P:9.589W PF:0.7218 Freq:59.98Hz Lamp Flux:344.675x1 lm																		
NAME: LED LANDSCAPE LIGHT									TYPE:Copper Spotlight RGBWW WEIGHT:									
SPEC.:10W GREEN 40°LENS									DIM.:					SERIAL No.:1				
MFR.: EVERFINE									SUR.:					Shielding Angle:UPLIGHT SHROUD				

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	3.51	3.42	3.29	3.02	2.74	2.38	1.96	1.49	1.05	0.63	0.31	0.12	0.00	0.00	0.00	0.00	0.00	0.00	
-170	3.57	3.46	3.28	3.00	2.68	2.31	1.88	1.42	0.99	0.65	0.32	0.11	0.01	0.00	0.00	0.00	0.00	0.00	
-160	3.29	3.15	2.95	2.71	2.36	2.00	1.60	1.21	0.83	0.50	0.25	0.04	0.01	0.00	0.00	0.00	0.00	0.00	
-150	2.62	2.49	2.31	2.08	1.80	1.49	1.17	0.86	0.61	0.35	0.16	0.03	0.01	0.00	0.00	0.00	0.00	0.00	
-140	1.72	1.63	1.50	1.33	1.12	0.92	0.73	0.50	0.32	0.17	0.05	0.02	0.00	0.00	0.00	0.00	0.00	0.00	
-130	0.90	0.84	0.77	0.65	0.54	0.44	0.29	0.20	0.10	0.05	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.32	0.29	0.25	0.20	0.16	0.11	0.08	0.05	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.03	0.03	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.02	0.03	0.04	0.04	0.04	0.03	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.10	0.19	0.26	0.30	0.30	0.28	0.25	0.22	0.17	0.11	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	0.49	0.91	1.20	1.35	1.37	1.25	1.05	0.80	0.57	0.39	0.26	0.14	0.02	0.00	0.00	0.00	0.00	0.00	
-40	5.20	5.44	5.27	5.07	4.69	4.03	3.17	2.38	1.66	1.04	0.60	0.34	0.16	0.01	0.00	0.00	0.00	0.00	
-30	61.2	59.3	48.3	32.8	20.3	12.3	8.31	5.70	3.64	2.27	1.25	0.62	0.31	0.08	0.00	0.00	0.00	0.00	
-20	260	235	182	126	87.1	43.3	20.6	11.5	6.92	3.93	2.16	1.02	0.46	0.17	0.00	0.00	0.00	0.00	
-10	412	374	315	247	166	106	44.0	19.7	10.7	5.77	3.05	1.42	0.60	0.24	0.00	0.00	0.00	0.00	
0	467	427	369	290	212	142	63.2	25.8	13.4	6.99	3.59	1.66	0.67	0.27	0.00	0.00	0.00	0.00	
10	437	398	340	269	198	131	60.4	28.8	15.7	8.88	5.15	2.87	1.51	0.73	0.21	0.07	0.01	0.00	
20	324	291	246	196	142	81.4	43.5	24.8	15.1	9.37	6.00	3.68	2.12	1.05	0.37	0.12	0.03	0.00	
30	188	167	137	99.9	67.0	43.1	28.1	18.9	12.9	9.04	6.19	4.03	2.40	1.17	0.47	0.15	0.04	0.00	
40	73.7	63.4	52.5	41.2	32.0	24.7	18.8	14.5	11.0	8.20	5.85	3.85	2.25	1.08	0.48	0.17	0.04	0.00	
50	32.8	29.9	26.7	23.3	20.1	17.0	14.2	11.5	9.08	6.75	4.80	3.09	1.76	0.93	0.42	0.16	0.05	0.00	
60	21.7	20.0	18.2	16.3	14.3	12.2	10.0	8.13	6.24	4.57	3.11	1.99	1.22	0.66	0.33	0.15	0.05	0.00	
70	11.7	10.8	9.70	8.56	7.39	6.17	5.02	3.95	3.04	2.27	1.61	1.07	0.69	0.42	0.24	0.12	0.05	0.00	
80	3.25	3.00	2.72	2.42	2.10	1.82	1.55	1.29	1.06	0.85	0.66	0.50	0.37	0.25	0.16	0.10	0.04	0.00	
90	0.65	0.61	0.57	0.54	0.50	0.46	0.42	0.38	0.34	0.31	0.27	0.23	0.19	0.15	0.11	0.08	0.04	0.00	
100	0.15	0.14	0.14	0.14	0.14	0.14	0.14	0.14	0.14	0.14	0.14	0.13	0.12	0.11	0.09	0.07	0.04	0.00	
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.05	0.06	0.06	0.06	0.05	0.03	0.00	
120	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.03	0.04	0.04	0.03	0.00	
130	0.05	0.09	0.13	0.13	0.13	0.12	0.07	0.05	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.03	0.02	0.00	
140	0.38	0.44	0.43	0.40	0.38	0.36	0.33	0.23	0.15	0.07	0.00	0.00	0.00	0.00	0.01	0.02	0.02	0.00	
150	1.26	1.29	1.25	1.16	1.00	0.84	0.65	0.50	0.39	0.21	0.09	0.00	0.00	0.00	0.00	0.01	0.01	0.00	
160	2.12	2.13	2.09	1.99	1.75	1.48	1.17	0.87	0.61	0.37	0.18	0.01	0.00	0.00	0.00	0.01	0.01	0.00	
170	2.82	2.87	2.78	2.58	2.34	2.02	1.64	1.24	0.86	0.57	0.27	0.09	0.00	0.00	0.00	0.00	0.00	0.00	
180	3.51	3.42	3.29	3.02	2.74	2.38	1.96	1.49	1.05	0.63	0.31	0.12	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: