

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		4264.1 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of I _{max} At 50% of I _{max} At 90% of I _{max}	47.6V x 47.4H 23.6V x 23.3H 9.3V x 9.1H
Beam Flux	Total To 10% of I _{max} To 50% of I _{max} To 90% of I _{max}	1000.6 lumens per klm. 800.4 lumens per klm. 405.9 lumens per klm. 81.3 lumens per klm.
	Upward LOR Downward LOR	0.9 % 99.1 %
Luminaire Efficiency (Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-02-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.17V I:0.1943A P:1.387W PF:0.5866 Freq:59.99Hz Lamp Flux:117.088x1 lm		
NAME: Nano	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

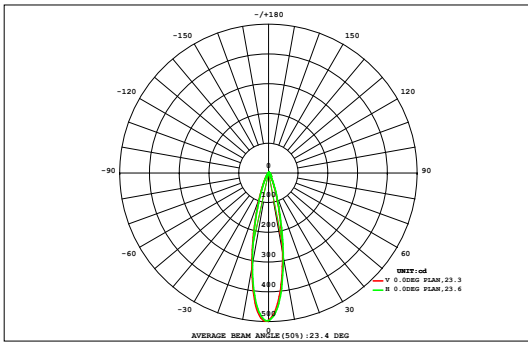

DATA OF LAMP		Eff:84.41lm/W	
MODEL N4B1-1.5W-30K-15-A	Imax (cd)	499.3	
NOMINAL POWER (W)	1.5	AVAILABILITY (%)	79.8
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	93.38
NOMINAL FLUX (lm)	117.088	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	117.1
TEST VOLTAGE (V)	12	θ @50% (H, V)	23,24DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM															UNIT:lm		Φ t	Φ a	
	0.00	0.01	0.01	0.02	0.02	0.03	0.04	0.04	0.04	0.04	0.04	0.03	0.03	0.02	0.02	0.01	0.01	0.00	0.41	0.00
45	0.01	0.01	0.02	0.03	0.04	0.05	0.06	0.07	0.07	0.07	0.07	0.06	0.05	0.04	0.03	0.02	0.01	0.01	0.69	0.00
40	0.01	0.02	0.03	0.04	0.06	0.08	0.10	0.12	0.13	0.13	0.12	0.10	0.08	0.06	0.04	0.03	0.02	0.01	1.16	0.00
35	0.01	0.03	0.04	0.06	0.09	0.13	0.17	0.21	0.23	0.23	0.21	0.17	0.12	0.09	0.06	0.04	0.02	0.01	1.93	0.00
30	0.02	0.03	0.05	0.09	0.14	0.21	0.30	0.38	0.43	0.43	0.37	0.28	0.20	0.13	0.08	0.05	0.03	0.02	3.25	1.09
25	0.02	0.04	0.07	0.12	0.21	0.34	0.52	0.72	0.84	0.82	0.67	0.47	0.31	0.19	0.11	0.07	0.04	0.02	5.58	4.15
20	0.03	0.05	0.09	0.17	0.30	0.52	0.88	1.32	1.62	1.57	1.21	0.77	0.45	0.26	0.14	0.08	0.04	0.02	9.52	8.37
15	0.03	0.06	0.11	0.20	0.39	0.75	1.37	2.15	2.68	2.59	1.94	1.16	0.62	0.33	0.17	0.09	0.05	0.03	14.7	13.7
10	0.03	0.06	0.12	0.23	0.46	0.93	1.77	2.83	3.51	3.37	2.51	1.47	0.74	0.37	0.19	0.10	0.05	0.03	18.8	17.8
5	0.03	0.06	0.12	0.23	0.47	0.95	1.82	2.91	3.61	3.44	2.55	1.49	0.75	0.37	0.19	0.10	0.05	0.03	19.2	18.2
0	0.03	0.06	0.11	0.21	0.41	0.80	1.49	2.35	2.88	2.75	2.03	1.21	0.63	0.33	0.17	0.09	0.05	0.03	15.6	14.6
-5	0.03	0.05	0.09	0.17	0.32	0.58	1.01	1.50	1.81	1.73	1.31	0.81	0.46	0.25	0.14	0.08	0.04	0.02	10.4	9.32
-10	0.02	0.04	0.07	0.13	0.23	0.38	0.59	0.81	0.95	0.92	0.72	0.49	0.30	0.18	0.11	0.06	0.03	0.02	6.07	4.75
-15	0.02	0.03	0.06	0.10	0.16	0.24	0.33	0.42	0.47	0.46	0.38	0.28	0.19	0.12	0.08	0.05	0.03	0.02	3.42	1.45
-20	0.01	0.03	0.04	0.06	0.10	0.14	0.19	0.23	0.25	0.24	0.21	0.16	0.12	0.08	0.05	0.03	0.02	0.01	1.97	0.00
-25	0.01	0.02	0.03	0.04	0.06	0.08	0.11	0.12	0.13	0.13	0.11	0.09	0.07	0.05	0.03	0.02	0.02	0.01	1.14	0.00
-30	0.01	0.01	0.02	0.03	0.04	0.05	0.06	0.07	0.07	0.07	0.06	0.05	0.04	0.03	0.02	0.02	0.01	0.00	0.66	0.00
-35	0.00	0.01	0.01	0.02	0.02	0.03	0.03	0.04	0.04	0.04	0.04	0.03	0.03	0.02	0.01	0.01	0.00	0.00	0.39	0.00
-40	0.00	0.01	0.01	0.02	0.02	0.03	0.03	0.04	0.04	0.04	0.04	0.03	0.03	0.02	0.01	0.01	0.00	0.00	0.39	0.00
-45	0.00	0.01	0.01	0.02	0.02	0.03	0.03	0.04	0.04	0.04	0.04	0.03	0.03	0.02	0.01	0.01	0.00	0.00	0.39	0.00
	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)	10	15	20	25	30	35	40	45			
Φ t	0.33	0.60	1.09	1.96	3.51	6.30	10.8	16.3	19.8	19.0	14.5	9.14	5.19	2.91	1.64	0.93	0.52	0.29	115	---
Φ a	0.00	0.00	0.00	0.00	1.62	4.90	9.57	15.1	18.6	17.9	13.4	7.84	3.67	0.79	0.00	0.00	0.00	0.00	---	93


one-half-peak spread: U:11.4,D:12.4 , L:11.6,R:11.9 NEMA Beam Type: Type 4

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-02-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.17V I:0.1943A P:1.387W PF:0.5866 Freq:59.99Hz Lamp Flux:117.088x1 lm		
NAME: Nano	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

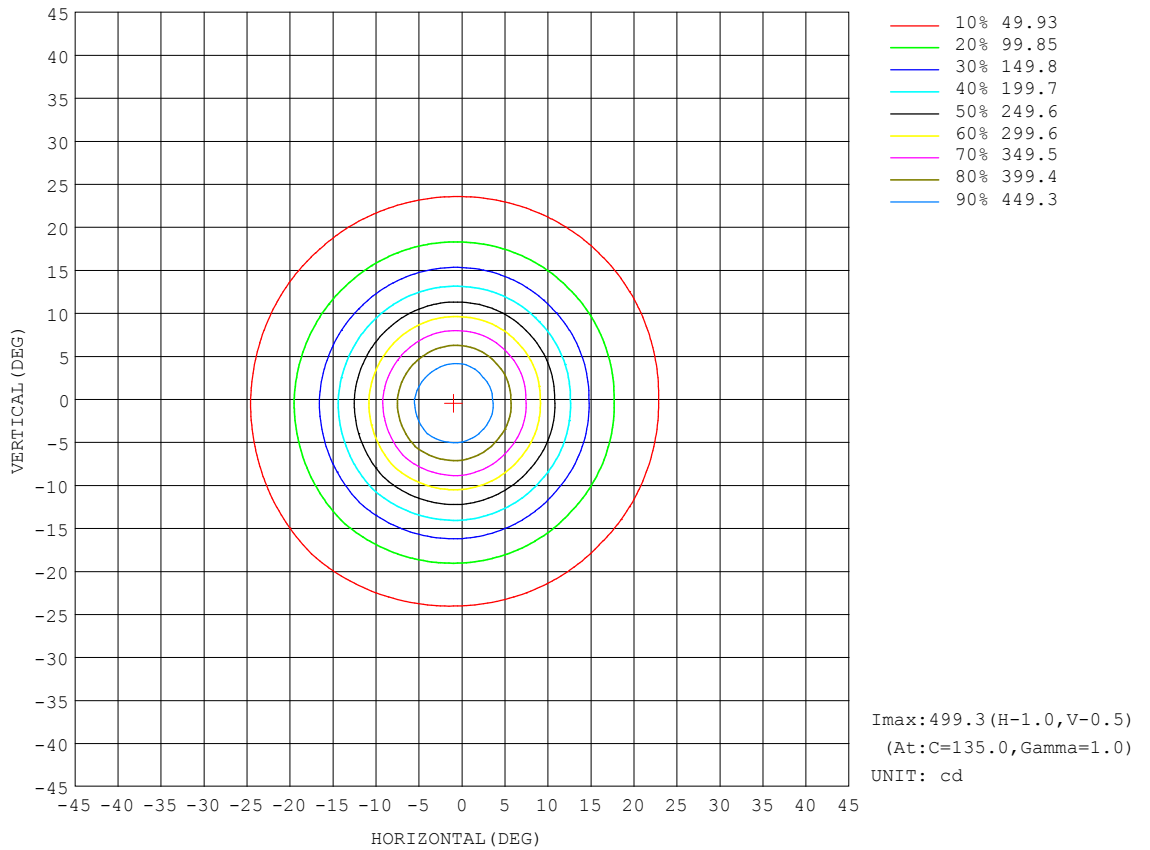


H(β) Range:-90 - 90DEG
 H(β) Interval: 0.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:ADMIN
 Test Date:2022-02-26

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
 Humidity:65.0%
 Test Distance:13.563m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM


Test:U:12.17V I:0.1943A P:1.387W PF:0.5866 Freq:59.99Hz Lamp Flux:117.088x1 lm		
NAME: Nano	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

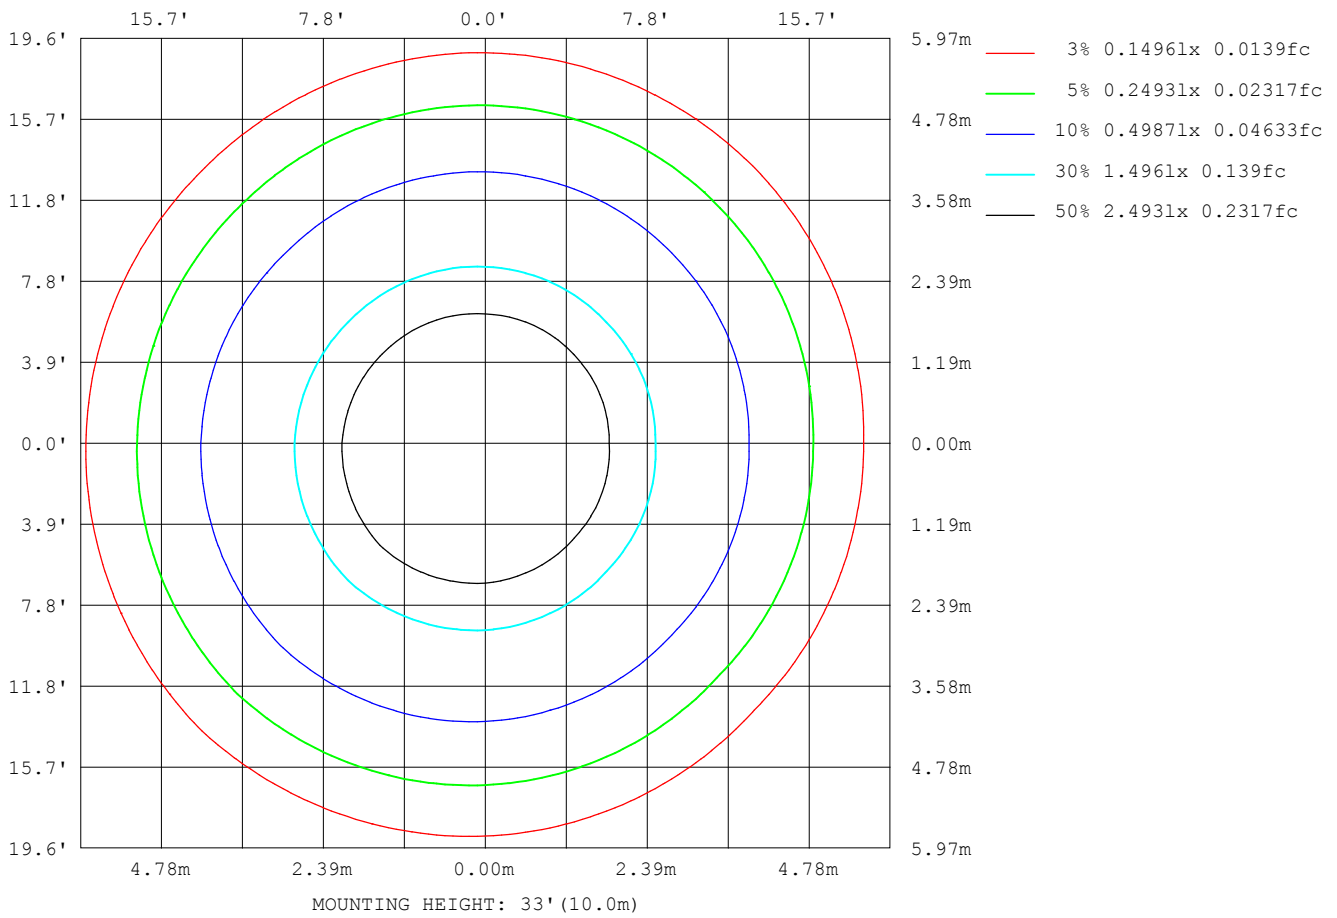

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-02-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

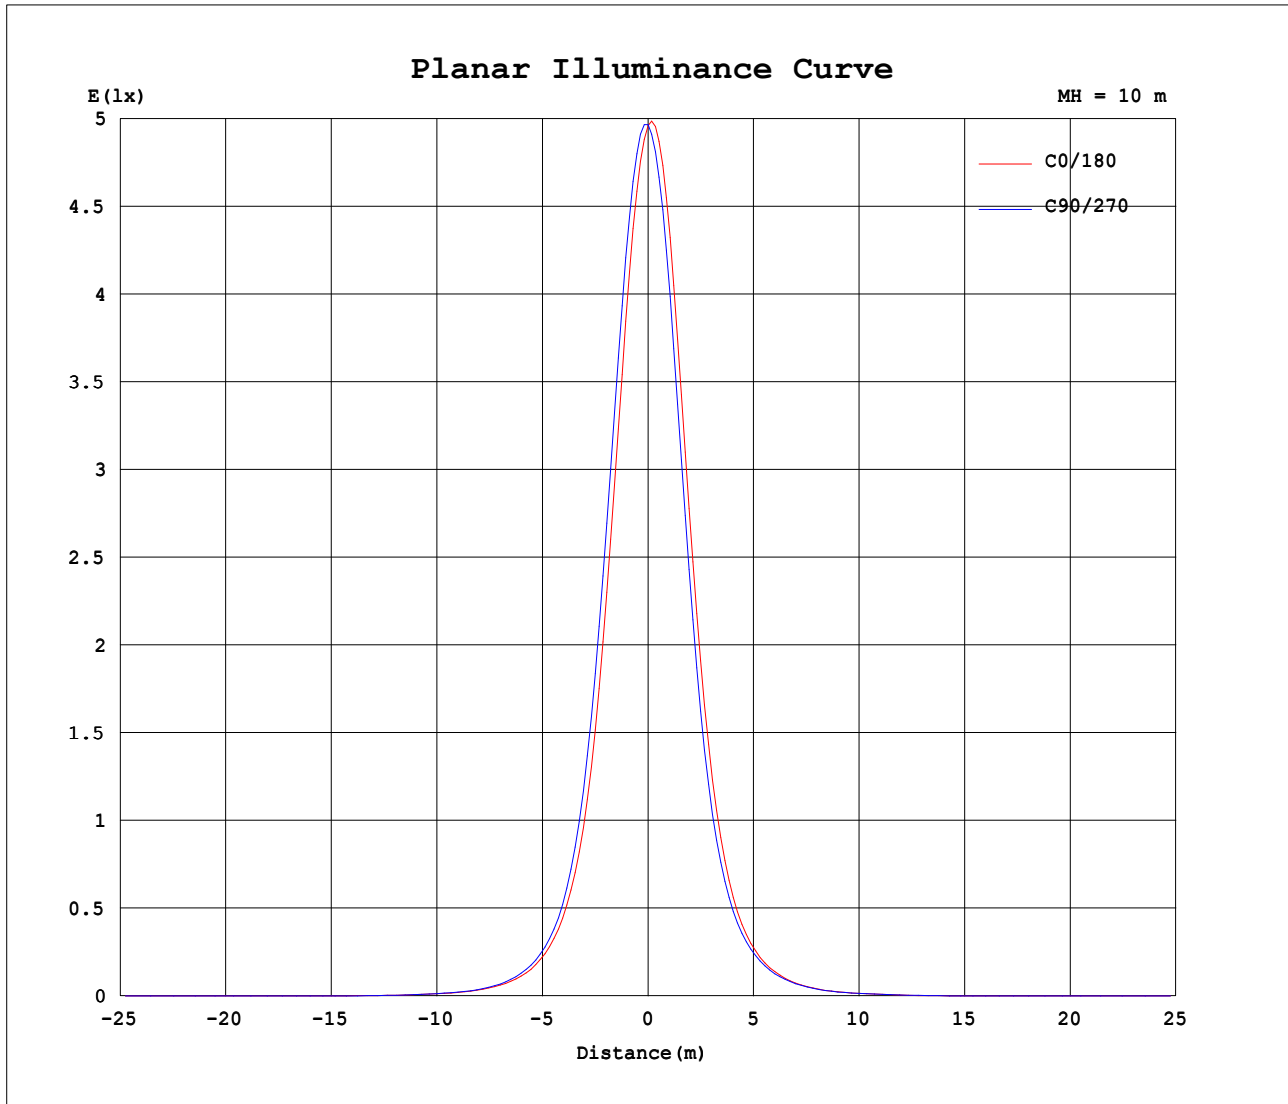


H(β) Range:-90 - 90DEG
 H(β) Interval: 0.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:ADMIN
 Test Date:2022-02-26

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
 Humidity:65.0%
 Test Distance:13.563m [K=1.0000]
 Remarks:

AAI Figure

Test:U:12.17V I:0.1943A P:1.387W PF:0.5866 Freq:59.99Hz Lamp Flux:117.088x1 lm		
NAME: Nano	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

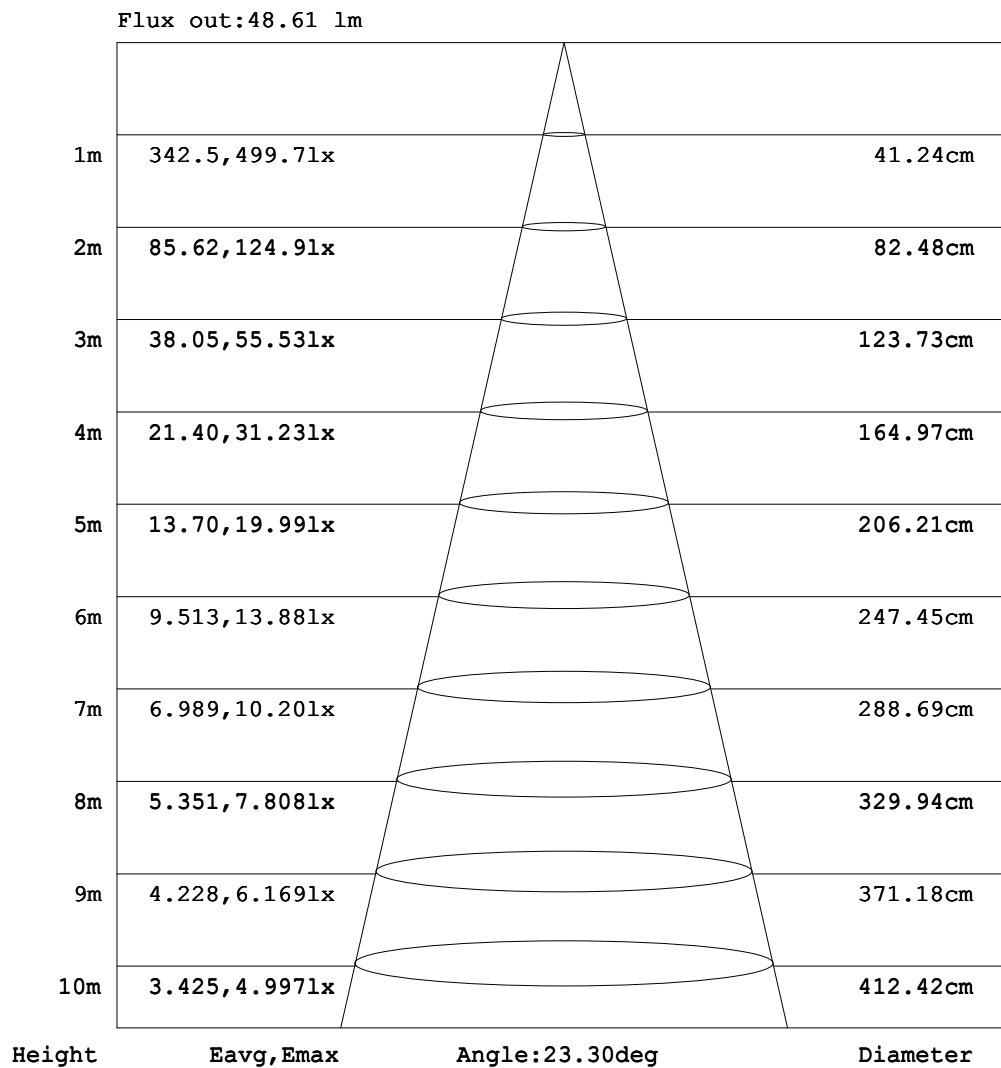

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-02-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.17V I:0.1943A P:1.387W PF:0.5866 Freq:59.99Hz Lamp Flux:117.088x1 lm		
NAME: Nano	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) \ V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.31	0.61	0.94	1.22	1.34	1.41	1.48
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.12	0.38	0.71	1.03	1.30	1.46	1.49	1.48
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.10	0.27	0.55	0.85	1.08	1.21	1.26	1.27
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.08	0.23	0.38	0.54	0.64	0.72	0.75
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.11	0.13	0.13
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.12	0.16	0.18	0.20	0.21
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.16	0.31	0.55	0.86	1.21	1.52	1.77	1.93	1.97
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.15	0.40	0.95	1.75	2.81	3.85	4.69	5.49	6.21	6.67	6.77
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.16	0.55	1.42	2.87	4.39	6.18	9.04	12.8	16.8	20.4	22.9	23.4
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.37	1.27	2.95	4.78	7.57	12.9	21.2	33.4	49.6	67.9	83.2	87.1
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.14	0.64	1.94	3.94	6.45	11.7	21.1	38.1	69.7	127	215	291	315
0	0.00	0.00	0.00	0.00	0.00	0.00	0.15	0.75	2.24	4.30	7.26	13.5	24.9	47.1	93.1	184	325	460	496
10	0.00	0.00	0.00	0.00	0.00	0.00	0.13	0.65	1.96	3.92	6.41	11.5	20.4	36.1	64.4	115	188	262	287
20	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.37	1.30	3.00	4.73	7.48	12.3	19.5	29.9	43.9	60.4	74.4	78.8
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.14	0.56	1.48	2.96	4.31	6.08	8.78	12.1	15.9	19.4	22.0	22.8
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.12	0.41	1.01	1.86	2.97	3.78	4.68	5.56	6.35	6.94	7.15	
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.12	0.29	0.58	0.97	1.36	1.74	2.07	2.30	2.39	
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.10	0.12	0.12	0.12	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.14	0.25	0.34	0.38	
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.20	0.41	0.64	0.83	0.96	1.01	
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.22	0.50	0.80	1.05	1.22	1.34	1.36	
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.31	0.61	0.94	1.22	1.34	1.41	1.47	

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-02-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.17V I:0.1943A P:1.387W PF:0.5866 Freq:59.99Hz Lamp Flux:117.088x1 lm		
NAME: Nano	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H (DEG) \ V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	1.44	1.50	1.42	1.36	1.16	0.85	0.47	0.15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-170	1.50	1.50	1.42	1.26	1.03	0.72	0.42	0.14	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-160	1.27	1.24	1.13	0.96	0.71	0.45	0.19	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-150	0.73	0.68	0.58	0.43	0.27	0.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-140	0.14	0.12	0.05	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.19	0.16	0.11	0.06	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	1.89	1.69	1.41	1.10	0.75	0.44	0.23	0.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	6.45	5.82	5.04	4.16	3.32	2.46	1.48	0.79	0.33	0.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	21.7	18.4	14.4	10.7	7.37	5.14	3.71	2.50	1.24	0.48	0.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-20	77.2	58.9	40.6	26.3	16.7	10.5	6.30	4.06	2.58	1.14	0.35	0.04	0.00	0.00	0.00	0.00	0.00	0.00
-10	264	175	101	55.1	30.4	17.0	9.76	5.49	3.40	1.73	0.61	0.12	0.00	0.00	0.00	0.00	0.00	0.00
0	418	273	145	72.8	37.9	20.3	11.3	6.22	3.75	2.00	0.72	0.15	0.00	0.00	0.00	0.00	0.00	0.00
10	246	165	97.2	54.9	30.9	17.5	10.1	5.67	3.49	1.80	0.64	0.13	0.00	0.00	0.00	0.00	0.00	0.00
20	71.7	56.8	40.7	27.4	17.8	11.2	6.81	4.28	2.75	1.23	0.39	0.06	0.00	0.00	0.00	0.00	0.00	0.00
30	21.6	18.8	15.3	11.6	8.41	5.73	4.04	2.80	1.43	0.57	0.15	0.00	0.00	0.00	0.00	0.00	0.00	0.00
40	6.89	6.25	5.42	4.52	3.66	2.89	1.84	0.98	0.44	0.14	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	2.30	2.06	1.73	1.35	0.96	0.59	0.31	0.14	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	0.13	0.12	0.10	0.05	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.36	0.29	0.18	0.07	0.00	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160	0.98	0.88	0.74	0.51	0.36	0.19	0.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
170	1.34	1.24	1.18	1.04	0.84	0.56	0.30	0.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
180	1.44	1.50	1.42	1.36	1.16	0.85	0.47	0.15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-02-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: