
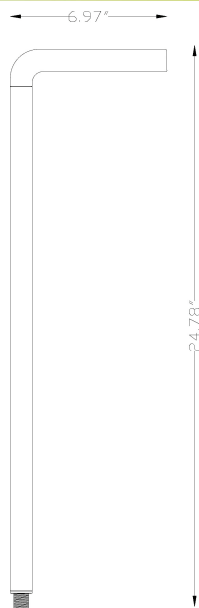


A9A3-6W-BK

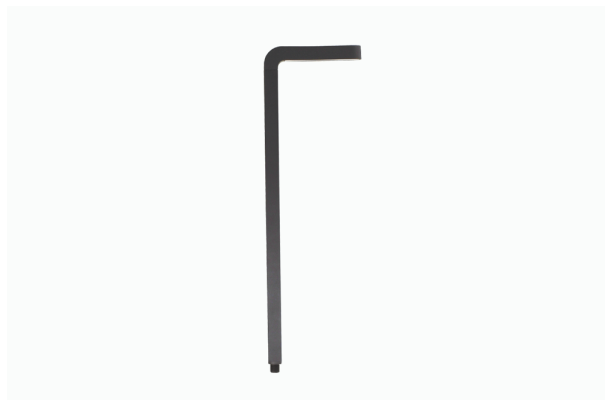

PROJECT: _____

TYPE: _____

CAT #: _____


DESCRIPTION

Area, LumienPRO - RGBTW, Aluminum - Black, L-Shape, 6W, 2700K-5700K: 324-361 Lm, R: 139 Lm, G: 290 Lm, B: 78 Lm, 10-15V

SPECIFICATIONS

Construction	Aluminum
Finish	Black
Lead Wire	6'
Voltage	10-15V
Mounting	LAP-002 (8" Stake)
Light Warranty	10 Years

FINISHES



Black

NOTES

Lumien Lighting

770-485-9002
orders@lumienlighting.com
www.lumienlighting.com

Lumien Lighting reserves the right to modify product specifications without notification. © 2023 Lumien Enterprise Inc.

MODULE TYPE (required)	WATTS	COLOR TEMP	BEAM SPREAD	FINISH	ACCESSORIES
---------------------------	-------	---------------	----------------	--------	-------------

A9A3-6W-BK

+

CORE: A3A3

- - - -
6W 2700K 3000K 80° BK BZ

+

A9A3-6W-BK

+

PRO: A9A3

- - - -
6W 2700-5700K 80° BK BZ

+

Additional Mounts - Ground (Optional)

- LAS-002** Stainless Steel, Trident Stake, 12"
- LAS-002-6** Stainless Steel, Trident Stake, 6"
- LAS-003** Stainless Steel, 1/2" Threaded Mini Stake,
- LAP-001** Plastic, 1/2" Threaded 12" Spike
- LAP-005** Plastic, 1/2" Threaded 15" Commercial
- LAP-018** Plastic, 1/2" Threaded 8" Spike w/ ADJ

Additional Mounts - Surface Mount (Optional)

- LAA-001** BZ Aluminum, 1/2" Threaded Base
- LAA-001-BK** BK Aluminum, 1/2" Threaded Base
- LAA-002** BZ Aluminum, 1/2" Threaded J-Box
- LAA-002-BK** BK Aluminum, 1/2" Threaded J-Box

Secondary Mounts - Risers (Optional)

- LAA-008** BZ Aluminum, 1/2" ADJ 16-25" Riser
- LAA-008-BK** BK Aluminum, 1/2" ADJ 16-25" Riser
- LAA-020** BZ Aluminum, 1/2" Threaded 4" Riser
- LAA-020-BK** BK Aluminum, 1/2" Threaded 4" Riser
- LAA-005** BZ Aluminum, 1/2" Threaded 8" Riser
- LAA-005-BK** BK Aluminum, 1/2" Threaded 8" Riser
- LAA-006** BZ Aluminum, 1/2" Threaded 16" Riser
- LAA-006-BK** BK Aluminum, 1/2" Threaded 16" Riser
- LAA-007** BZ Aluminum, 1/2" Threaded 24" Riser
- LAA-007-BK** BK ALuminum, 1/2" Threaded 24" Riser

Accessories - Pro Series (Optional)

- LP-REMOTE** LumienPRO Remote

CORE

A3A3-6W-27K-BK

A3A3-6W-27K-BZ

A3A3-6W-30K-BK

A3A3-6W-30K-BZ

PRO

A9A3-6W-BK

A9A3-6W-BZ

Construction	Aluminum	Aluminum
Finish	Black, Bronze	Black, Bronze
Input Voltage	10-15V	10-15V
Wattage (Volt Amps)	6W (9.76)	6W (9.11)
Module Lumens	467 Lm, 486 Lm	27K-57K: 324-361 Lm, R:
Color Temperature	2700K, 3000K	2700-5700K
Beam Spread	80°	80°
Lead Wire Length	6' 6"	6'
CRI	80+	80+
RGB	No	Yes
Dimmable	No	With LumienPRO Remote
Rated Life	50,000 Hrs	50,000 Hrs
Warranty	10 Years	10 Years
Core Drill Size	-	-

Additional Mounts - Ground



LAS-002

Accessory, Stainless Steel,
Trident Stake, 12"



LAS-002-6

Accessory, Stainless Steel,
Trident Stake, 6"



LAS-003

Accessory, Stainless Steel,
1/2" Threaded Mini Stake, 6"



LAP-001

Accessory, Plastic, 1/2"
Threaded 12" Spike



LAP-005

Accessory, Plastic, 1/2"
Threaded 15" Commercial
Spike

LAP-018

Accessory, Plastic, 1/2"
Threaded 8" Spike with
Adjustable Collar

Additional Mounts - Surface Mount



LAA-001

Accessory, Aluminum -
Bronze, 1/2" Threaded Base



LAA-001-BK

Accessory, Aluminum -
Black, 1/2" Threaded Base



LAA-002

Accessory, Aluminum -
Bronze, 1/2" Threaded
Junction Box



LAA-002-BK

Accessory, Aluminum -
Black, 1/2" Threaded
Junction Box

Secondary Mounts - Risers



LAA-008

Accessory, Aluminum -
Bronze, 1/2" Adjustable
16-25" Riser




LAA-008-BK

Accessory, Aluminum -
Black, 1/2" Adjustable
16-25" Riser



LAA-020

Accessory, Aluminum -
Bronze, 1/2" Threaded 4"
Riser



LAA-020-BK

Accessory, Aluminum -
Black, 1/2" Threaded 4"
Riser



LAA-005

Accessory, Aluminum -
Bronze, 1/2" Threaded 8"
Riser



LAA-005-BK

Accessory, Aluminum -
Black, 1/2" Threaded 8"
Riser




LAA-006

Accessory, Aluminum -
Bronze, 1/2" Threaded 16"
Riser

LAA-006-BK

Accessory, Aluminum -
Black, 1/2" Threaded 16"
Riser



LAA-007

Accessory, Aluminum -
Bronze, 1/2" Threaded 24"
Riser

LAA-007-BK

Accessory, Aluminum -
Black, 1/2" Threaded 24"
Riser

Accessories - Pro Series



LP-REMOTE

LumienPRO Remote
(Functionality determined
by the Light Fixture)