

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		2158.5 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of I _{max} At 50% of I _{max} At 90% of I _{max}	60.5V x 60.3H 38.1V x 38.3H 19.8V x 19.8H
Beam Flux	Total To 10% of I _{max} To 50% of I _{max} To 90% of I _{max}	1000.3 lumens per klm. 845.4 lumens per klm. 581.8 lumens per klm. 187.7 lumens per klm.
	Upward LOR Downward LOR	1.4 % 98.7 %
Luminaire Efficiency (Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:24 May 2022

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.15V I:0.6572A P:7.271W PF:0.9104 Freq:59.97Hz Lamp Flux:697.009x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot light	WEIGHT:
SPEC.:8W 3000K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:NON SHROUD

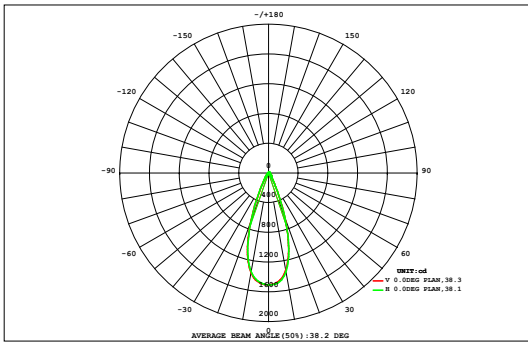

DATA OF LAMP		Eff:95.86lm/W	
MODEL	D5A1-8W-30K-BZ	Imax (cd)	1504
NOMINAL POWER (W)	8	AVAILABILITY (%)	84.5
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	588.7
NOMINAL FLUX (lm)	697.009	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	697.0
TEST VOLTAGE (V)	12	θ @50% (H, V)	38,38DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a	
	0.06	0.09	0.12	0.16	0.20	0.24	0.28	0.31	0.32	0.32	0.31	0.28	0.24	0.20	0.15	0.12	0.08	0.05	3.53	0.00	
45	0.06	0.09	0.12	0.16	0.20	0.24	0.28	0.31	0.32	0.32	0.31	0.28	0.24	0.20	0.15	0.12	0.08	0.05	3.53	0.00	
40	0.08	0.12	0.17	0.23	0.30	0.37	0.44	0.49	0.52	0.51	0.48	0.43	0.36	0.29	0.22	0.16	0.12	0.08	5.37	0.00	
35	0.11	0.16	0.24	0.33	0.44	0.56	0.68	0.79	0.86	0.85	0.78	0.67	0.54	0.42	0.31	0.22	0.15	0.10	8.23	0.00	
30	0.14	0.21	0.31	0.45	0.63	0.86	1.16	1.48	1.67	1.67	1.46	1.14	0.84	0.61	0.43	0.30	0.20	0.13	13.7	7.31	
25	0.17	0.27	0.40	0.61	0.93	1.49	2.30	3.09	3.56	3.53	3.03	2.23	1.44	0.90	0.59	0.39	0.25	0.16	25.3	20.9	
20	0.20	0.32	0.50	0.81	1.47	2.68	4.25	5.65	6.43	6.39	5.54	4.10	2.55	1.40	0.78	0.48	0.30	0.19	44.1	40.4	
15	0.23	0.37	0.61	1.09	2.25	4.24	6.49	8.26	9.14	9.10	8.13	6.28	4.01	2.11	1.03	0.58	0.35	0.21	64.5	61.3	
10	0.25	0.41	0.70	1.39	3.07	5.65	8.23	9.98	10.8	10.7	9.85	7.99	5.35	2.84	1.30	0.66	0.39	0.23	79.8	76.8	
5	0.26	0.44	0.75	1.60	3.60	6.47	9.10	10.7	11.3	11.3	10.6	8.83	6.10	3.30	1.48	0.71	0.41	0.24	87.2	84.4	
0	0.26	0.44	0.76	1.61	3.62	6.50	9.12	10.7	11.3	11.3	10.6	8.85	6.13	3.32	1.49	0.71	0.41	0.24	87.3	84.4	
-5	0.25	0.42	0.70	1.41	3.12	5.72	8.30	9.99	10.7	10.7	9.87	8.06	5.42	2.89	1.32	0.67	0.39	0.23	80.2	77.3	
-10	0.23	0.38	0.61	1.11	2.31	4.36	6.64	8.39	9.25	9.21	8.26	6.43	4.13	2.17	1.05	0.59	0.36	0.21	65.7	62.6	
-15	0.20	0.33	0.52	0.83	1.52	2.80	4.44	5.89	6.70	6.66	5.78	4.29	2.67	1.45	0.80	0.49	0.31	0.19	45.9	42.2	
-20	0.17	0.27	0.42	0.62	0.96	1.56	2.43	3.31	3.84	3.82	3.24	2.36	1.51	0.93	0.60	0.40	0.26	0.16	26.9	22.5	
-25	0.14	0.22	0.33	0.47	0.65	0.90	1.23	1.58	1.81	1.80	1.56	1.21	0.88	0.63	0.45	0.31	0.21	0.13	14.5	8.41	
-30	0.11	0.17	0.25	0.34	0.46	0.59	0.72	0.83	0.91	0.91	0.83	0.71	0.57	0.45	0.33	0.24	0.16	0.11	8.68	0.14	
-35	0.09	0.13	0.18	0.25	0.32	0.40	0.47	0.53	0.56	0.56	0.52	0.46	0.39	0.31	0.24	0.17	0.12	0.08	5.77	0.00	
-40	0.06	0.09	0.13	0.17	0.22	0.26	0.31	0.34	0.36	0.36	0.34	0.30	0.26	0.21	0.17	0.12	0.09	0.06	3.84	0.00	
-45	0.06	0.09	0.13	0.17	0.22	0.26	0.31	0.34	0.36	0.36	0.34	0.30	0.26	0.21	0.17	0.12	0.09	0.06	3.84	0.00	
	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)	10	15	20	25	30	35	40	45				
Φ t	3.01	4.84	7.70	13.5	26.0	45.7	66.6	82.3	90.0	89.7	81.1	64.6	43.4	24.4	12.8	7.33	4.55	2.80	670	---	
Φ a	0.00	0.00	0.00	7.50	21.4	41.5	62.8	78.8	86.6	86.2	77.6	60.8	39.3	19.7	6.57	0.00	0.00	0.00	---	589	


one-half-peak spread: U:20.4,D:17.9 , L:19.6,R:18.9 NEMA Beam Type: Type 4

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:24 May 2022

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.15V I:0.6572A P:7.271W PF:0.9104 Freq:59.97Hz Lamp Flux:697.009x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot light	WEIGHT:
SPEC.:8W 3000K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:NON SHROUD

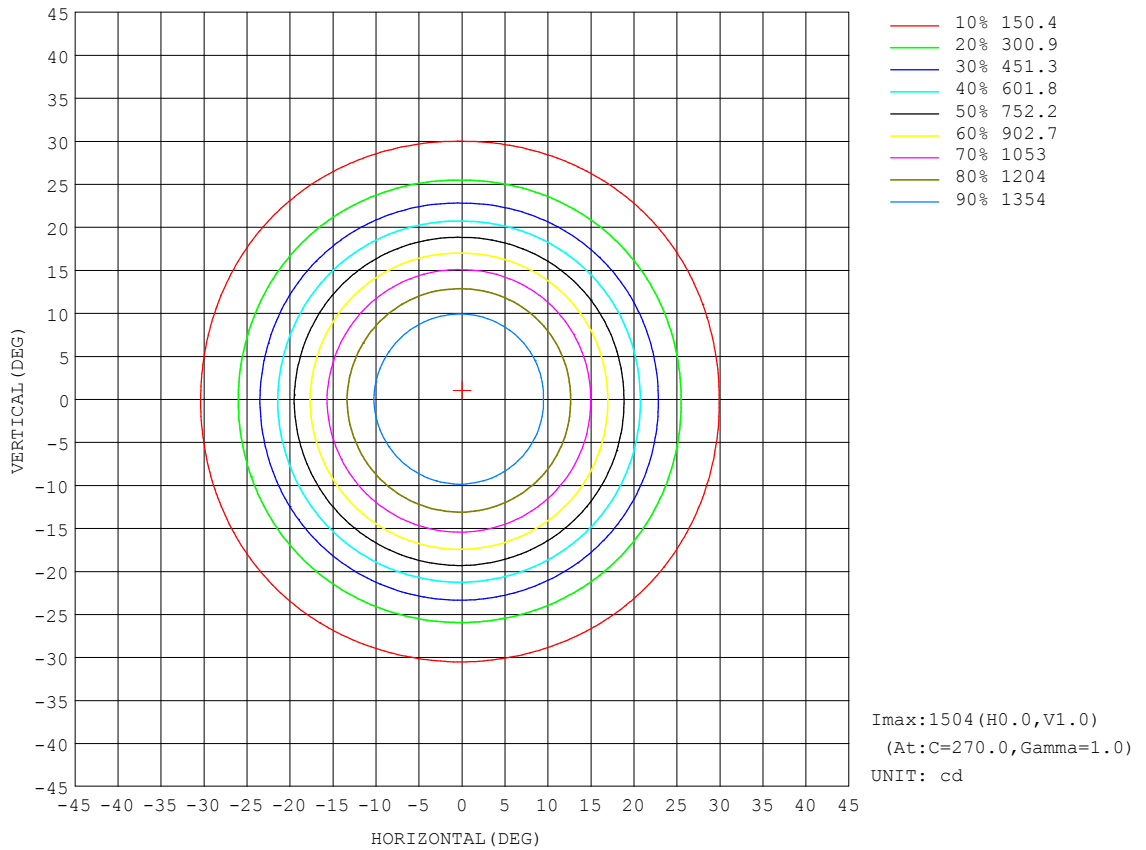


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:24 May 2022

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.15V I:0.6572A P:7.271W PF:0.9104 Freq:59.97Hz Lamp Flux:697.009x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot light	WEIGHT:
SPEC.:8W 3000K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:NON SHROUD

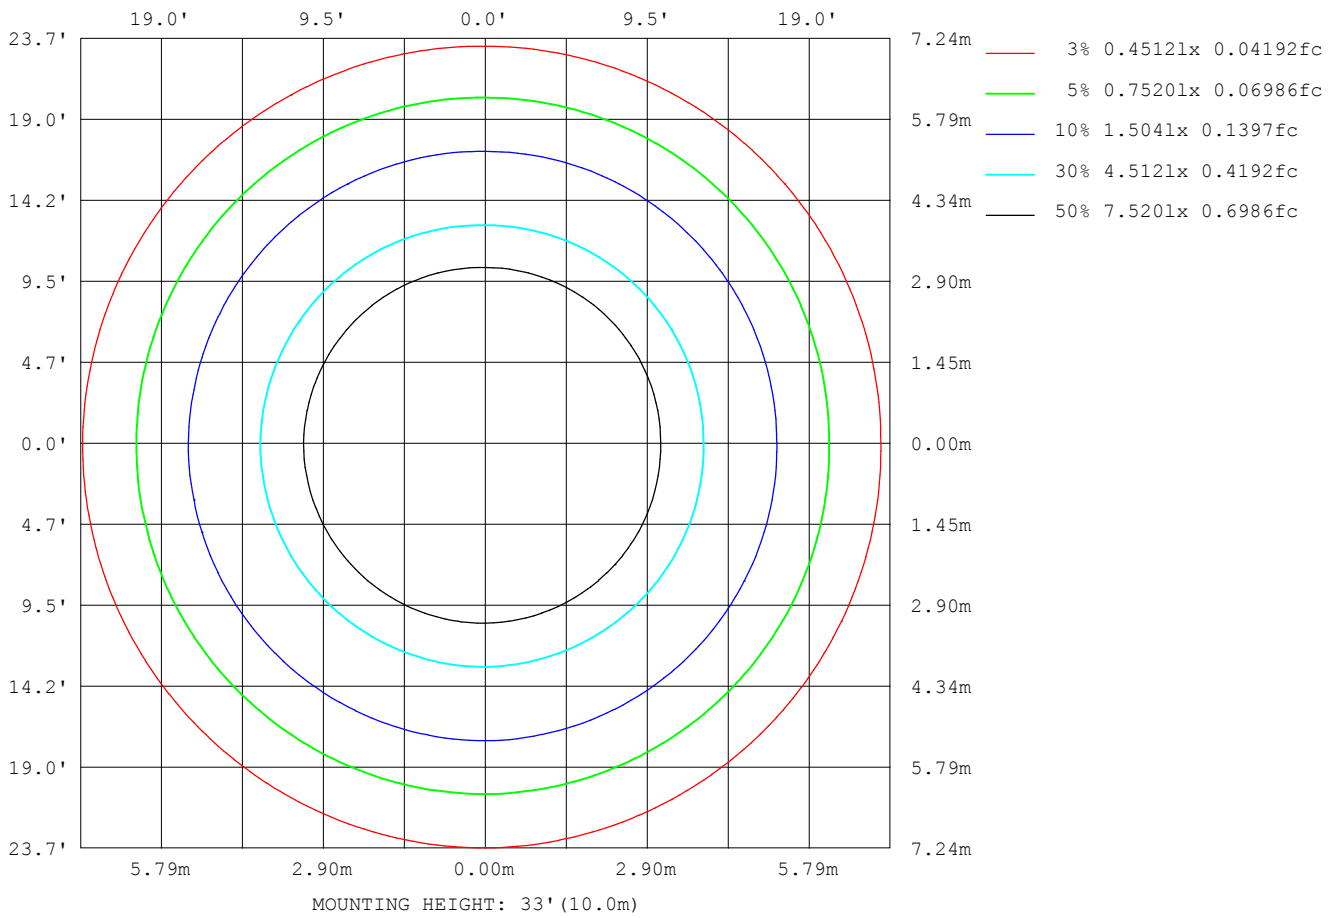

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:24 May 2022

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

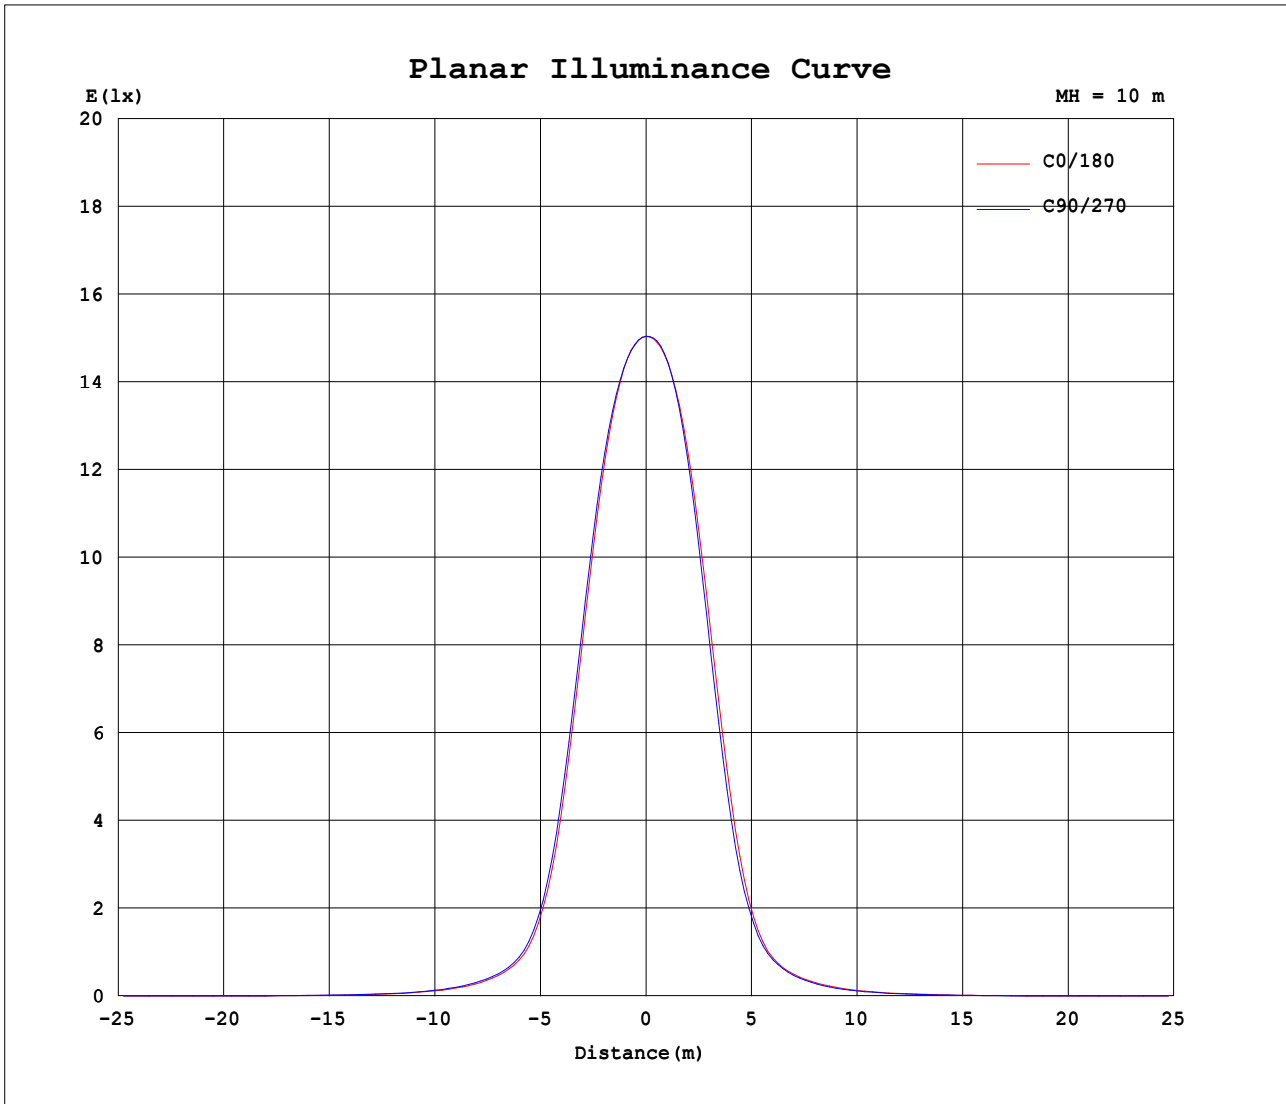


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:24 May 2022

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.15V I:0.6572A P:7.271W PF:0.9104 Freq:59.97Hz Lamp Flux:697.009x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot light	WEIGHT:
SPEC.:8W 3000K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:NON SHROUD

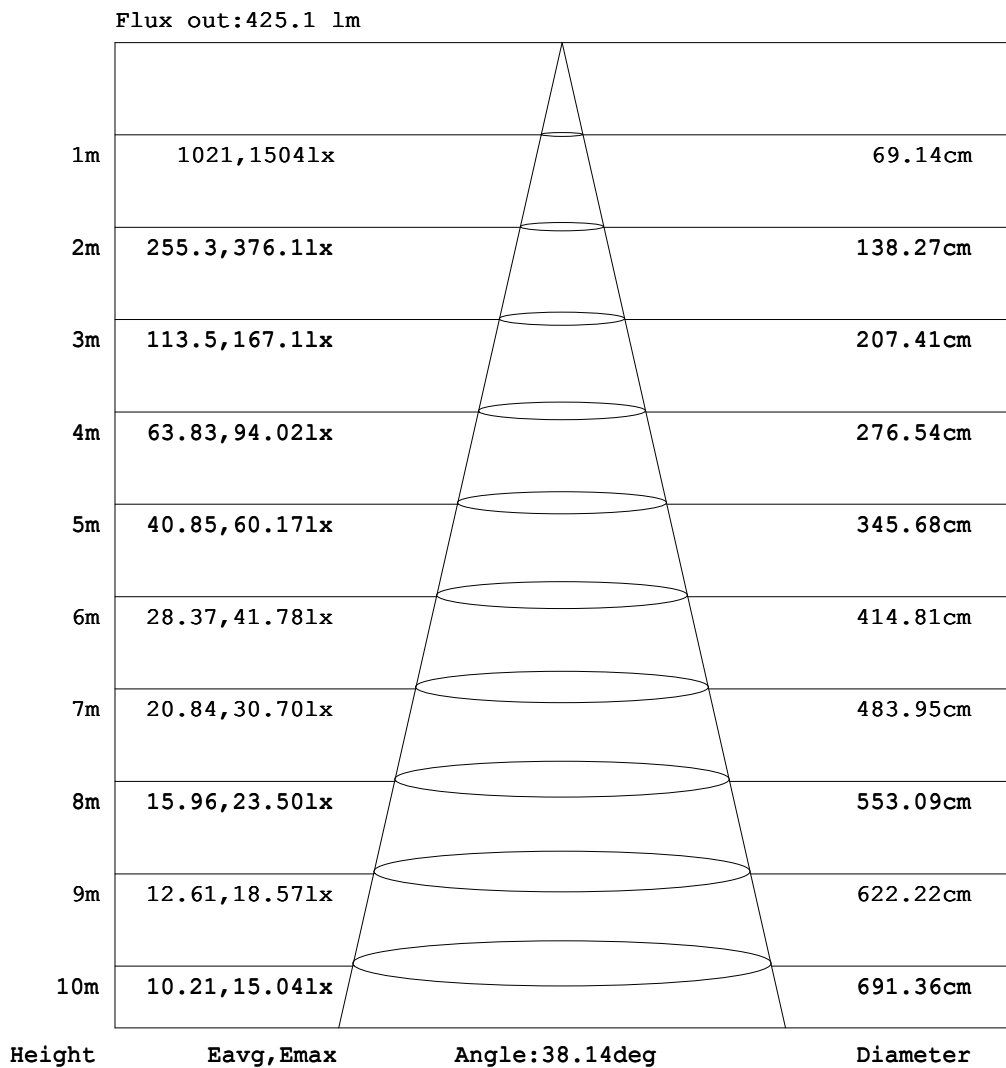

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:24 May 2022

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.15V I:0.6572A P:7.271W PF:0.9104 Freq:59.97Hz Lamp Flux:697.009x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot light	WEIGHT:
SPEC.:8W 3000K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:NON SHROUD

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.25	0.66	1.39	2.44	3.76	5.20	6.60	7.76	8.67	9.40	9.84
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.05	0.28	0.69	1.38	2.41	3.69	5.12	6.52	7.74	8.64	9.24	9.62
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.20	0.52	1.07	1.87	2.90	4.06	5.26	6.37	7.32	8.00	8.44
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.09	0.29	0.61	1.11	1.76	2.52	3.34	4.13	4.81	5.33	5.65
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.05	0.11	0.26	0.47	0.76	1.14	1.56	1.97	2.34	2.64	2.82
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.07	0.13	0.21	0.34	0.46	0.60	0.74	0.84	0.91
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.05	0.08	0.11	0.13	0.15	0.16
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.08	0.15	0.25	0.40	0.55	0.68	0.78	0.85	0.87
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.18	0.54	1.05	1.70	2.49	3.39	4.33	5.22	6.13	6.76	7.15	7.29
-50	0.00	0.00	0.00	0.00	0.00	0.11	0.54	1.34	2.58	4.35	6.69	9.42	12.3	15.2	17.8	20.1	21.9	23.1	23.5
-40	0.00	0.00	0.00	0.00	0.07	0.57	1.66	3.59	6.67	10.8	15.6	21.0	27.1	33.9	41.0	47.8	53.5	57.4	58.8
-30	0.00	0.00	0.00	0.00	0.26	1.27	3.31	6.94	12.2	18.8	27.1	37.8	51.4	67.8	87.2	109	133	154	162
-20	0.00	0.00	0.00	0.01	0.54	2.02	5.11	10.5	17.7	27.2	40.8	59.8	86.8	130	218	365	533	656	699
-10	0.00	0.00	0.00	0.04	0.75	2.63	6.62	13.1	21.7	34.2	52.9	81.2	131	264	537	873	1152	1307	1350
0	0.00	0.00	0.00	0.06	0.82	2.85	7.12	14.0	23.3	37.0	57.8	90.5	158	356	713	1102	1364	1480	1504
10	0.00	0.00	0.00	0.04	0.74	2.59	6.53	12.9	21.5	33.8	52.2	80.2	130	259	524	858	1140	1301	1350
20	0.00	0.00	0.00	0.00	0.52	1.96	4.95	10.2	17.3	26.6	39.7	58.2	84.7	127	209	346	502	618	655
30	0.00	0.00	0.00	0.00	0.25	1.20	3.14	6.60	11.7	18.1	26.0	36.2	49.1	64.8	83.5	105	126	144	150
40	0.00	0.00	0.00	0.00	0.06	0.52	1.54	3.33	6.18	10.1	14.7	19.8	25.5	31.7	38.1	44.2	49.1	52.4	53.2
50	0.00	0.00	0.00	0.00	0.00	0.10	0.48	1.19	2.30	3.88	5.97	8.46	11.1	13.8	16.1	18.2	19.8	20.7	20.8
60	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.16	0.45	0.87	1.41	2.06	2.81	3.56	4.31	4.96	5.42	5.66	5.68
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.11	0.19	0.28	0.37	0.46	0.52	0.55	0.56
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.12	0.16	0.21	0.25	0.26
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.08	0.19	0.36	0.58	0.81	1.05	1.26	1.41	1.46
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.14	0.35	0.70	1.17	1.75	2.38	2.97	3.44	3.77
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.12	0.36	0.80	1.47	2.35	3.36	4.39	5.33	6.06	6.52	6.70
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.22	0.58	1.21	2.17	3.37	4.71	6.01	7.13	7.95	8.46	8.67
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.25	0.66	1.39	2.44	3.76	5.20	6.60	7.76	8.67	9.40	9.81

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:24 May 2022

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.15V I:0.6572A P:7.271W PF:0.9104 Freq:59.97Hz Lamp Flux:697.009x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot light	WEIGHT:
SPEC.:8W 3000K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:NON SHROUD

Table--2

UNIT: cd

H (DEG) \ V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	9.78	9.61	9.25	8.48	7.26	5.79	4.30	2.95	1.81	0.96	0.43	0.14	0.00	0.00	0.00	0.00	0.00	0.00
-170	9.55	9.33	8.84	7.96	6.72	5.32	3.95	2.68	1.64	0.86	0.39	0.13	0.00	0.00	0.00	0.00	0.00	0.00
-160	8.31	7.92	7.24	6.32	5.25	4.11	2.99	2.00	1.18	0.62	0.27	0.11	0.00	0.00	0.00	0.00	0.00	0.00
-150	5.55	5.24	4.73	4.08	3.33	2.55	1.81	1.16	0.68	0.35	0.14	0.02	0.00	0.00	0.00	0.00	0.00	0.00
-140	2.77	2.60	2.32	1.96	1.56	1.15	0.80	0.54	0.28	0.14	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-130	0.89	0.83	0.73	0.61	0.50	0.35	0.24	0.14	0.08	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-120	0.16	0.15	0.13	0.11	0.07	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.84	0.76	0.65	0.51	0.36	0.22	0.14	0.08	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	7.08	6.63	5.93	5.02	4.11	3.19	2.33	1.58	0.95	0.45	0.15	0.05	0.00	0.00	0.00	0.00	0.00	0.00
-50	23.0	21.7	19.7	17.3	14.6	11.7	8.77	6.15	3.94	2.32	1.20	0.43	0.11	0.01	0.00	0.00	0.00	0.00
-40	57.0	52.8	46.9	39.9	32.7	26.0	19.9	14.6	9.85	5.96	3.17	1.47	0.44	0.08	0.00	0.00	0.00	0.00
-30	153	131	107	85.1	65.6	49.3	35.9	25.4	17.4	11.1	6.12	2.86	1.09	0.18	0.01	0.00	0.00	0.00
-20	647	518	350	209	125	83.3	56.8	38.2	25.3	16.1	9.24	4.41	1.74	0.40	0.04	0.00	0.00	0.00
-10	1296	1128	837	501	247	125	76.7	49.5	31.6	19.8	11.6	5.65	2.22	0.60	0.06	0.00	0.00	0.00
0	1470	1334	1051	659	323	148	85.0	53.6	33.8	21.1	12.3	6.08	2.38	0.66	0.07	0.00	0.00	0.00
10	1291	1116	822	489	242	124	75.7	48.8	31.2	19.6	11.4	5.55	2.18	0.59	0.06	0.00	0.00	0.00
20	610	487	332	200	122	81.1	55.1	37.2	24.6	15.7	8.94	4.26	1.68	0.38	0.04	0.00	0.00	0.00
30	143	125	103	81.4	62.5	47.0	34.3	24.4	16.7	10.6	5.78	2.70	1.03	0.17	0.01	0.00	0.00	0.00
40	52.0	48.5	43.3	37.0	30.5	24.4	18.7	13.7	9.12	5.47	2.90	1.34	0.40	0.07	0.00	0.00	0.00	0.00
50	20.5	19.5	17.8	15.6	13.2	10.5	7.81	5.42	3.46	2.04	1.05	0.37	0.09	0.01	0.00	0.00	0.00	0.00
60	5.59	5.29	4.77	4.10	3.34	2.61	1.90	1.29	0.77	0.36	0.13	0.04	0.00	0.00	0.00	0.00	0.00	0.00
70	0.55	0.50	0.43	0.33	0.23	0.16	0.09	0.04	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.01	0.02	0.02	0.03	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.30	0.30	0.28	0.27	0.22	0.14	0.11	0.07	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	1.54	1.51	1.39	1.21	1.00	0.74	0.52	0.37	0.18	0.09	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	3.99	3.87	3.57	3.12	2.55	1.96	1.40	0.90	0.52	0.26	0.11	0.01	0.00	0.00	0.00	0.00	0.00	0.00
160	6.83	6.66	6.20	5.45	4.55	3.57	2.59	1.72	1.02	0.54	0.23	0.10	0.00	0.00	0.00	0.00	0.00	0.00
170	8.78	8.64	8.23	7.45	6.30	5.00	3.70	2.51	1.54	0.80	0.36	0.13	0.00	0.00	0.00	0.00	0.00	0.00
180	9.78	9.61	9.25	8.48	7.26	5.79	4.30	2.95	1.81	0.96	0.43	0.14	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:24 May 2022

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: