

## Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		1152.3 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	74.1V x 159.6H
	At 50% of Imax	46.1V x 148.2H
	At 90% of Imax	9.4V x 14.1H
Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	966.9 lumens per klm.
	To 50% of Imax	400.6 lumens per klm.
	To 90% of Imax	114.1 lumens per klm.
	Upward LOR	0.3 %
	Downward LOR	99.7 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 0.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:ADMIN  
Test Date:2022-08-15

V(B) Range:-180 - 180DEG  
V(B) Interval: 0.5DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.352  
Humidity:65.0%  
Test Distance:13.563m [K=1.0000]  
Remarks:

## LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.12V I:0.3264A P:2.807W PF:0.7098 Freq:59.97Hz Lamp Flux:53.8022x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Step Light	WEIGHT:
SPEC.:3W 2700K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

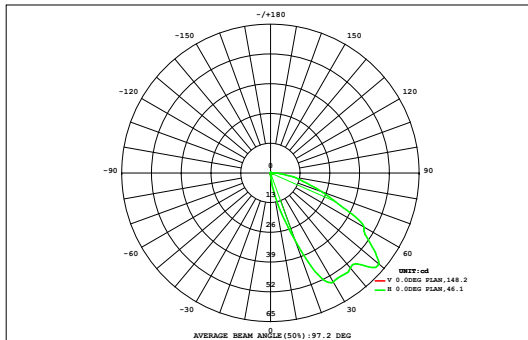

DATA OF LAMP		Eff:19.16lm/W	
MODEL	S3A1-3W-27K-BZ	Imax (cd)	61.99
NOMINAL POWER (W)	3	AVAILABILITY (%)	94.4
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	50.78
NOMINAL FLUX (lm)	53.8022	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	53.80
TEST VOLTAGE (V)	12	θ @50% (H,V)	148,46DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.01	0.02	0.04	0.07	0.10	0.12	0.14	0.14	0.13	0.11	0.08	0.06	0.03	0.01	0.00	0.00	1.06	0.28
90	0.00	0.01	0.03	0.08	0.17	0.26	0.35	0.42	0.47	0.47	0.41	0.33	0.24	0.15	0.08	0.03	0.01	0.00	3.52	3.26
80	0.00	0.01	0.06	0.15	0.32	0.50	0.66	0.84	1.00	1.00	0.85	0.67	0.50	0.32	0.14	0.05	0.01	0.00	7.09	6.94
70	0.00	0.02	0.07	0.21	0.41	0.65	0.91	1.20	1.50	1.51	1.22	0.92	0.65	0.43	0.22	0.07	0.02	0.00	9.99	9.88
60	0.00	0.02	0.09	0.23	0.42	0.62	0.91	1.27	1.60	1.61	1.31	0.98	0.68	0.43	0.24	0.09	0.02	0.00	10.5	10.4
50	0.00	0.02	0.09	0.21	0.35	0.53	0.86	1.20	1.51	1.47	1.10	0.85	0.60	0.39	0.21	0.09	0.02	0.00	9.49	9.40
40	0.00	0.02	0.07	0.16	0.26	0.48	0.76	0.92	1.21	1.18	0.76	0.56	0.47	0.30	0.17	0.07	0.02	0.00	7.41	7.29
30	0.00	0.01	0.05	0.10	0.17	0.34	0.40	0.32	0.43	0.45	0.30	0.27	0.27	0.20	0.11	0.05	0.01	0.00	3.48	3.17
20	0.00	0.00	0.02	0.04	0.06	0.12	0.11	0.06	0.06	0.08	0.09	0.08	0.09	0.07	0.04	0.02	0.01	0.00	0.95	0.16
10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.00
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.00
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.00
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90 -80 -70 -60 -50 -40 -30 -20 HORIZONTAL (DEG) 20 30 40 50 60 70 80 90																				
Φ t	0.00	0.10	0.48	1.22	2.23	3.57	5.06	6.35	7.93	7.91	6.18	4.79	3.60	2.35	1.25	0.50	0.12	0.01	54	---
Φ a	0.00	0.00	0.19	1.04	2.08	3.44	4.92	6.17	7.78	7.76	5.98	4.60	3.43	2.17	1.02	0.19	0.00	0.00	---	51


one-half-peak spread: U:10.1,D:17.2 , L:1.1,R:5.NEMA Beam Type: Type 7 x 5 (H x V)

H(β) Range:-90 - 90DEG  
H(β) Interval: 0.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:ADMIN  
Test Date:2022-08-15

V(B) Range:-180 - 180DEG  
V(B) Interval: 0.5DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.352  
Humidity:65.0%  
Test Distance:13.563m [K=1.0000]  
Remarks:

## ISOCANDELA DIAGRAM

Test:U:12.12V I:0.3264A P:2.807W PF:0.7098 Freq:59.97Hz Lamp Flux:53.8022x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Step Light	WEIGHT:
SPEC.:3W 2700K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

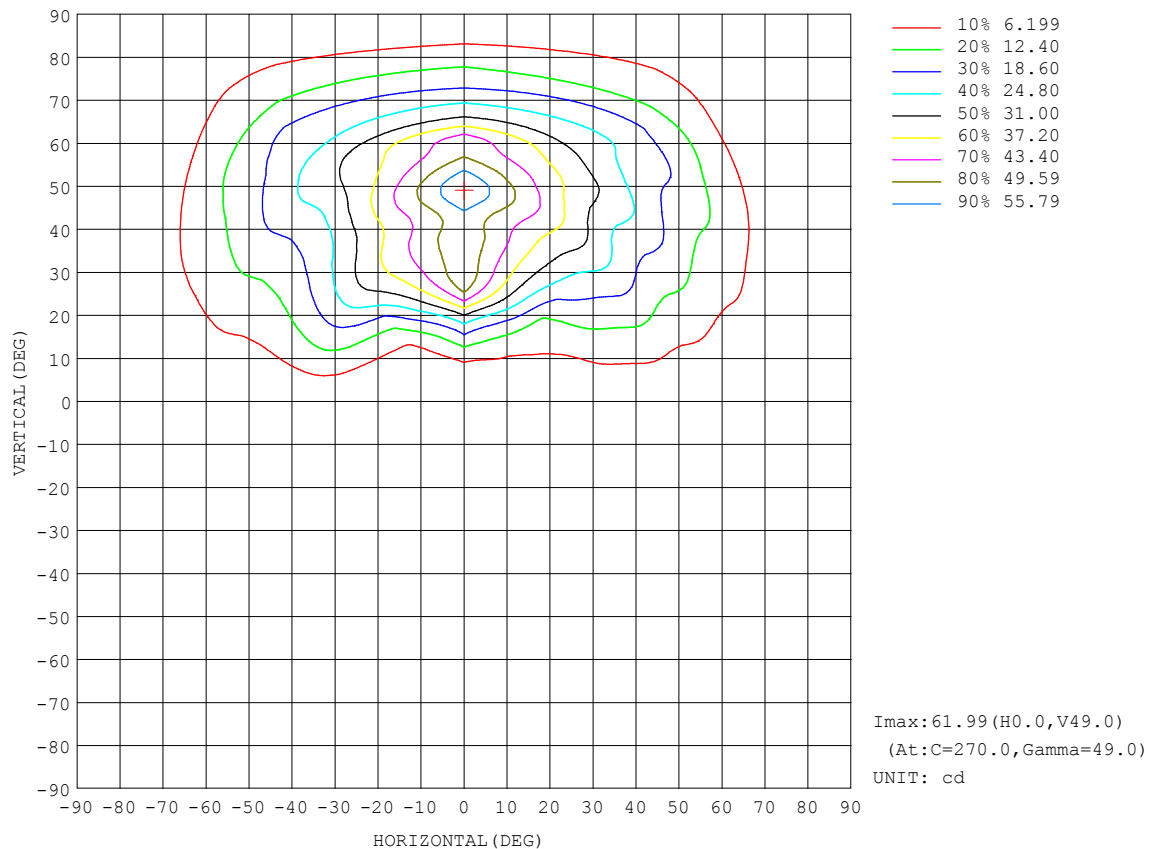


H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 0.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:ADMIN  
Test Date:2022-08-15

V(B) Range:-180 - 180DEG  
V(B) Interval: 0.5DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.352  
Humidity:65.0%  
Test Distance:13.563m [K=1.0000]  
Remarks:

## ISOLUX DIAGRAM


Test:U:12.12V I:0.3264A P:2.807W PF:0.7098 Freq:59.97Hz Lamp Flux:53.8022x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Step Light	WEIGHT:
SPEC.:3W 2700K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

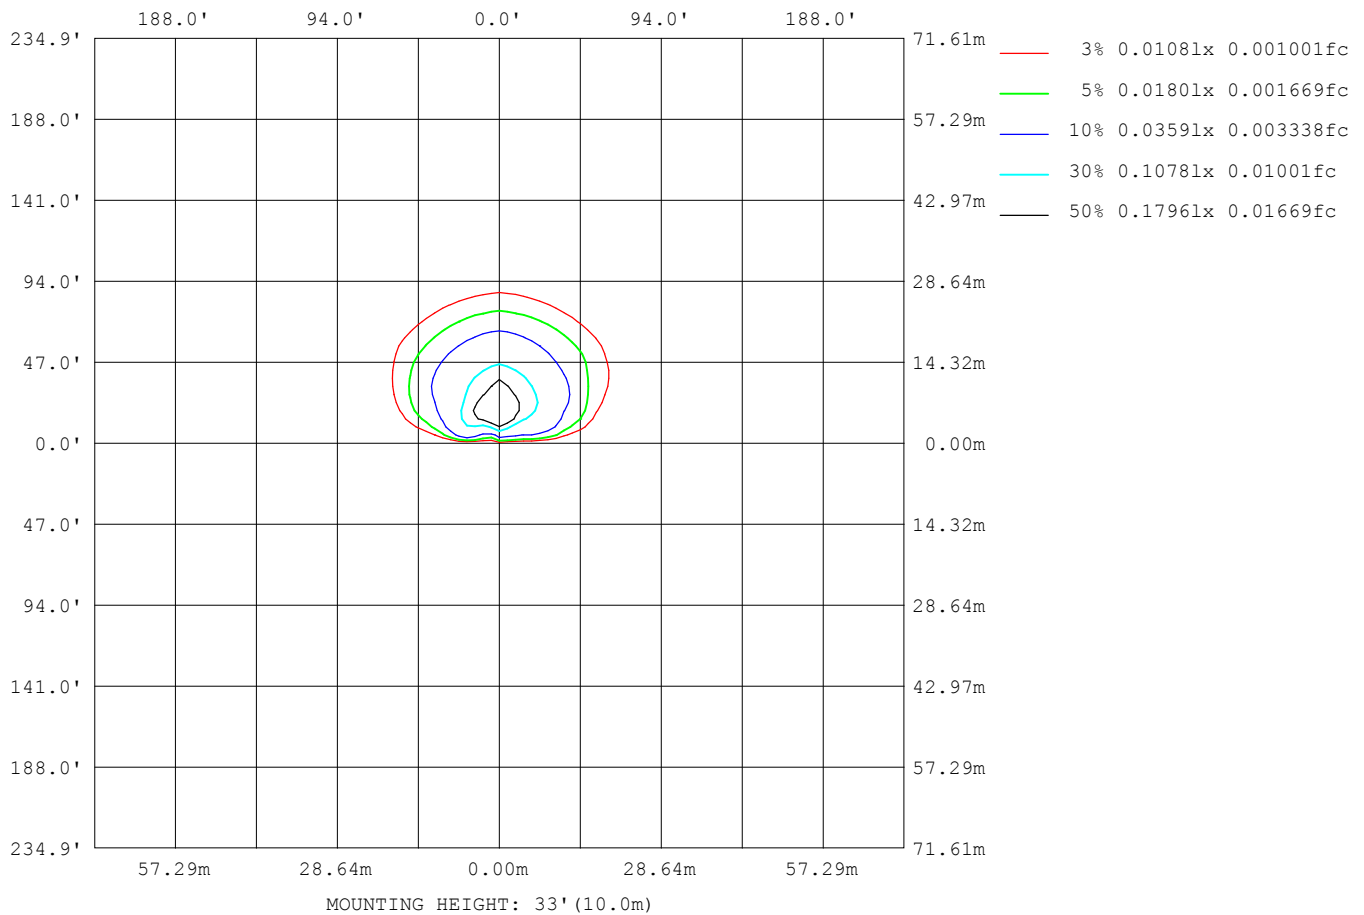

H( $\beta$ ) Range:-90 - 90DEG  
 H( $\beta$ ) Interval: 0.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:ADMIN  
 Test Date:2022-08-15

V(B) Range:-180 - 180DEG  
 V(B) Interval: 0.5DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.352  
 Humidity:65.0%  
 Test Distance:13.563m [K=1.0000]  
 Remarks:

## Planar Illuminance Curve

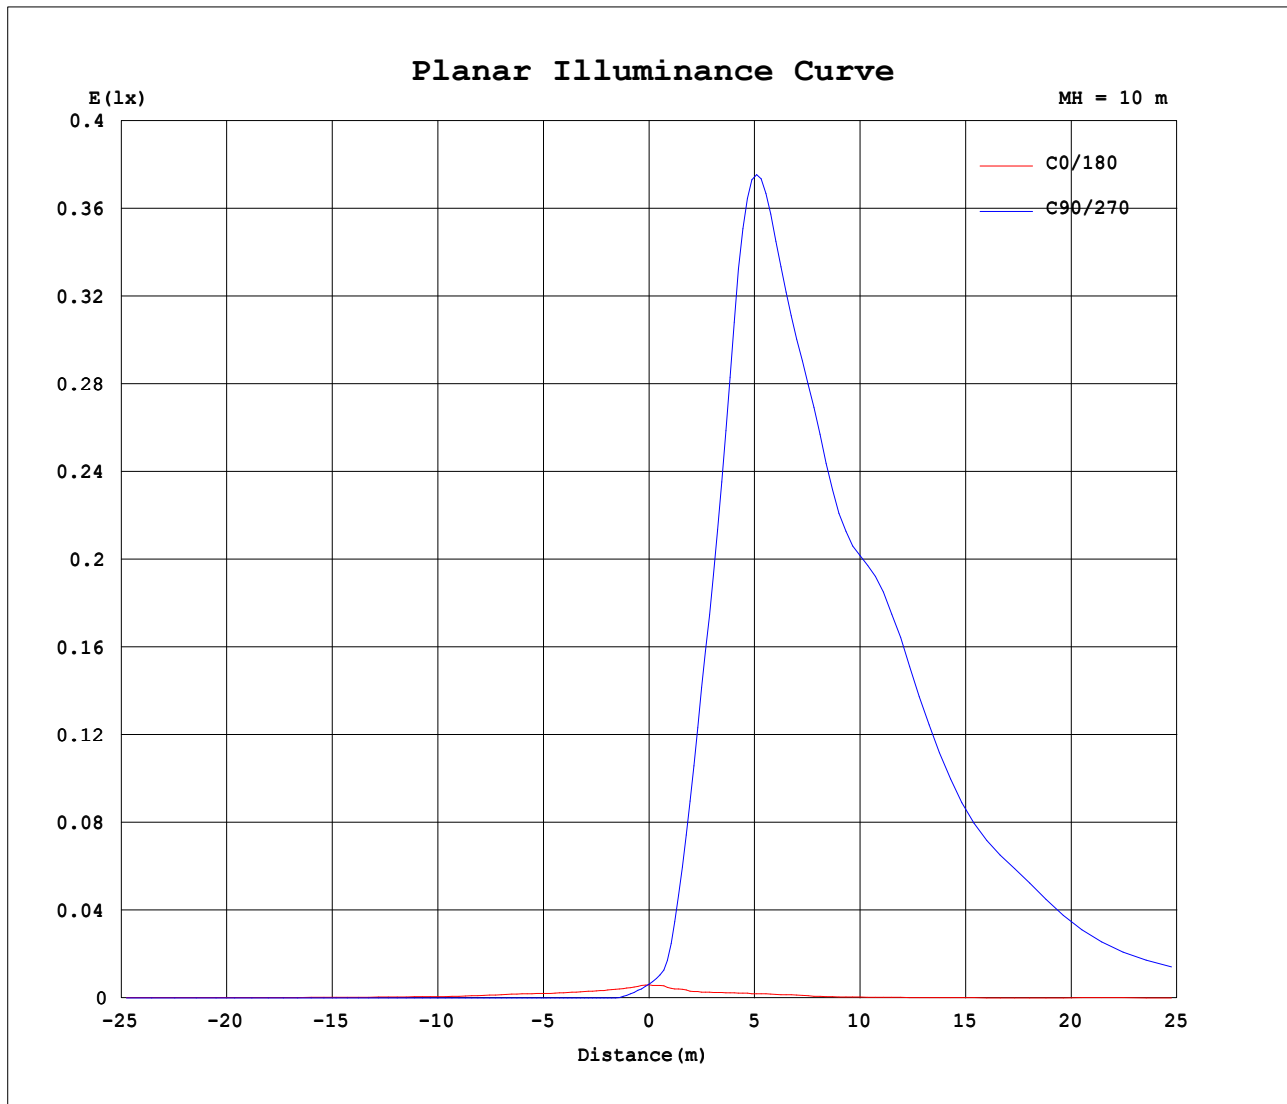


H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 0.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:ADMIN  
Test Date:2022-08-15

V(B) Range:-180 - 180DEG  
V(B) Interval: 0.5DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.352  
Humidity:65.0%  
Test Distance:13.563m [K=1.0000]  
Remarks:

### AAI Figure

Test:U:12.12V I:0.3264A P:2.807W PF:0.7098 Freq:59.97Hz Lamp Flux:53.8022x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Step Light	WEIGHT:
SPEC.:3W 2700K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

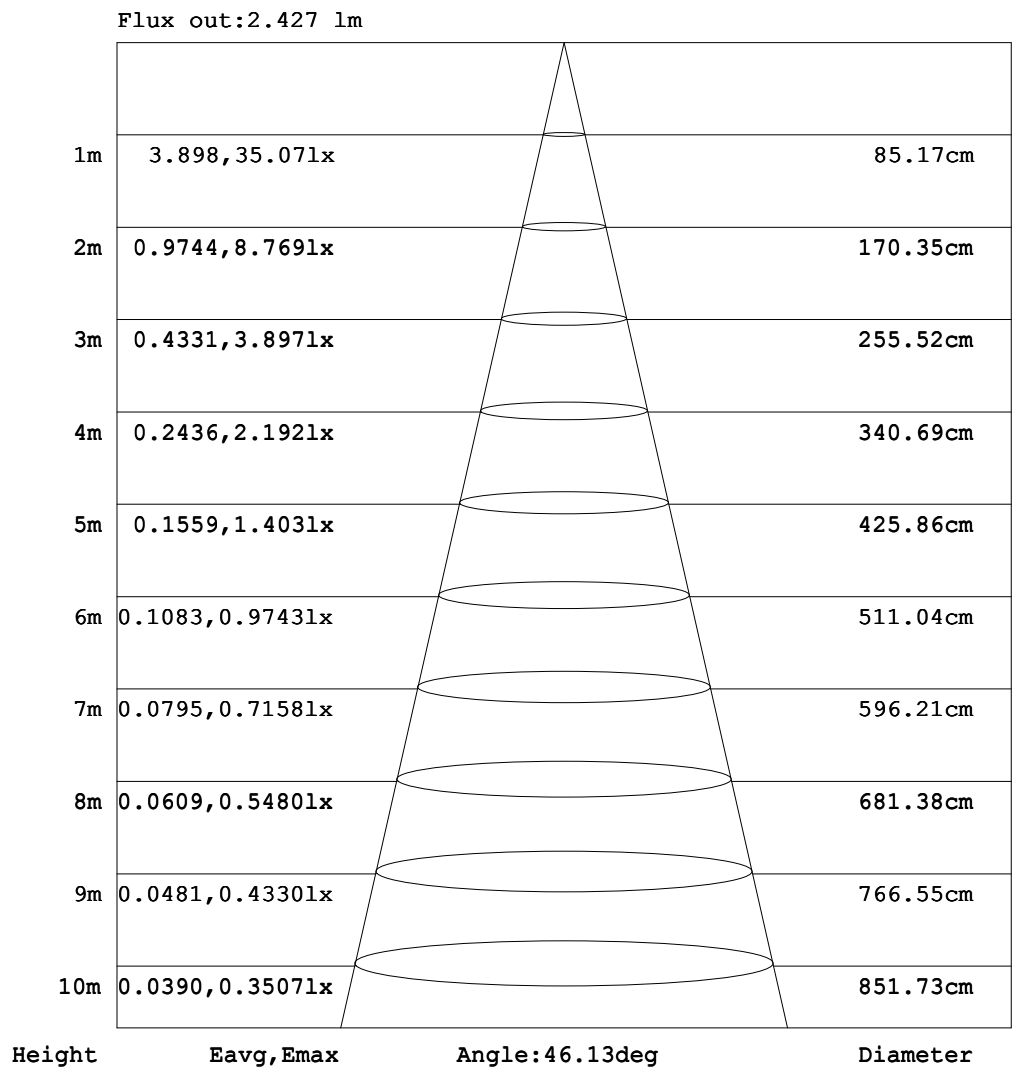

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 0.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:ADMIN  
Test Date:2022-08-15

V(B) Range:-180 - 180DEG  
V(B) Interval: 0.5DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.352  
Humidity:65.0%  
Test Distance:13.563m [K=1.0000]  
Remarks:

## LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.12V I:0.3264A P:2.807W PF:0.7098 Freq:59.97Hz Lamp Flux:53.8022x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Step Light	WEIGHT:
SPEC.:3W 2700K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.03	0.04	0.04	0.06
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.07	0.09	0.11	0.14	0.16
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.05	0.08	0.11	0.15	0.18	0.22	0.26
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.06	0.08	0.13	0.17	0.21	0.25
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.04	0.06	0.08	0.10	0.12	0.13
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.04	0.03	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.07	0.07	0.09	0.06	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	0.00	0.00	0.00	0.00	0.08	0.09	0.14	0.09	0.04	0.03	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	0.00	0.00	0.00	0.01	0.09	0.18	0.13	0.06	0.05	0.05	0.04	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00
-20	0.00	0.00	0.00	0.05	0.12	0.19	0.09	0.07	0.07	0.07	0.06	0.06	0.08	0.05	0.01	0.00	0.00	0.00	0.00
-10	0.00	0.00	0.00	0.09	0.18	0.20	0.10	0.09	0.09	0.10	0.10	0.16	0.17	0.16	0.12	0.08	0.00	0.00	0.00
0	0.00	0.00	0.00	0.10	0.21	0.22	0.11	0.11	0.11	0.12	0.13	0.26	0.28	0.30	0.29	0.30	0.39	0.50	0.60
10	0.00	0.05	0.32	0.83	1.71	2.49	3.30	3.93	4.37	5.50	7.44	9.71	10.3	8.48	6.24	4.34	3.29	5.43	7.79
20	0.00	0.09	0.57	1.41	2.95	4.55	6.16	7.79	8.39	9.92	12.9	17.0	21.1	22.2	20.0	19.9	22.2	25.4	31.2
30	0.00	0.11	0.72	1.82	3.75	6.15	8.30	10.9	12.8	13.8	16.1	20.0	25.4	31.3	35.6	39.0	42.9	48.4	55.0
40	0.00	0.12	0.71	2.04	3.91	6.82	9.70	12.5	15.9	18.8	20.0	22.0	26.1	31.5	36.1	40.6	45.2	49.8	54.2
50	0.00	0.12	0.65	1.99	3.62	6.12	9.58	13.0	16.1	19.8	23.7	27.2	29.8	33.3	38.2	44.0	50.1	56.1	61.9
60	0.00	0.11	0.48	1.37	3.14	4.88	7.25	10.6	14.4	18.2	21.3	23.3	26.1	29.8	33.9	37.8	41.2	44.3	47.3
70	0.00	0.10	0.31	0.81	1.68	3.09	5.12	6.91	8.88	11.2	13.3	15.0	16.8	18.3	19.8	21.0	22.1	22.9	23.5
80	0.00	0.07	0.21	0.39	0.65	1.04	1.63	2.48	3.34	4.23	5.16	6.04	6.93	7.69	8.36	8.94	9.43	9.80	10.1
90	0.00	0.04	0.08	0.12	0.15	0.19	0.23	0.27	0.31	0.35	0.47	0.60	0.73	0.85	0.98	1.10	1.23	1.36	1.48
100	0.00	0.03	0.06	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 0.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:ADMIN  
Test Date:2022-08-15

V(B) Range:-180 - 180DEG  
V(B) Interval: 0.5DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.352  
Humidity:65.0%  
Test Distance:13.563m [K=1.0000]  
Remarks:

## LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.12V I:0.3264A P:2.807W PF:0.7098 Freq:59.97Hz Lamp Flux:53.8022x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Step Light	WEIGHT:
SPEC.:3W 2700K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-150	0.04	0.04	0.03	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-140	0.14	0.11	0.09	0.07	0.04	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-130	0.22	0.18	0.15	0.11	0.08	0.05	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.21	0.17	0.13	0.08	0.06	0.04	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.12	0.10	0.08	0.06	0.04	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.07	0.07	0.07	0.04	0.00	0.00	0.00	0.00	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.07	0.11	0.14	0.14	0.12	0.07	0.00	0.00	0.00	
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.05	0.09	0.14	0.18	0.21	0.18	0.14	0.04	0.00	0.00	
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.05	0.07	0.14	0.20	0.23	0.25	0.20	0.10	0.00	0.00	
-30	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.06	0.07	0.09	0.11	0.19	0.26	0.28	0.23	0.14	0.00	0.00	
-20	0.00	0.00	0.00	0.01	0.06	0.09	0.10	0.10	0.11	0.12	0.13	0.19	0.28	0.31	0.28	0.16	0.00	0.00	
-10	0.00	0.00	0.09	0.13	0.16	0.18	0.18	0.17	0.16	0.15	0.15	0.17	0.29	0.34	0.32	0.19	0.00	0.00	
0	0.48	0.41	0.35	0.32	0.29	0.29	0.28	0.23	0.19	0.18	0.18	0.19	0.32	0.37	0.34	0.20	0.00	0.00	
10	6.63	5.92	5.70	5.62	5.95	6.92	7.19	7.09	6.49	4.97	4.45	3.26	2.71	1.86	0.99	0.46	0.07	0.00	
20	25.5	21.5	16.9	13.3	14.8	15.1	14.8	14.3	11.5	9.65	8.28	5.99	4.96	3.14	1.47	0.66	0.14	0.00	
30	46.5	38.9	33.0	28.6	25.6	24.5	23.0	18.7	15.7	14.2	10.6	8.55	6.39	3.94	1.78	0.80	0.18	0.00	
40	49.3	44.6	40.8	38.0	34.9	29.6	24.7	22.9	20.0	15.4	12.6	10.3	6.93	3.75	1.96	0.85	0.20	0.00	
50	56.5	51.0	45.3	40.1	35.7	31.9	27.7	22.9	19.3	17.2	13.5	9.67	5.92	3.29	1.85	0.83	0.19	0.00	
60	44.2	40.9	37.4	33.4	29.4	26.5	24.7	22.5	18.2	14.4	10.5	6.54	4.35	2.79	1.55	0.75	0.16	0.00	
70	22.9	22.0	21.0	19.7	18.4	16.8	14.7	12.2	9.75	7.67	6.01	4.42	3.04	2.02	1.24	0.51	0.13	0.00	
80	9.66	9.15	8.56	7.92	7.23	6.58	5.94	5.37	4.80	4.08	3.34	2.56	1.73	1.06	0.57	0.26	0.10	0.00	
90	1.41	1.33	1.26	1.18	1.11	1.04	0.96	0.89	0.81	0.72	0.63	0.54	0.45	0.36	0.27	0.18	0.09	0.00	
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.10	0.07	0.00	
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.00	
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.00	
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H( $\beta$ ) Range:-90 - 90DEGH( $\beta$ ) Interval: 0.5DEG

Test Speed: HIGH

Temperature:25.3DEG

Operators:ADMIN

Test Date:2022-08-15

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.352

Humidity:65.0%

Test Distance:13.563m [K=1.0000]

Remarks: