

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	1032.5 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	77.9V x 113.3H
	At 50% of Imax	38.3V x 66.1H
	At 90% of Imax	15.2V x 25.4H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	868.4 lumens per klm.
	To 50% of Imax	512.8 lumens per klm.
	To 90% of Imax	103.0 lumens per klm.

Upward LOR	1.2 %
Downward LOR	98.8 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:30 July 2022

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.08V I:1.478A P:12.46W PF:0.6976 Freq:49.99Hz Lamp Flux:732.951x1 lm		
NAME: LED	TYPE:F7A1-12W-BZ	WEIGHT:
SPEC.:3000K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

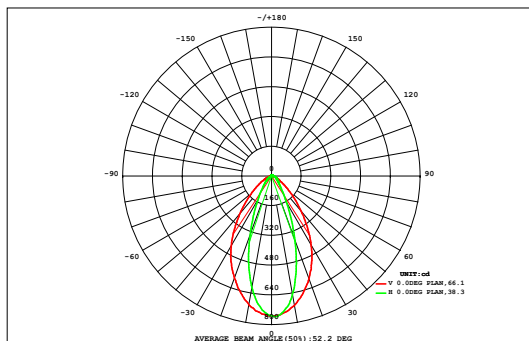

DATA OF LAMP		Eff:58.84lm/W	
MODEL	F7A1-12W-BZ	Imax (cd)	756.8
NOMINAL POWER (W)	12	AVAILABILITY (%)	87.2
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	639.0
NOMINAL FLUX (lm)	732.951	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	733.0
TEST VOLTAGE (V)	12	θ @50% (H,V)	66,38DEG

		AREA FLUX DIAGRAM															UNIT: lm				Φ t	Φ a									
		0.00	0.00	0.01	0.02	0.03	0.06	0.08	0.11	0.13	0.13	0.11	0.08	0.06	0.03	0.02	0.01	0.00	0.00	0.86	0.00										
VERTICAL (DEG)	90	0.00	0.00	0.02	0.08	0.17	0.27	0.36	0.42	0.45	0.45	0.41	0.34	0.25	0.15	0.07	0.02	0.00	0.00	3.46	0.00										
	80	0.00	0.01	0.08	0.23	0.41	0.58	0.71	0.79	0.79	0.78	0.76	0.68	0.54	0.37	0.20	0.06	0.01	0.00	7.00	0.00										
	70	0.00	0.03	0.17	0.40	0.68	0.98	1.22	1.31	1.21	1.19	1.25	1.14	0.91	0.62	0.36	0.14	0.02	0.00	11.6	0.00										
	60	0.00	0.05	0.26	0.59	1.07	1.65	2.14	2.31	2.01	1.98	2.21	2.00	1.51	0.97	0.53	0.22	0.04	0.00	19.5	6.69										
	50	0.00	0.08	0.34	0.83	1.65	2.77	3.85	4.36	3.91	3.88	4.25	3.68	2.57	1.49	0.74	0.30	0.06	0.00	34.7	30.6										
	40	0.00	0.10	0.42	1.10	2.42	4.41	6.58	8.14	8.32	8.31	8.06	6.40	4.17	2.20	0.98	0.37	0.08	0.00	62.0	59.2										
	30	0.00	0.12	0.49	1.38	3.28	6.36	10.0	13.4	15.6	15.7	13.4	9.88	6.10	3.01	1.22	0.43	0.09	0.00	100	98.2										
	-30	0.00	0.12	0.54	1.60	4.00	8.10	13.1	17.8	21.3	21.4	17.9	13.0	7.82	3.70	1.41	0.47	0.10	0.00	132	130										
		0.00	0.12	0.53	1.59	3.99	8.09	13.0	17.6	20.8	20.9	17.7	12.9	7.80	3.69	1.41	0.46	0.10	0.00	131	129										
		0.00	0.11	0.47	1.36	3.25	6.31	9.88	13.0	14.8	14.8	13.1	9.75	6.05	2.99	1.20	0.41	0.09	0.00	97.6	95.3										
		0.00	0.09	0.39	1.07	2.37	4.34	6.45	7.86	7.81	7.80	7.78	6.27	4.10	2.15	0.94	0.34	0.07	0.00	59.8	57.0										
		0.00	0.07	0.30	0.77	1.58	2.68	3.73	4.18	3.65	3.62	4.07	3.55	2.48	1.42	0.68	0.26	0.05	0.00	33.1	28.8										
		0.00	0.04	0.21	0.50	0.96	1.53	2.00	2.13	1.79	1.76	2.03	1.86	1.39	0.86	0.44	0.18	0.03	0.00	17.7	4.50										
		0.00	0.02	0.13	0.29	0.52	0.78	1.00	1.06	0.93	0.91	1.00	0.92	0.71	0.46	0.25	0.10	0.01	0.00	9.09	0.00										
		0.00	0.00	0.05	0.14	0.23	0.31	0.37	0.37	0.31	0.30	0.35	0.33	0.27	0.20	0.11	0.03	0.00	0.00	3.38	0.00										
	-70	0.00	0.00	0.00	0.02	0.06	0.09	0.09	0.07	0.03	0.03	0.06	0.07	0.07	0.04	0.01	0.00	0.00	0.00	0.65	0.00										
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00											
-90	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL (DEG)															20	30	40	50	60	70	80	90
Φ t	0.01	0.96	4.39	12.0	26.7	49.3	74.5	94.8	104	104	94.4	72.9	46.8	24.3	10.6	3.80	0.77	0.01	724	---											
Φ a	0.00	0.00	0.00	4.68	20.9	43.7	68.8	88.8	97.1	97.1	88.3	67.1	41.1	18.4	3.06	0.00	0.00	0.00	---	639											


one-half-peak spread: U:20.7,D:17.8 , L:31.6,R:31.6 NEMA Beam Type: Type 6 x 5 (H x V)

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:30 July 2022

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.08V I:1.478A P:12.46W PF:0.6976 Freq:49.99Hz Lamp Flux:732.95lx1 lm		
NAME: LED	TYPE:F7A1-12W-BZ	WEIGHT:
SPEC.:3000K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

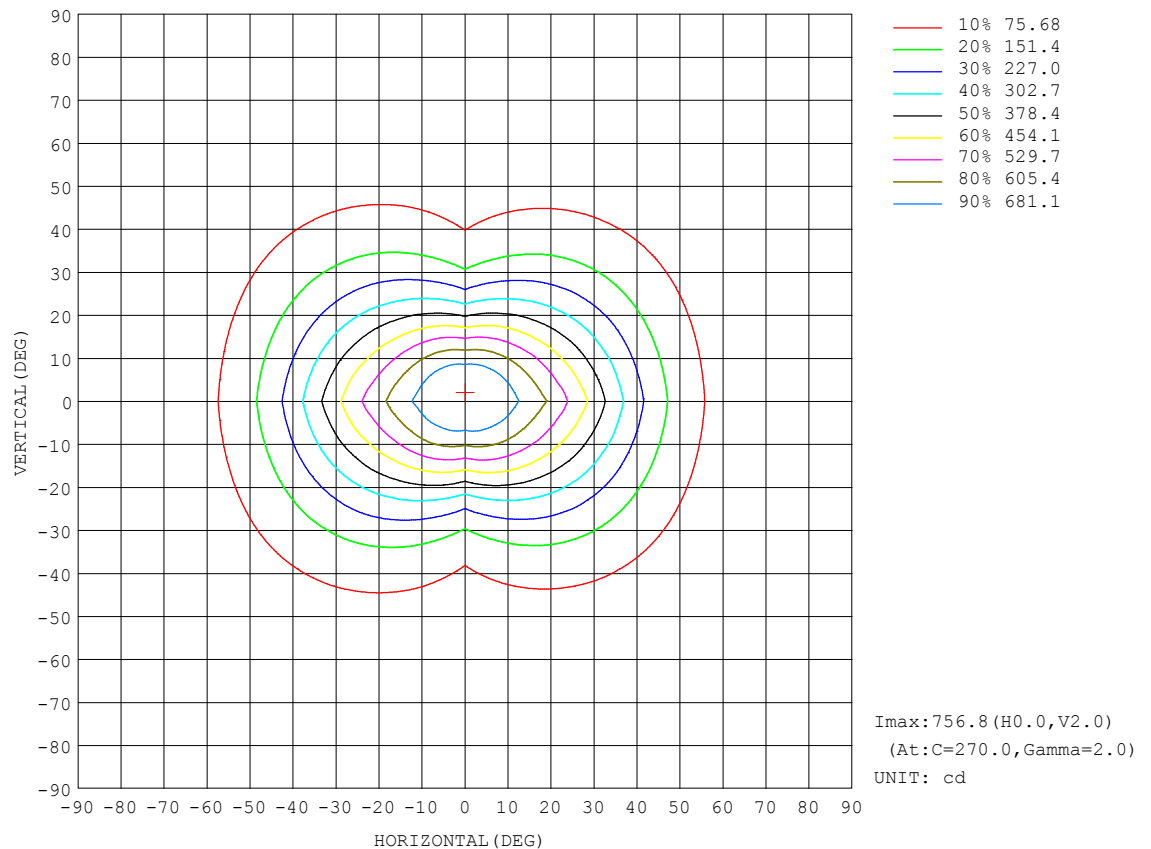


H(β) Range:-90 - 90DEG
 H(β) Interval: 0.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:ADMIN
 Test Date:30 July 2022

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
 Humidity:65.0%
 Test Distance:13.563m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM


Test:U:12.08V I:1.478A P:12.46W PF:0.6976 Freq:49.99Hz Lamp Flux:732.95lx1 lm		
NAME: LED	TYPE:F7A1-12W-BZ	WEIGHT:
SPEC.:3000K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

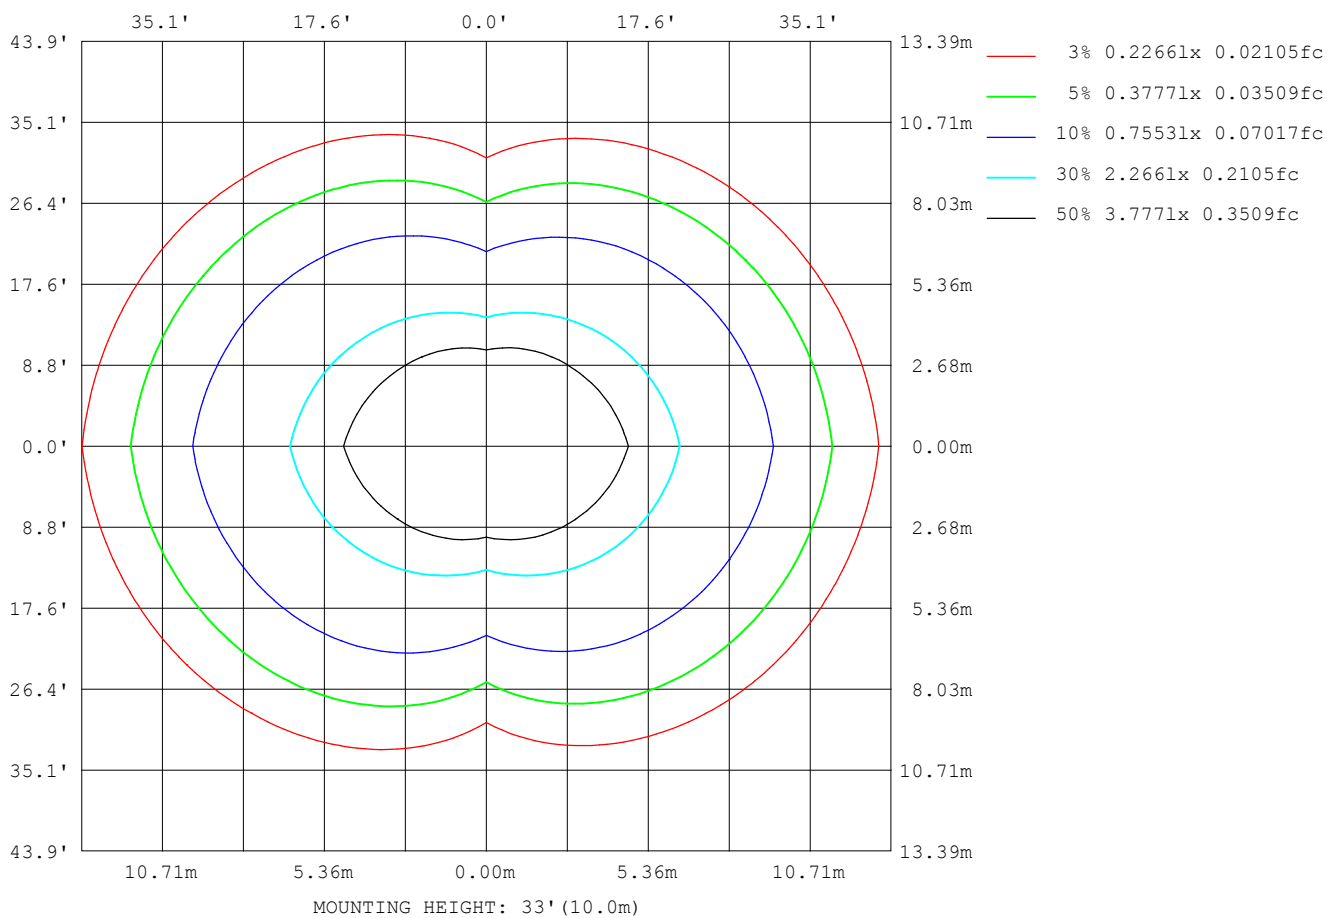

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:30 July 2022

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

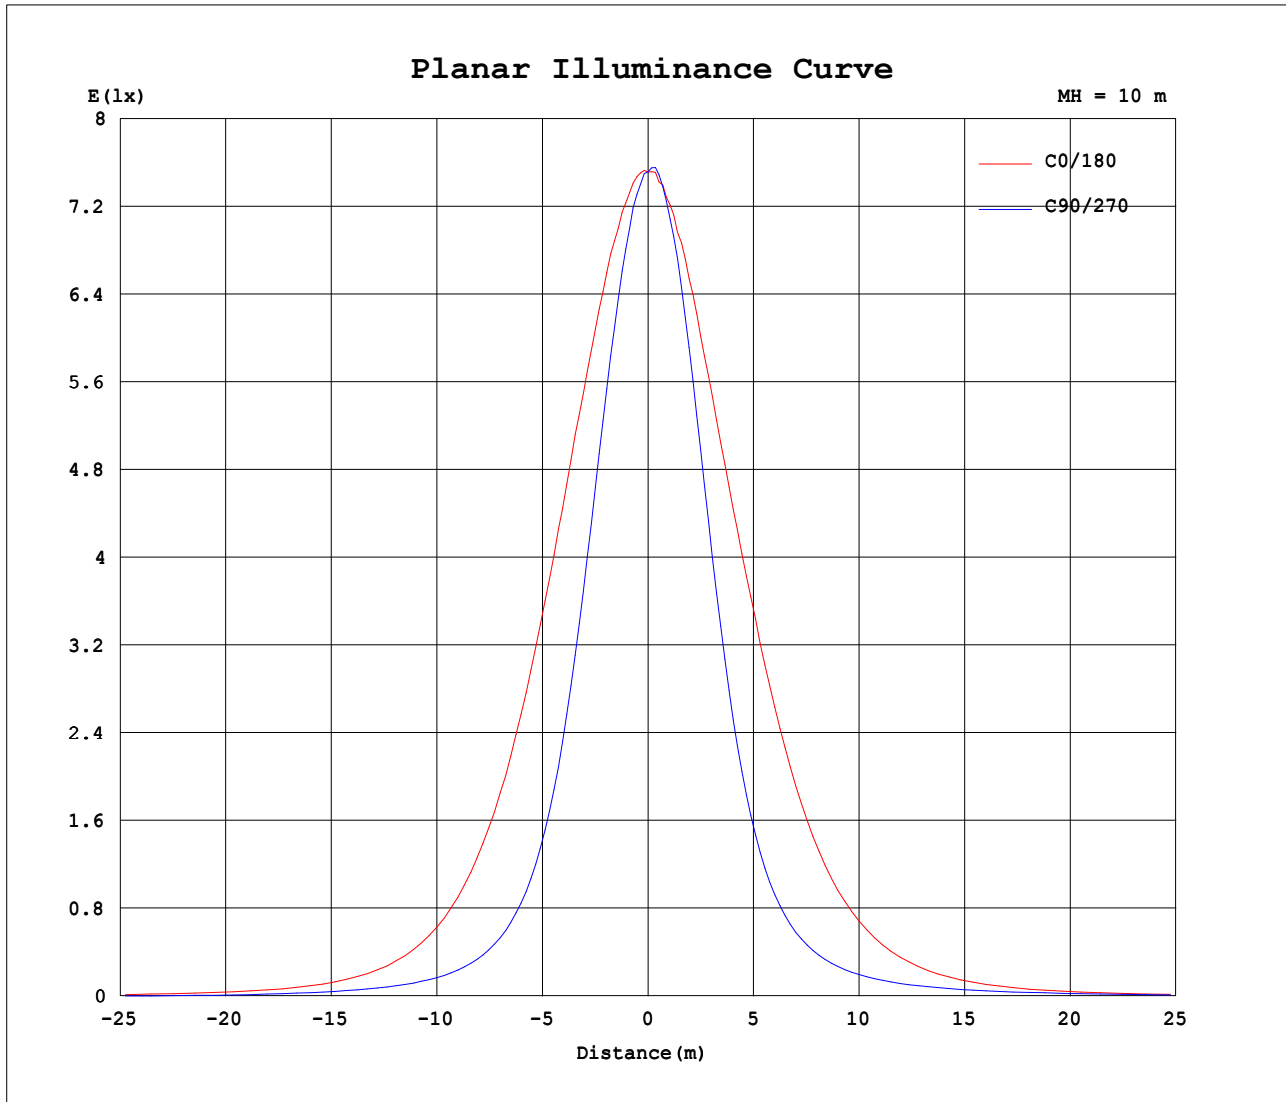


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:30 July 2022

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.08V I:1.478A P:12.46W PF:0.6976 Freq:49.99Hz Lamp Flux:732.951x1 lm		
NAME: LED	TYPE:F7A1-12W-BZ	WEIGHT:
SPEC.:3000K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

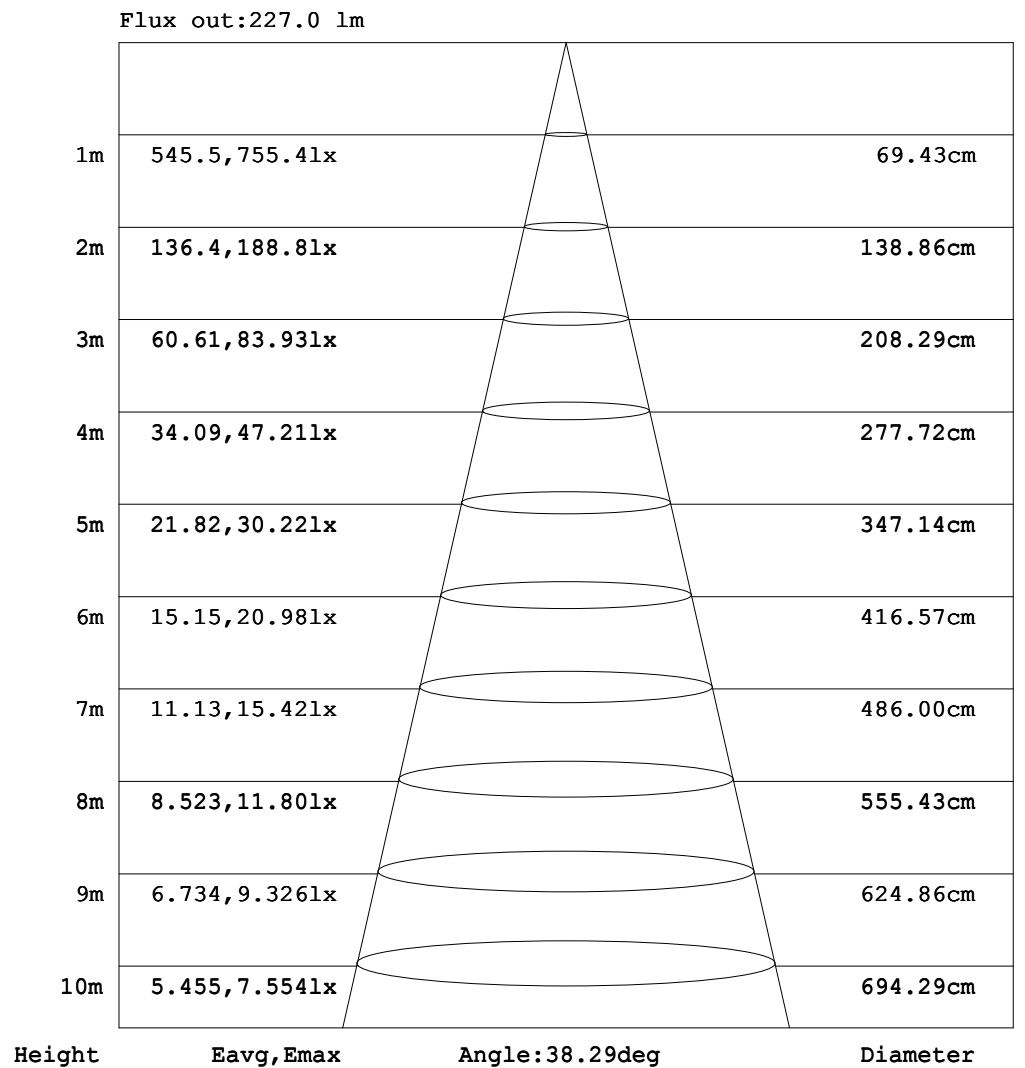

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
 H(β) Interval: 0.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:ADMIN
 Test Date:30 July 2022

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
 Humidity:65.0%
 Test Distance:13.563m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.08V I:1.478A P:12.46W PF:0.6976 Freq:49.99Hz Lamp Flux:732.951x1 lm		
NAME: LED	TYPE:F7A1-12W-BZ	WEIGHT:
SPEC.:3000K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.03	0.19	0.39	0.68	1.05	1.50	2.03	2.56	3.15	3.73	4.34	4.95	5.53	6.06	6.50	6.74
-170	0.00	0.00	0.00	0.02	0.17	0.37	0.64	0.98	1.41	1.88	2.41	3.00	3.60	4.25	4.87	5.46	5.95	6.33	6.55
-160	0.00	0.00	0.00	0.01	0.13	0.30	0.55	0.83	1.17	1.57	2.04	2.55	3.09	3.64	4.19	4.72	5.16	5.49	5.68
-150	0.00	0.00	0.00	0.00	0.09	0.23	0.40	0.62	0.88	1.18	1.51	1.90	2.28	2.70	3.09	3.46	3.77	3.98	4.08
-140	0.00	0.00	0.00	0.00	0.04	0.14	0.26	0.41	0.59	0.78	0.99	1.22	1.44	1.67	1.90	2.09	2.24	2.33	2.35
-130	0.00	0.00	0.00	0.00	0.01	0.06	0.14	0.23	0.34	0.44	0.56	0.67	0.78	0.89	0.98	1.05	1.10	1.12	1.11
-120	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.09	0.14	0.20	0.25	0.31	0.35	0.40	0.44	0.46	0.48	0.49	0.48
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.02	0.03	0.06	0.09	0.12	0.14	0.15	0.16	0.17	0.17	0.17
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.02	0.02
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.07	0.16	0.28	0.39	0.51	0.56	0.57	0.50	0.37	0.20	0.00
-70	0.00	0.00	0.00	0.00	0.17	0.85	2.26	4.05	5.57	6.52	7.06	7.27	7.17	6.68	5.97	5.05	3.93	2.64	1.22
-60	0.00	0.00	0.00	0.44	2.66	6.43	9.59	12.1	14.1	15.9	18.0	20.1	21.9	23.1	23.7	23.3	22.2	20.3	17.8
-50	0.00	0.00	0.12	2.48	8.00	12.8	17.1	21.6	27.1	33.0	39.1	44.5	48.8	51.6	52.4	51.2	47.8	42.4	35.6
-40	0.00	0.00	0.58	5.99	12.9	19.1	26.2	35.1	45.6	57.2	69.4	81.4	91.5	98.9	102	101	93.8	82.1	66.4
-30	0.00	0.00	1.43	9.40	17.5	25.8	36.9	51.1	68.6	89.6	113	138	160	179	192	196	190	174	147
-20	0.00	0.00	2.45	12.0	21.2	32.4	47.4	67.8	94.6	129	169	212	256	295	327	352	367	366	341
-10	0.00	0.00	3.24	13.8	24.2	37.6	56.2	82.6	120	167	225	291	358	422	478	532	582	614	611
0	0.00	0.00	3.55	14.8	26.0	40.5	61.4	91.7	135	193	265	349	436	514	584	648	704	737	752
10	0.00	0.04	3.42	14.3	25.0	38.5	57.0	83.4	120	168	226	292	360	425	484	544	601	642	648
20	0.00	0.08	2.79	12.8	22.7	34.2	49.2	69.4	96.2	130	171	214	259	300	335	363	384	389	370
30	0.00	0.10	1.89	10.5	19.4	28.6	39.8	53.8	71.1	92.1	116	141	164	184	197	203	199	185	160
40	0.00	0.12	1.10	7.22	15.2	22.5	30.5	39.5	49.7	61.1	73.1	85.3	95.7	104	107	106	100	89.4	74.4
50	0.00	0.11	0.63	3.67	10.2	16.3	21.9	27.6	33.5	39.3	45.2	50.4	54.7	57.7	58.7	57.9	54.8	50.0	43.8
60	0.00	0.09	0.43	1.45	4.51	9.39	13.9	17.9	21.4	24.6	27.7	30.2	32.3	33.6	34.3	34.2	33.5	32.2	30.3
70	0.00	0.06	0.29	0.71	1.47	2.92	5.27	8.18	10.9	13.3	15.3	16.9	18.2	19.2	19.9	20.4	20.6	20.5	20.3
80	0.00	0.02	0.12	0.32	0.61	0.99	1.45	2.00	2.67	3.41	4.24	5.09	5.97	6.78	7.57	8.25	8.82	9.30	9.69
90	0.00	0.00	0.01	0.01	0.02	0.02	0.02	0.03	0.03	0.04	0.04	0.04	0.05	0.05	0.06	0.06	0.06	0.07	0.07
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.02	0.03	0.03	0.03	0.03	0.02	0.01	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.08	0.12	0.13	0.15	0.16	0.16	0.14	0.12	0.08	0.04	0.00
130	0.00	0.00	0.00	0.00	0.00	0.03	0.10	0.17	0.23	0.29	0.34	0.43	0.49	0.51	0.54	0.53	0.52	0.50	0.45
140	0.00	0.00	0.00	0.00	0.03	0.11	0.21	0.32	0.45	0.61	0.74	0.90	1.04	1.17	1.27	1.33	1.35	1.33	1.24
150	0.00	0.00	0.00	0.00	0.08	0.20	0.35	0.52	0.76	0.99	1.26	1.54	1.80	2.08	2.34	2.57	2.72	2.78	2.71
160	0.00	0.00	0.00	0.00	0.12	0.28	0.50	0.76	1.07	1.42	1.81	2.22	2.66	3.11	3.53	3.93	4.24	4.41	4.43
170	0.00	0.00	0.00	0.02	0.17	0.35	0.61	0.94	1.35	1.79	2.27	2.80	3.36	3.93	4.50	5.03	5.48	5.79	5.85
180	0.00	0.00	0.00	0.03	0.19	0.39	0.68	1.05	1.50	2.03	2.56	3.15	3.73	4.34	4.95	5.53	6.06	6.50	6.73

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:30 July 2022

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.08V I:1.478A P:12.46W PF:0.6976 Freq:49.99Hz Lamp Flux:732.951x1 lm		
NAME: LED	TYPE:F7A1-12W-BZ	WEIGHT:
SPEC.:3000K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	6.71	6.44	6.10	5.67	5.17	4.62	4.10	3.49	2.89	2.30	1.79	1.34	0.88	0.59	0.28	0.14	0.00	0.00	
-170	6.46	6.23	5.87	5.45	4.93	4.36	3.78	3.19	2.64	2.13	1.64	1.22	0.82	0.56	0.27	0.14	0.00	0.00	
-160	5.61	5.40	5.07	4.65	4.20	3.71	3.20	2.71	2.26	1.79	1.39	1.03	0.72	0.49	0.26	0.13	0.00	0.00	
-150	4.08	3.97	3.74	3.47	3.13	2.77	2.42	2.08	1.73	1.40	1.13	0.82	0.59	0.40	0.19	0.09	0.00	0.00	
-140	2.41	2.39	2.31	2.19	2.01	1.84	1.64	1.42	1.20	1.01	0.79	0.62	0.46	0.26	0.13	0.02	0.00	0.00	
-130	1.18	1.21	1.22	1.19	1.15	1.06	0.98	0.88	0.77	0.63	0.53	0.42	0.27	0.17	0.12	0.00	0.00	0.00	
-120	0.53	0.56	0.57	0.58	0.58	0.54	0.51	0.48	0.41	0.37	0.30	0.22	0.13	0.12	0.01	0.00	0.00	0.00	
-110	0.20	0.22	0.23	0.24	0.24	0.24	0.21	0.18	0.18	0.13	0.10	0.10	0.05	0.00	0.00	0.00	0.00	0.00	
-100	0.03	0.03	0.03	0.04	0.04	0.03	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.11	0.21	0.29	0.32	0.30	0.27	0.21	0.16	0.11	0.07	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	2.43	3.53	4.45	5.20	5.76	6.09	6.11	5.77	5.14	4.08	2.67	1.30	0.46	0.13	0.00	0.00	0.00	0.00	
-60	19.8	21.3	22.0	22.0	21.2	19.8	17.9	15.8	13.9	12.1	10.2	7.68	4.56	1.53	0.26	0.00	0.00	0.00	
-50	41.4	45.7	48.3	48.9	47.7	44.6	40.3	35.2	29.5	23.8	18.8	14.7	10.7	5.87	1.41	0.11	0.00	0.00	
-40	80.9	91.4	96.9	97.2	92.6	84.6	73.9	62.7	51.1	40.6	30.8	22.8	16.4	10.6	4.00	0.33	0.00	0.00	
-30	173	188	192	187	173	153	128	103	80.5	60.9	45.1	32.2	22.4	14.7	6.99	0.76	0.00	0.00	
-20	367	367	351	325	289	247	202	157	117	84.5	59.7	41.5	28.1	18.2	9.47	1.37	0.00	0.00	
-10	616	585	536	478	417	350	279	213	153	107	72.8	49.3	32.7	20.9	11.2	1.87	0.00	0.00	
0	741	708	654	589	512	426	337	251	178	121	80.8	53.5	35.3	22.5	12.0	2.06	0.00	0.00	
10	643	604	548	485	420	352	280	214	154	107	73.6	50.1	33.6	21.7	11.6	2.05	0.04	0.00	
20	390	384	362	332	294	250	204	159	119	86.1	61.3	43.2	29.9	19.7	10.3	1.71	0.08	0.00	
30	184	197	199	192	177	156	131	106	83.0	63.4	47.8	35.2	25.2	16.7	8.09	1.23	0.10	0.00	
40	88.2	97.9	103	102	97.3	88.9	77.8	66.5	55.0	44.6	35.2	27.1	19.8	12.8	5.23	0.85	0.12	0.00	
50	49.0	52.8	55.0	55.2	53.7	50.5	46.3	41.3	35.8	30.3	24.8	19.5	14.1	8.06	2.60	0.61	0.11	0.00	
60	31.7	32.6	32.9	32.6	31.7	30.1	28.1	25.5	22.6	19.4	15.9	12.0	7.52	3.38	1.28	0.43	0.09	0.00	
70	20.3	20.1	19.8	19.1	18.3	17.1	15.7	14.0	11.9	9.46	6.80	4.31	2.53	1.43	0.71	0.29	0.06	0.00	
80	9.22	8.67	8.03	7.32	6.52	5.73	4.91	4.12	3.36	2.66	2.02	1.45	0.99	0.61	0.32	0.12	0.02	0.00	
90	0.07	0.06	0.06	0.06	0.05	0.05	0.04	0.04	0.04	0.03	0.03	0.02	0.02	0.02	0.01	0.01	0.00	0.00	
100	0.01	0.02	0.02	0.03	0.04	0.03	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
110	0.03	0.07	0.10	0.12	0.14	0.15	0.15	0.13	0.14	0.11	0.09	0.10	0.05	0.00	0.00	0.00	0.00	0.00	
120	0.08	0.16	0.23	0.28	0.33	0.35	0.35	0.36	0.33	0.31	0.26	0.20	0.12	0.11	0.01	0.00	0.00	0.00	
130	0.56	0.64	0.70	0.76	0.76	0.77	0.74	0.67	0.62	0.53	0.46	0.38	0.25	0.16	0.12	0.00	0.00	0.00	
140	1.41	1.50	1.56	1.55	1.51	1.44	1.32	1.17	1.03	0.87	0.70	0.57	0.43	0.25	0.13	0.02	0.00	0.00	
150	2.88	2.93	2.86	2.72	2.51	2.29	2.06	1.83	1.54	1.28	1.03	0.76	0.56	0.39	0.19	0.09	0.00	0.00	
160	4.54	4.49	4.28	3.99	3.66	3.28	2.88	2.47	2.11	1.68	1.32	0.98	0.69	0.47	0.26	0.13	0.00	0.00	
170	5.92	5.76	5.45	5.08	4.61	4.11	3.59	3.05	2.55	2.07	1.60	1.19	0.80	0.55	0.27	0.14	0.00	0.00	
180	6.71	6.44	6.10	5.67	5.17	4.62	4.10	3.49	2.89	2.30	1.79	1.34	0.88	0.59	0.28	0.14	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:30 July 2022

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: