

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		3481.1 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	42.2V x 42.1H
	At 50% of Imax	33.5V x 33.4H
	At 90% of Imax	19.0V x 18.7H
Beam Flux	Total	1000.5 lumens per klm.
	To 10% of Imax	892.0 lumens per klm.
	To 50% of Imax	749.3 lumens per klm.
	To 90% of Imax	290.3 lumens per klm.
	Upward LOR	1.4 %
	Downward LOR	98.7 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:11.94V I:0.7078A P:5.352W PF:0.6335 Freq:59.98Hz Lamp Flux:200.394x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Micro	WEIGHT:
SPEC.:5.5W 3000K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-029

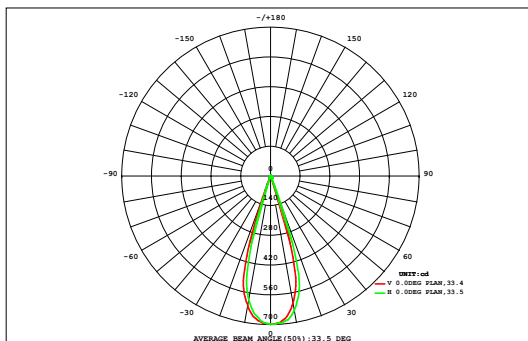

DATA OF LAMP		Eff:37.44lm/W	
MODEL M4B1	-5.5W-30K-40-A	Imax(cd)	697.6
NOMINAL POWER(W)	5.5	AVAILABILITY(%)	88.9
RATED VOLTAGE(V)	12	Avai. FLUX(lm)	178.2
NOMINAL FLUX(lm)	200.394	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	200.4
TEST VOLTAGE(V)	12	θ @50%(H,V)	33,34DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.02	0.03	0.03	0.03	0.03	0.03	0.04	0.04	0.04	0.04	0.04	0.03	0.03	0.03	0.03	0.02	0.02	0.02	0.57	0.00
27	0.02	0.03	0.03	0.03	0.03	0.03	0.04	0.04	0.04	0.04	0.04	0.03	0.03	0.03	0.03	0.02	0.02	0.02	1.24	0.30
24	0.03	0.03	0.03	0.04	0.04	0.06	0.10	0.15	0.18	0.18	0.14	0.09	0.05	0.03	0.03	0.03	0.02	0.02	3.68	3.09
21	0.03	0.03	0.04	0.04	0.09	0.20	0.35	0.50	0.60	0.60	0.48	0.33	0.18	0.08	0.04	0.03	0.03	0.02	8.15	7.71
18	0.03	0.04	0.04	0.11	0.28	0.56	0.86	1.08	1.19	1.18	1.05	0.81	0.51	0.24	0.09	0.03	0.03	0.03	12.5	12.1
15	0.03	0.04	0.08	0.26	0.62	1.03	1.33	1.48	1.55	1.54	1.45	1.27	0.96	0.54	0.21	0.06	0.03	0.03	15.8	15.5
12	0.04	0.05	0.17	0.50	1.00	1.37	1.56	1.66	1.72	1.72	1.65	1.53	1.30	0.89	0.41	0.13	0.04	0.03	18.1	17.8
9	0.04	0.07	0.28	0.76	1.26	1.53	1.68	1.79	1.84	1.84	1.78	1.66	1.49	1.15	0.63	0.21	0.05	0.03	19.5	19.2
	0.04	0.10	0.38	0.94	1.39	1.61	1.76	1.85	1.89	1.89	1.85	1.74	1.58	1.30	0.79	0.28	0.06	0.03	20.0	19.8
	0.04	0.12	0.44	1.02	1.44	1.64	1.79	1.87	1.90	1.90	1.87	1.78	1.61	1.35	0.86	0.31	0.07	0.03	19.8	19.6
	0.04	0.11	0.42	1.00	1.43	1.63	1.78	1.86	1.90	1.90	1.86	1.76	1.60	1.33	0.83	0.29	0.07	0.03	18.8	18.5
	0.04	0.09	0.33	0.86	1.33	1.57	1.72	1.81	1.85	1.85	1.81	1.70	1.53	1.24	0.71	0.23	0.05	0.03	16.8	16.5
	0.04	0.06	0.22	0.63	1.14	1.45	1.61	1.71	1.75	1.75	1.70	1.59	1.40	1.03	0.51	0.15	0.04	0.03	13.9	13.5
-12	0.04	0.04	0.12	0.37	0.80	1.20	1.43	1.54	1.58	1.58	1.53	1.40	1.13	0.70	0.28	0.08	0.03	0.03	9.79	9.37
-15	0.03	0.04	0.06	0.17	0.41	0.76	1.06	1.23	1.30	1.29	1.21	1.01	0.68	0.33	0.12	0.04	0.03	0.03	4.91	4.40
-18	0.03	0.03	0.04	0.06	0.15	0.31	0.51	0.68	0.75	0.74	0.65	0.46	0.26	0.12	0.04	0.03	0.03	0.02	1.63	0.76
-21	0.03	0.03	0.03	0.04	0.05	0.09	0.15	0.21	0.24	0.23	0.19	0.13	0.07	0.04	0.03	0.03	0.03	0.02	0.62	0.00
-24	0.02	0.03	0.03	0.03	0.04	0.04	0.04	0.05	0.05	0.05	0.04	0.04	0.03	0.03	0.03	0.03	0.02	0.02	0.51	0.00
-27	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.02	0.02	0.02	---	178
	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL (DEG)	6	9	12	15	18	21	24	27			
Φ t	0.59	0.96	2.77	6.89	11.5	15.1	17.8	19.5	20.4	20.3	19.3	17.4	14.4	10.5	5.66	2.01	0.66	0.44	186	---
Φ a	0.00	0.06	2.09	6.41	11.2	14.8	17.5	19.3	20.1	20.0	19.0	17.1	14.1	10.1	5.16	1.26	0.00	0.00	---	178

one-half-peak spread: U:16.1,D:14.0 , L:18.2,R:15.3


NEMA Beam Type: Type 3

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:11.94V I:0.7078A P:5.352W PF:0.6335 Freq:59.98Hz Lamp Flux:200.394x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Micro	WEIGHT:
SPEC.:5.5W 3000K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-029

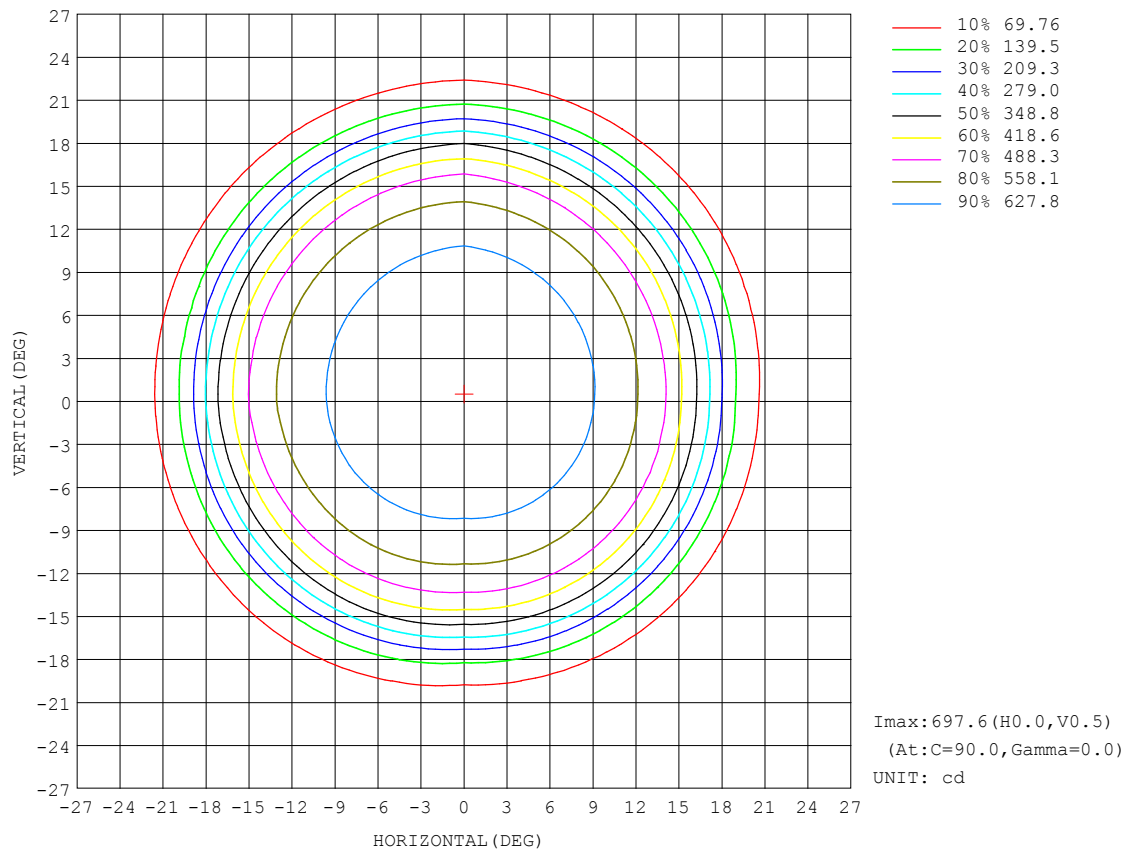


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:11.94V I:0.7078A P:5.352W PF:0.6335 Freq:59.98Hz Lamp Flux:200.394x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Micro	WEIGHT:
SPEC.:5.5W 3000K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-029

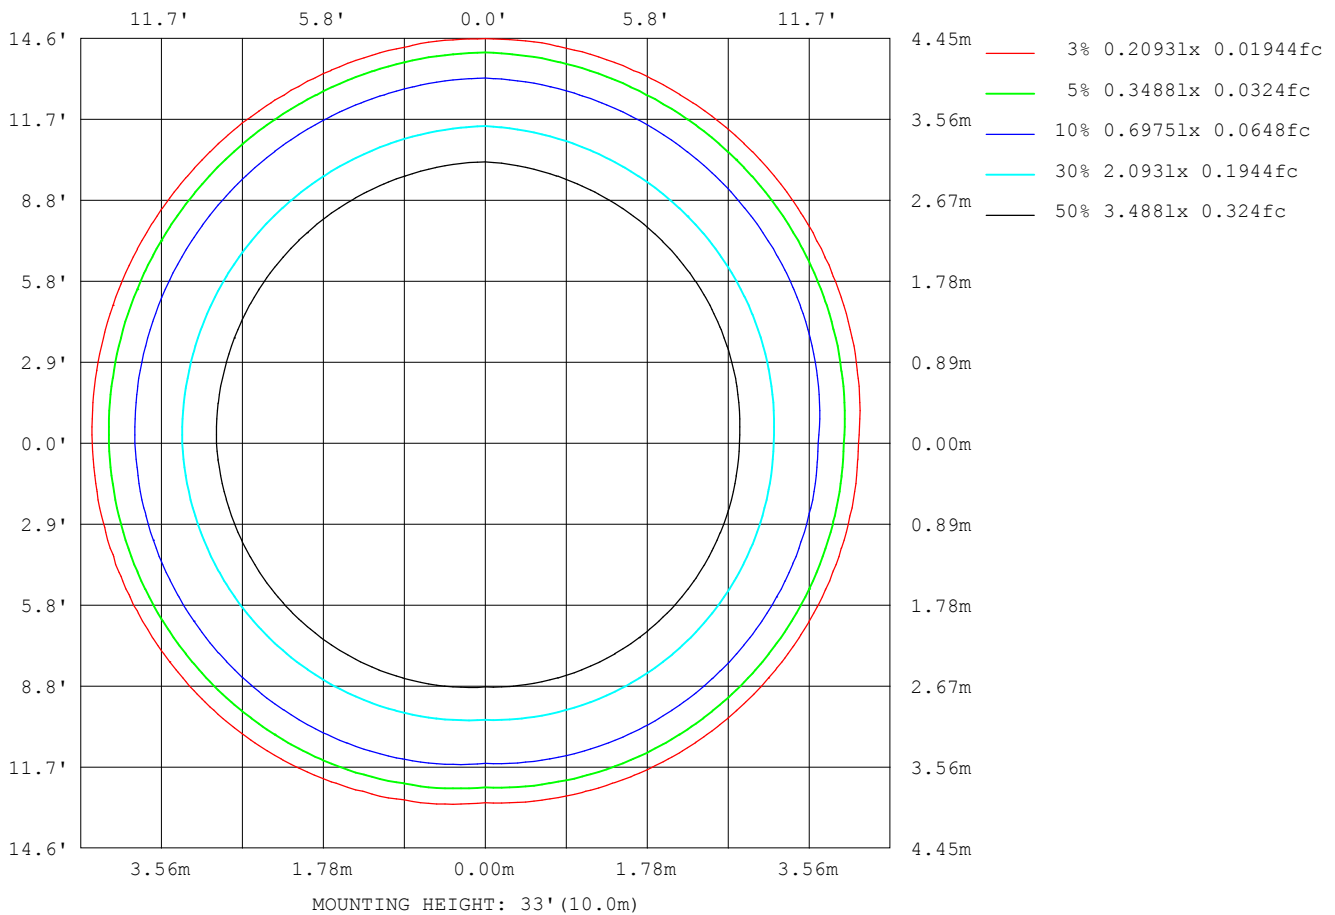

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

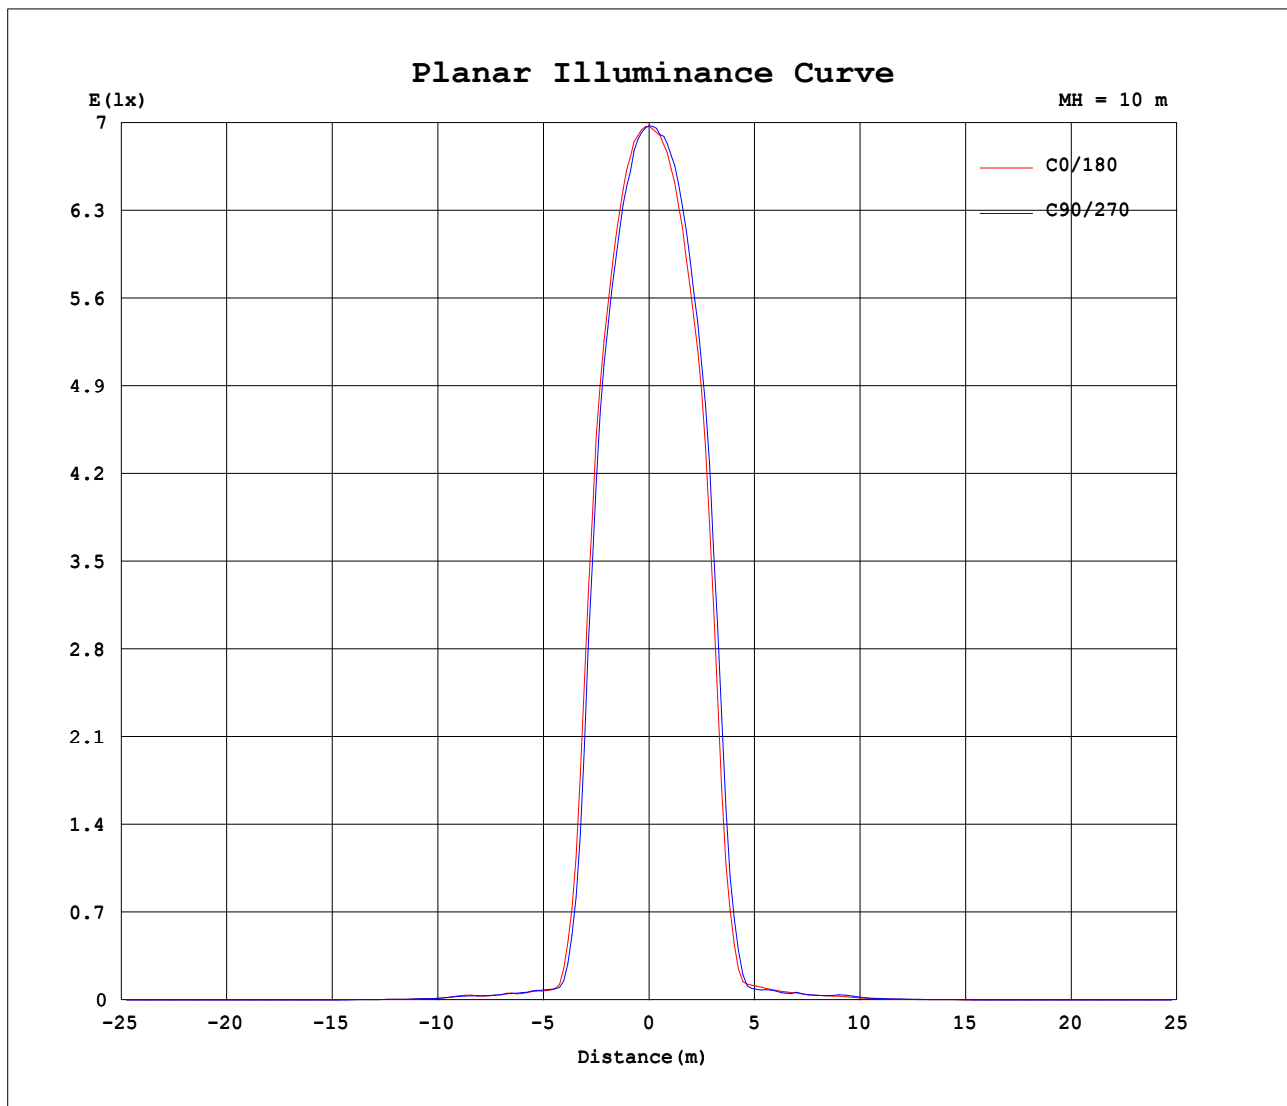


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:11.94V I:0.7078A P:5.352W PF:0.6335 Freq:59.98Hz Lamp Flux:200.394x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Micro	WEIGHT:
SPEC.:5.5W 3000K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-029

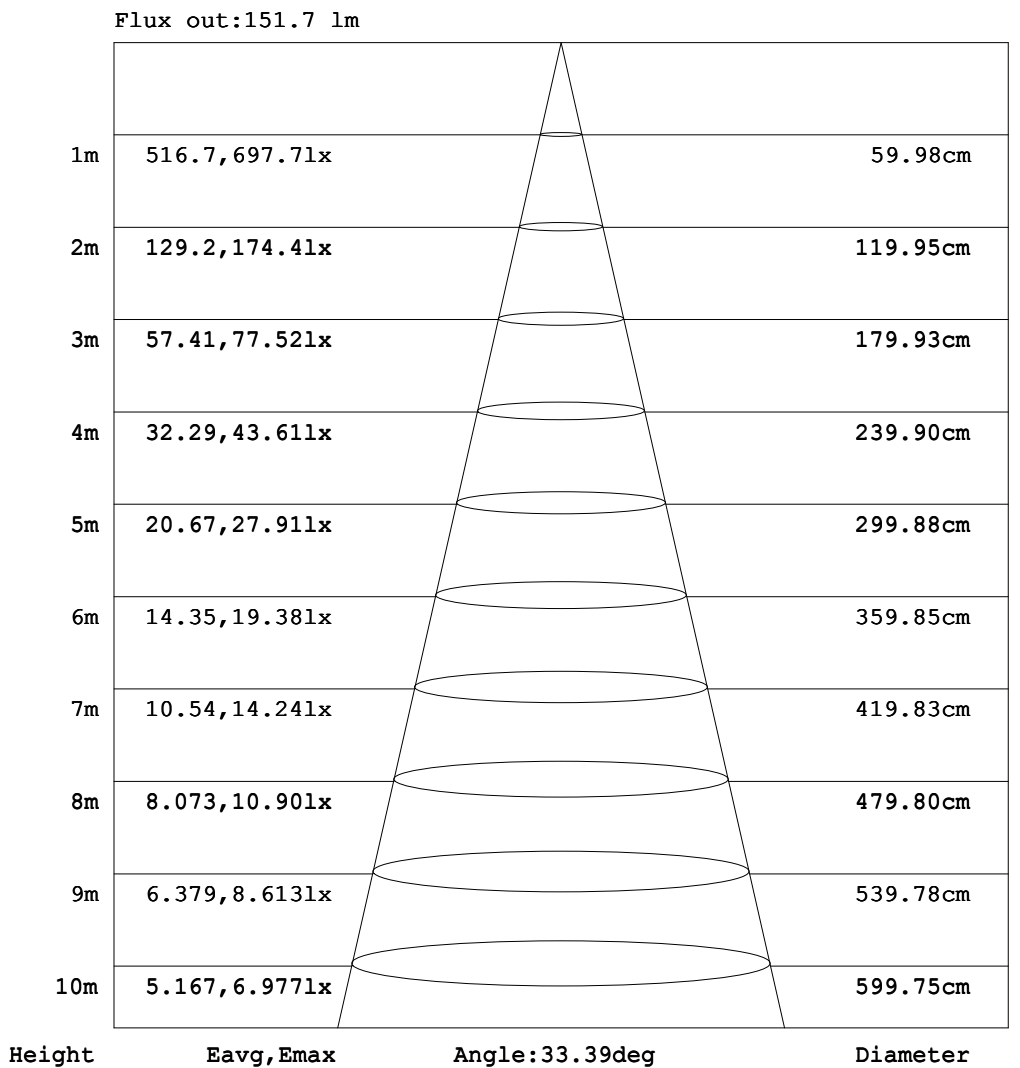

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:11.94V I:0.7078A P:5.352W PF:0.6335 Freq:59.98Hz Lamp Flux:200.394x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Micro	WEIGHT:
SPEC.:5.5W 3000K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-029

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.19	0.52	1.05	1.60	2.13	2.57	2.72	2.84	2.91
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.21	0.56	1.06	1.61	2.16	2.61	2.83	2.89
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.05	0.14	0.41	0.78	1.25	1.73	2.18	2.55	2.83
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.07	0.19	0.41	0.70	1.01	1.35	1.62	1.86	2.02
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.05	0.12	0.22	0.36	0.53	0.69	0.81	0.89
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.07	0.10	0.12	0.13
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.06	0.12	0.15	0.15	0.15	0.15
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.13	0.16	0.20	0.29	0.33	0.43	0.51	0.60	0.68	0.73	0.75
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.13	0.18	0.30	0.44	0.69	0.91	1.16	1.48	1.82	2.08	2.26	2.37	2.41
-40	0.00	0.00	0.00	0.00	0.00	0.14	0.22	0.37	0.70	1.03	1.56	2.14	2.88	3.92	5.33	6.78	7.57	7.78	7.84
-30	0.00	0.00	0.00	0.00	0.05	0.18	0.35	0.73	1.15	1.93	2.89	4.85	7.39	7.64	8.53	9.73	9.93	10.0	9.77
-20	0.00	0.00	0.00	0.00	0.14	0.26	0.56	1.01	1.82	2.93	5.66	7.87	9.10	10.9	13.2	14.0	27.1	56.0	62.3
-10	0.00	0.00	0.00	0.00	0.15	0.31	0.71	1.25	2.18	4.24	7.43	8.79	11.6	14.8	40.4	237	487	573	592
0	0.00	0.00	0.00	0.00	0.15	0.32	0.76	1.39	2.35	4.97	7.91	10.5	13.1	16.9	131	490	619	684	697
10	0.00	0.00	0.00	0.00	0.15	0.31	0.72	1.28	2.23	4.40	7.53	9.06	11.8	15.1	56.4	308	540	614	643
20	0.00	0.00	0.00	0.00	0.14	0.28	0.59	1.03	1.88	3.09	6.51	7.83	10.0	11.4	13.4	17.2	66.3	141	185
30	0.00	0.00	0.00	0.00	0.07	0.19	0.38	0.77	1.22	2.04	3.14	5.84	8.19	7.95	10.2	9.79	11.1	12.1	12.4
40	0.00	0.00	0.00	0.00	0.01	0.15	0.25	0.42	0.75	1.10	1.74	2.36	3.27	4.72	7.65	9.45	8.22	7.67	7.43
50	0.00	0.00	0.00	0.00	0.01	0.02	0.15	0.21	0.34	0.52	0.78	1.00	1.33	1.76	2.08	2.41	2.69	2.88	2.97
60	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.06	0.16	0.19	0.27	0.35	0.44	0.55	0.68	0.77	0.84	0.88	0.90
70	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.02	0.03	0.04	0.07	0.12	0.16	0.17	0.19	0.20	0.21	0.21
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.02	0.02
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.11	0.14	0.15
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.09	0.23	0.42	0.62	0.77	0.86	0.89
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.19	0.45	0.81	1.18	1.52	1.80	1.96	1.99
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.12	0.41	0.85	1.36	1.85	2.30	2.59	2.67	2.71
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.19	0.52	1.05	1.60	2.13	2.57	2.72	2.84	2.91

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:11.94V I:0.7078A P:5.352W PF:0.6335 Freq:59.98Hz Lamp Flux:200.394x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Micro	WEIGHT:
SPEC.:5.5W 3000K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-029

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	2.87	2.91	3.05	2.89	2.42	1.88	1.35	0.77	0.32	0.11	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-170	2.93	3.05	3.06	2.74	2.28	1.75	1.18	0.72	0.29	0.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-160	2.96	2.79	2.53	2.16	1.76	1.30	0.85	0.46	0.17	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-150	1.96	1.81	1.60	1.33	1.03	0.71	0.39	0.18	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-140	0.86	0.78	0.65	0.50	0.33	0.19	0.06	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-130	0.13	0.10	0.08	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.15	0.15	0.15	0.12	0.05	0.03	0.02	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.74	0.69	0.61	0.52	0.44	0.34	0.30	0.21	0.18	0.13	0.04	0.02	0.01	0.00	0.00	0.00	0.00	0.00	
-50	2.38	2.27	2.10	1.84	1.50	1.19	0.95	0.72	0.47	0.31	0.20	0.13	0.03	0.02	0.00	0.00	0.00	0.00	
-40	7.87	7.88	6.94	5.13	3.76	2.84	2.19	1.60	1.08	0.74	0.39	0.23	0.14	0.03	0.00	0.00	0.00	0.00	
-30	9.60	9.11	9.25	7.58	6.97	8.19	4.45	2.83	1.98	1.21	0.79	0.38	0.20	0.08	0.03	0.00	0.00	0.00	
-20	50.2	20.3	11.3	10.8	8.66	7.54	7.88	5.18	2.86	1.89	1.07	0.58	0.28	0.13	0.03	0.00	0.00	0.00	
-10	568	467	191	24.4	10.5	8.49	7.21	9.06	3.83	2.26	1.31	0.76	0.34	0.16	0.03	0.00	0.00	0.00	
0	681	609	430	87.9	10.9	9.32	7.75	8.54	4.29	2.42	1.43	0.83	0.35	0.16	0.03	0.00	0.00	0.00	
10	609	519	262	40.3	10.8	8.76	7.48	9.16	4.00	2.31	1.34	0.77	0.34	0.16	0.03	0.00	0.00	0.00	
20	135	59.6	14.6	11.1	9.19	8.47	7.83	6.03	3.01	1.95	1.10	0.61	0.29	0.14	0.03	0.00	0.00	0.00	
30	11.7	10.2	9.30	9.21	7.28	8.99	5.43	3.09	2.09	1.28	0.82	0.41	0.22	0.09	0.03	0.00	0.00	0.00	
40	7.75	8.54	9.61	7.44	4.56	3.23	2.41	1.78	1.15	0.79	0.45	0.26	0.15	0.04	0.01	0.00	0.00	0.00	
50	2.88	2.70	2.43	2.10	1.78	1.36	1.04	0.81	0.54	0.36	0.23	0.15	0.05	0.03	0.00	0.00	0.00	0.00	
60	0.88	0.85	0.78	0.68	0.57	0.45	0.36	0.28	0.21	0.16	0.09	0.04	0.02	0.00	0.00	0.00	0.00	0.00	
70	0.21	0.20	0.19	0.17	0.15	0.13	0.08	0.05	0.04	0.03	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.02	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
130	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
140	0.19	0.21	0.15	0.14	0.11	0.07	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
150	0.96	0.95	0.88	0.73	0.56	0.39	0.20	0.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
160	2.09	2.04	1.88	1.61	1.32	0.96	0.63	0.33	0.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
170	2.76	2.81	2.75	2.43	2.03	1.55	1.03	0.63	0.25	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
180	2.87	2.91	3.05	2.89	2.42	1.88	1.35	0.77	0.32	0.11	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-29

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: