

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		1558.8 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	69.4V x 71.2H
	At 50% of Imax	44.2V x 45.7H
	At 90% of Imax	28.0V x 31.1H
Beam Flux	Total	1000.2 lumens per klm.
	To 10% of Imax	823.2 lumens per klm.
	To 50% of Imax	585.5 lumens per klm.
	To 90% of Imax	278.3 lumens per klm.
	Upward LOR	1.2 %
	Downward LOR	98.8 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-05-04

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.05V I:1.159A P:9.663W PF:0.6915 Freq:59.98Hz Lamp Flux:385.175x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Macro RGBWW 10W GREEN	WEIGHT:
SPEC.:40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

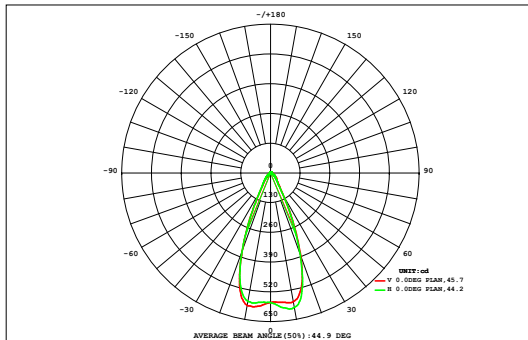

DATA OF LAMP		Eff:39.86lm/W	
MODEL	Z9B1-10W-A	Imax (cd)	600.4
NOMINAL POWER (W)	10	AVAILABILITY (%)	82.1
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	316.2
NOMINAL FLUX (lm)	385.175	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	385.2
TEST VOLTAGE (V)	12	θ @50% (H,V)	46,44DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.00	0.01	0.02	0.05	0.07	0.08	0.09	0.09	0.08	0.07	0.05	0.03	0.01	0.00	0.00	0.00	0.66	0.00
72	0.00	0.00	0.00	0.01	0.02	0.05	0.07	0.08	0.09	0.09	0.08	0.07	0.05	0.03	0.01	0.00	0.00	0.00	1.82	0.00
64	0.00	0.00	0.02	0.05	0.09	0.13	0.17	0.20	0.22	0.22	0.20	0.17	0.14	0.10	0.06	0.03	0.00	0.00	3.38	0.00
56	0.00	0.02	0.06	0.11	0.17	0.24	0.31	0.36	0.39	0.40	0.37	0.32	0.25	0.18	0.12	0.07	0.02	0.00	5.37	0.00
48	0.00	0.04	0.09	0.16	0.26	0.37	0.48	0.57	0.63	0.64	0.59	0.51	0.40	0.29	0.18	0.10	0.05	0.01	8.30	1.11
40	0.01	0.06	0.12	0.23	0.37	0.54	0.73	0.92	1.06	1.08	0.95	0.77	0.58	0.40	0.26	0.14	0.07	0.02	16.1	11.7
32	0.02	0.07	0.16	0.30	0.49	0.76	1.20	2.03	2.83	2.87	2.14	1.30	0.83	0.54	0.33	0.18	0.08	0.03	35.0	31.6
24	0.03	0.08	0.19	0.36	0.61	1.10	2.61	5.13	7.02	7.07	5.30	2.85	1.24	0.69	0.41	0.22	0.10	0.03	56.4	53.5
	0.03	0.09	0.21	0.41	0.73	1.71	4.84	8.84	10.9	10.9	8.94	5.15	1.98	0.84	0.47	0.25	0.11	0.04	65.3	62.5
	0.03	0.10	0.23	0.43	0.81	2.24	6.42	10.6	11.4	11.3	10.4	6.78	2.63	0.95	0.51	0.27	0.11	0.04	64.5	61.8
	0.03	0.10	0.23	0.43	0.81	2.22	6.39	10.5	11.2	11.1	10.3	6.74	2.61	0.95	0.51	0.27	0.11	0.04	54.9	52.0
	0.03	0.09	0.21	0.41	0.74	1.65	4.74	8.65	10.5	10.5	8.76	5.05	1.93	0.84	0.47	0.25	0.11	0.04	33.8	30.3
-24	0.03	0.08	0.19	0.36	0.62	1.09	2.45	4.92	6.76	6.82	5.10	2.69	1.23	0.70	0.41	0.22	0.10	0.03	15.2	10.6
-32	0.02	0.07	0.16	0.30	0.49	0.76	1.17	1.86	2.52	2.57	1.96	1.27	0.84	0.54	0.33	0.18	0.08	0.03	8.36	1.07
-40	0.01	0.06	0.12	0.23	0.37	0.54	0.74	0.93	1.07	1.08	0.97	0.78	0.58	0.40	0.25	0.14	0.07	0.02	5.39	0.00
-48	0.00	0.04	0.09	0.16	0.26	0.37	0.48	0.58	0.64	0.65	0.60	0.51	0.40	0.28	0.17	0.10	0.05	0.01	3.30	0.00
-56	0.00	0.02	0.06	0.11	0.16	0.23	0.30	0.35	0.39	0.39	0.36	0.31	0.24	0.17	0.12	0.07	0.02	0.00	1.79	0.00
-64	0.00	0.00	0.02	0.06	0.10	0.13	0.16	0.19	0.21	0.21	0.19	0.17	0.14	0.11	0.07	0.03	0.00	0.00	0.71	0.00
-72	0.00	0.00	0.00	0.01	0.03	0.05	0.07	0.09	0.10	0.10	0.09	0.08	0.05	0.03	0.01	0.00	0.00	0.00	---	---
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)	16	24	32	40	48	56	64	72			
Φ t	0.25	0.93	2.16	4.11	7.12	14.2	33.3	56.7	68.0	67.9	57.4	35.5	16.1	8.07	4.69	2.50	1.09	0.34	380	---
Φ a	0.00	0.00	0.00	0.00	0.47	9.06	28.9	52.6	64.0	63.9	53.3	31.2	11.2	1.51	0.00	0.00	0.00	0.00	---	316


one-half-peak spread: U:14.0,D:13.4 , L:14.5,R:14.5 NEMA Beam Type: Type 5 x 4 (H x V)

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-05-04

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.05V I:1.159A P:9.663W PF:0.6915 Freq:59.98Hz Lamp Flux:385.175x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Macro RGBWW 10W GREEN	WEIGHT:
SPEC.:40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

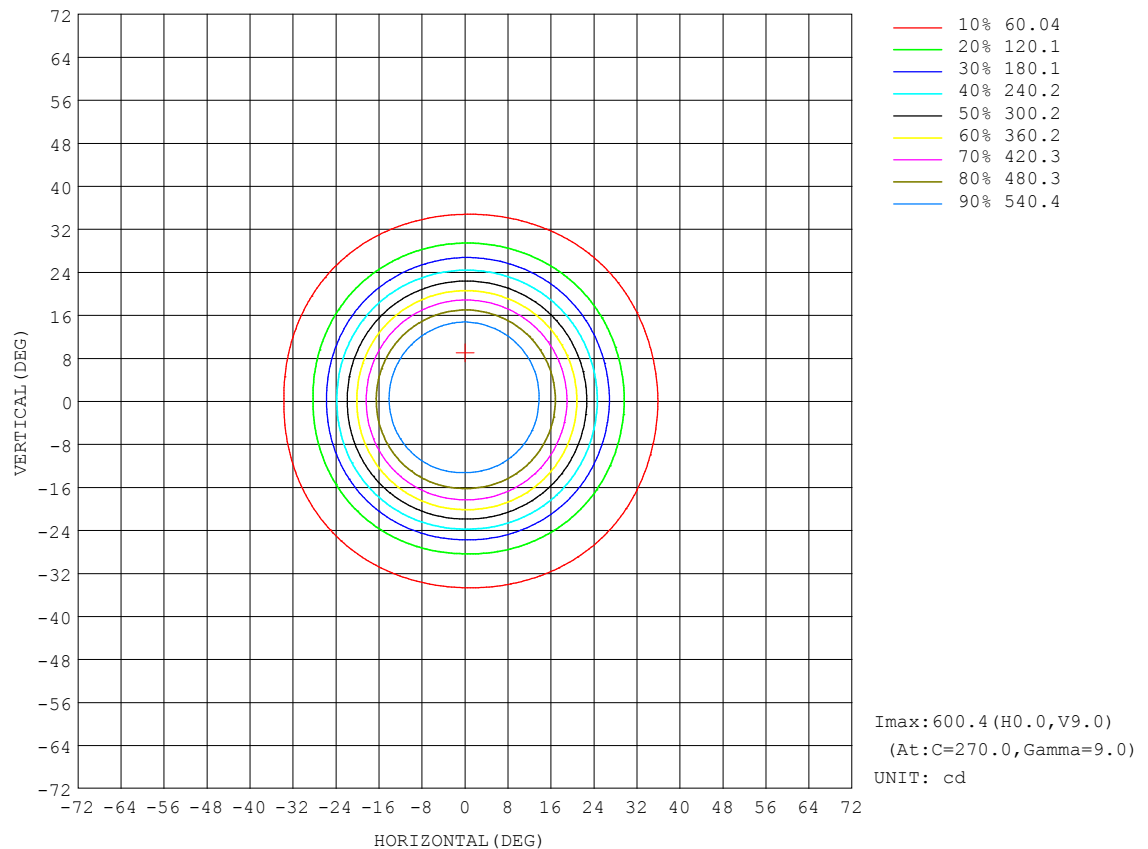


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-05-04

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.05V I:1.159A P:9.663W PF:0.6915 Freq:59.98Hz Lamp Flux:385.175x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Macro RGBWW 10W GREEN	WEIGHT:
SPEC.:40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

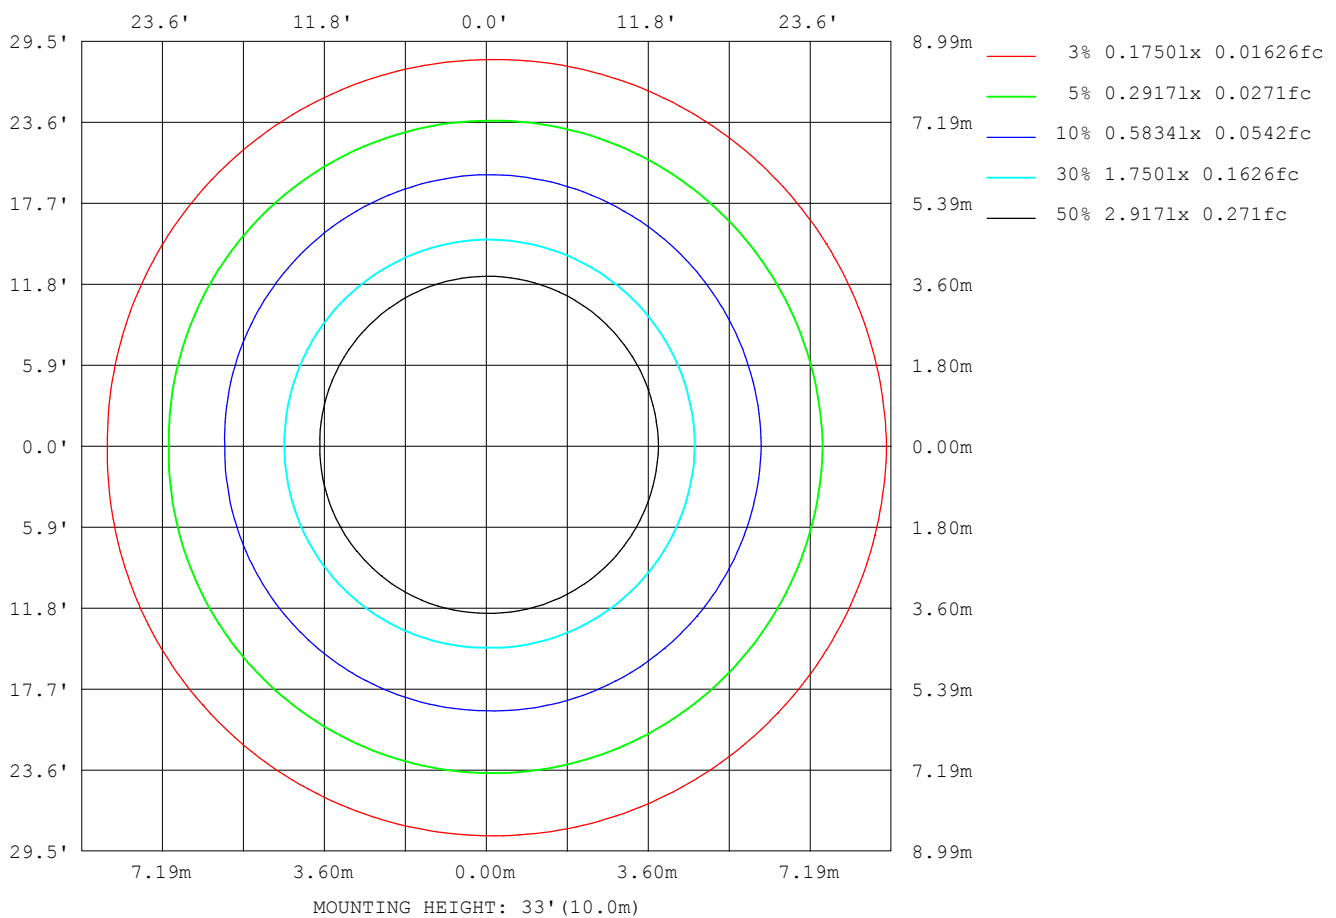

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-05-04

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

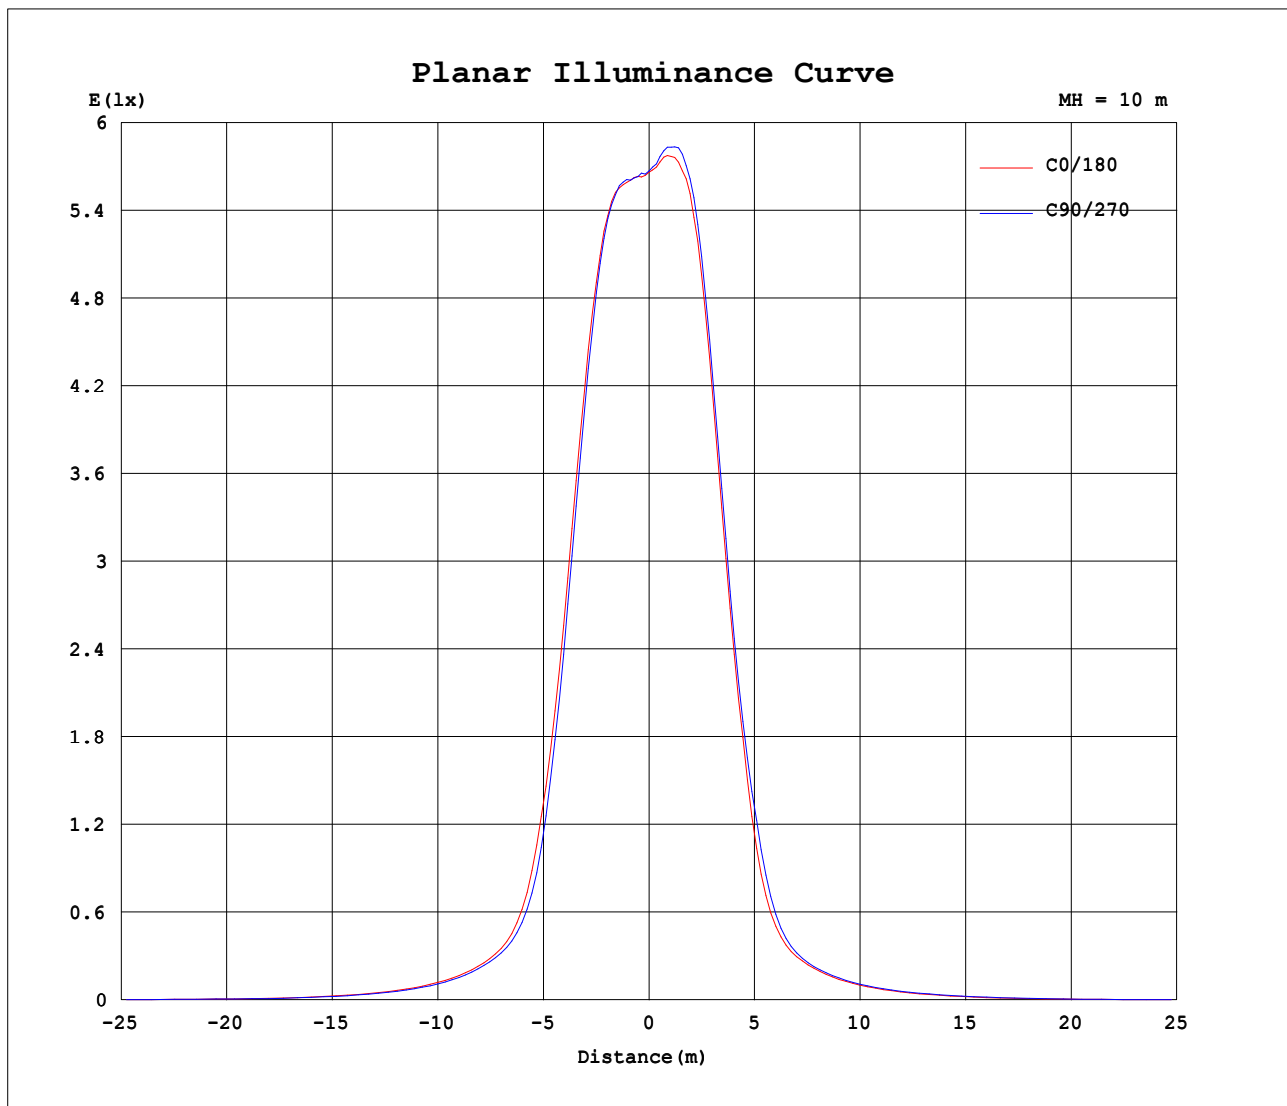


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-05-04

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.05V I:1.159A P:9.663W PF:0.6915 Freq:59.98Hz Lamp Flux:385.175x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Macro RGBWW 10W GREEN	WEIGHT:
SPEC.:40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

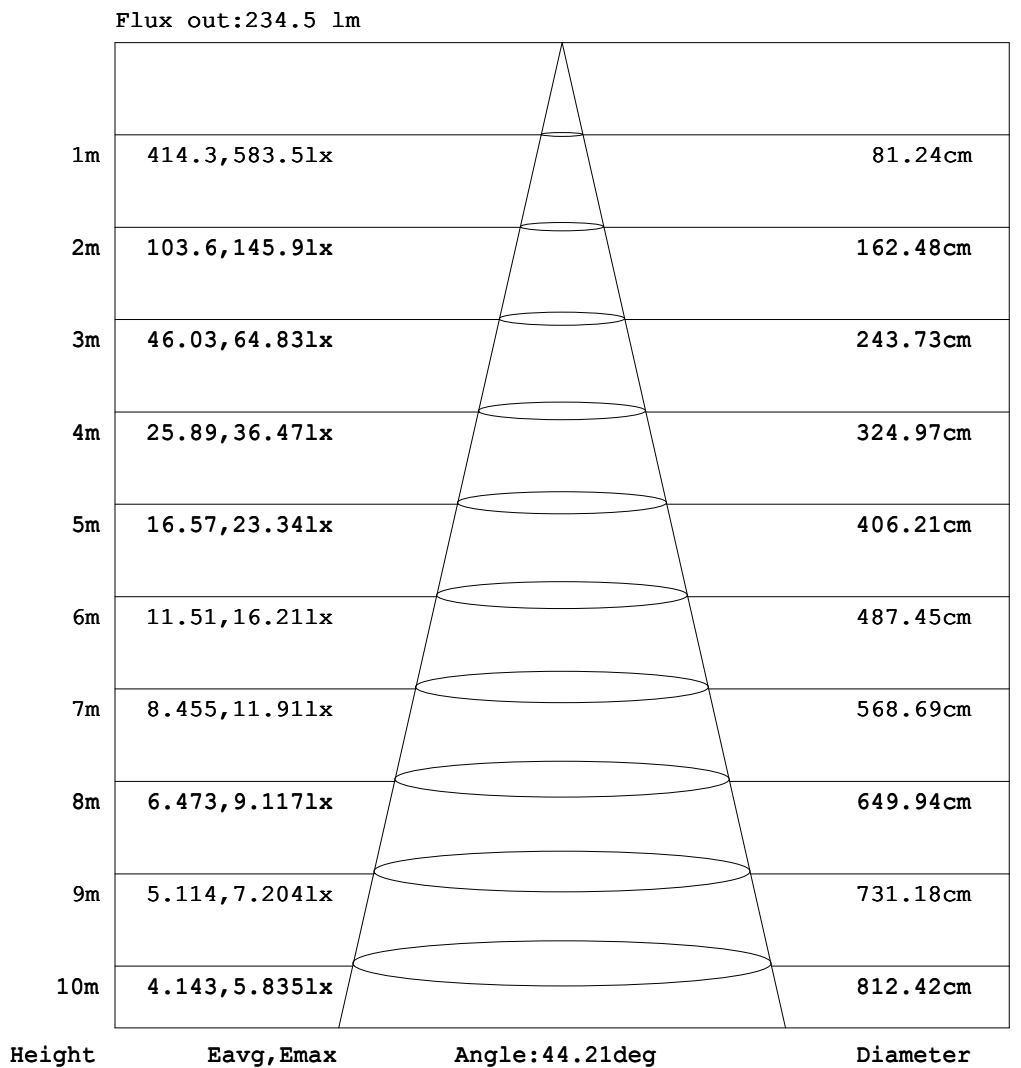

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-05-04

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.05V I:1.159A P:9.663W PF:0.6915 Freq:59.98Hz Lamp Flux:385.175x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Macro RGBWW 10W GREEN	WEIGHT:
SPEC.:40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.20	0.47	0.89	1.44	2.06	2.70	3.28	3.80	4.27	4.70	4.90
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.20	0.47	0.88	1.41	2.02	2.65	3.26	3.76	4.18	4.48	4.66
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.14	0.36	0.68	1.12	1.63	2.17	2.71	3.18	3.59	3.87	4.06
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.05	0.20	0.41	0.70	1.05	1.44	1.83	2.19	2.49	2.72	2.85
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.06	0.16	0.30	0.49	0.70	0.93	1.15	1.34	1.49	1.58
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.07	0.13	0.21	0.29	0.38	0.46	0.52	0.56
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.04	0.06	0.08	0.09
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.08	0.33	0.66	1.07	1.62	2.20	2.73	3.15	3.43	3.56
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.17	0.79	2.02	3.79	5.41	6.56	7.45	8.17	8.84	9.40	9.84	10.1	10.3
-50	0.00	0.00	0.00	0.00	0.00	0.50	1.95	4.50	6.53	8.05	9.60	11.7	14.2	16.5	18.5	20.2	21.5	22.4	22.8
-40	0.00	0.00	0.00	0.00	0.33	2.01	5.18	7.41	9.51	12.8	16.6	20.4	24.4	28.4	32.5	36.2	39.4	41.7	42.7
-30	0.00	0.00	0.00	0.00	1.01	4.21	7.11	9.64	13.9	18.7	24.1	30.1	37.4	45.6	54.8	65.8	79.1	91.1	95.8
-20	0.00	0.00	0.00	0.09	1.86	5.71	8.45	12.4	17.8	24.0	31.4	41.1	53.7	76.3	126	209	288	346	366
-10	0.00	0.00	0.00	0.22	2.54	6.39	9.36	14.4	20.4	27.6	37.2	50.4	76.6	152	288	433	534	569	570
0	0.00	0.00	0.00	0.27	2.76	6.58	9.66	15.1	21.3	28.9	39.2	54.1	91.8	203	364	522	588	584	566
10	0.00	0.00	0.00	0.22	2.53	6.37	9.39	14.5	20.5	27.6	37.1	50.3	77.9	158	292	439	547	589	597
20	0.00	0.00	0.00	0.10	1.84	5.65	8.49	12.6	17.9	23.9	31.2	40.7	53.5	79.0	137	220	298	356	380
30	0.00	0.00	0.00	0.01	1.03	4.10	7.07	9.75	14.2	18.9	24.0	29.9	37.0	44.9	54.5	67.5	84.7	101	109
40	0.00	0.00	0.00	0.00	0.34	1.96	5.01	7.37	9.66	13.2	16.9	20.6	24.4	28.2	32.1	35.7	38.7	40.7	41.5
50	0.00	0.00	0.00	0.00	0.01	0.54	1.90	4.27	6.40	8.09	9.83	12.3	14.8	17.0	18.9	20.5	21.8	22.6	22.9
60	0.00	0.00	0.00	0.00	0.00	0.01	0.20	0.87	1.94	3.49	5.03	6.34	7.32	8.23	9.05	9.72	10.3	10.6	10.8
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.12	0.40	0.78	1.18	1.59	2.05	2.46	2.78	2.98	3.06
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.11	0.20	0.34	0.47	0.58	0.66	0.72	0.74
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.08	0.23	0.44	0.69	0.98	1.28	1.53	1.75	1.85	1.87
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.08	0.25	0.52	0.88	1.32	1.79	2.22	2.62	2.91	3.09	3.11
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.16	0.40	0.77	1.27	1.84	2.42	2.99	3.44	3.82	4.09	4.14
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.20	0.47	0.89	1.44	2.06	2.70	3.28	3.80	4.27	4.70	4.89

H(β) Range:-90 - 90DEG
 H(β) Interval: 0.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:ADMIN
 Test Date:2023-05-04

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
 Humidity:65.0%
 Test Distance:13.563m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.05V I:1.159A P:9.663W PF:0.6915 Freq:59.98Hz Lamp Flux:385.175x1 lm																	
NAME: LED LANDSCAPE LIGHT									TYPE:Macro RGBWW 10W GREEN						WEIGHT:		
SPEC.:40°LENS									DIM.:						SERIAL No.:1		
MFR.: EVERFINE									SUR.:						Shielding Angle:		

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	4.77	4.57	4.31	3.93	3.34	2.70	2.03	1.42	0.89	0.44	0.16	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-170	4.60	4.44	4.16	3.72	3.14	2.52	1.92	1.33	0.80	0.43	0.16	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-160	3.97	3.78	3.45	3.03	2.54	2.03	1.51	1.04	0.60	0.31	0.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-150	2.79	2.63	2.37	2.07	1.70	1.33	0.96	0.61	0.34	0.16	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-140	1.53	1.43	1.27	1.09	0.85	0.63	0.44	0.26	0.14	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-130	0.54	0.50	0.43	0.35	0.26	0.19	0.10	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.08	0.06	0.04	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	3.51	3.30	2.93	2.43	1.86	1.28	0.76	0.40	0.17	0.06	0.04	0.03	0.00	0.00	0.00	0.00	0.00	0.00	
-60	10.2	10.0	9.68	9.18	8.56	7.95	7.17	6.13	4.57	2.61	1.06	0.28	0.06	0.04	0.00	0.00	0.00	0.00	
-50	22.7	22.1	21.0	19.4	17.5	15.3	12.8	10.4	8.78	7.43	5.52	2.68	0.62	0.09	0.03	0.00	0.00	0.00	
-40	42.3	40.6	37.8	34.3	30.4	26.4	22.3	18.4	14.4	10.5	8.36	6.30	2.84	0.45	0.06	0.00	0.00	0.00	
-30	93.3	82.8	69.9	58.7	49.3	40.9	33.3	26.8	21.1	16.0	10.8	8.21	5.48	1.54	0.10	0.00	0.00	0.00	
-20	350	296	220	141	86.3	60.1	46.1	35.6	27.3	20.5	14.5	9.65	6.98	2.77	0.25	0.02	0.00	0.00	
-10	564	531	444	306	175	90.5	58.0	43.0	32.1	23.8	17.0	10.7	7.73	3.75	0.36	0.05	0.00	0.00	
0	567	572	522	389	230	113	64.3	46.2	34.1	25.2	17.9	11.1	8.00	4.12	0.40	0.06	0.00	0.00	
10	585	545	450	310	181	91.9	57.9	42.9	32.0	23.8	17.1	10.8	7.72	3.74	0.37	0.05	0.00	0.00	
20	360	305	231	152	89.0	59.9	45.8	35.5	27.3	20.6	14.7	9.68	6.92	2.76	0.26	0.02	0.00	0.00	
30	104	88.4	71.6	58.4	48.6	40.5	33.1	26.8	21.3	16.2	10.9	8.17	5.37	1.56	0.11	0.00	0.00	0.00	
40	41.3	39.8	37.2	33.9	30.2	26.3	22.5	18.7	14.8	10.7	8.32	6.13	2.80	0.47	0.06	0.00	0.00	0.00	
50	22.9	22.3	21.3	19.8	18.1	16.0	13.3	10.6	8.83	7.30	5.29	2.63	0.66	0.10	0.03	0.00	0.00	0.00	
60	10.7	10.4	10.00	9.40	8.63	7.82	6.95	5.74	4.28	2.54	1.14	0.31	0.07	0.04	0.00	0.00	0.00	0.00	
70	3.06	2.93	2.67	2.29	1.82	1.39	0.89	0.47	0.21	0.08	0.04	0.03	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
130	0.14	0.13	0.10	0.09	0.07	0.06	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
140	0.77	0.75	0.69	0.63	0.49	0.34	0.24	0.13	0.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
150	1.92	1.88	1.71	1.52	1.25	0.96	0.70	0.42	0.22	0.11	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
160	3.19	3.11	2.89	2.55	2.16	1.71	1.26	0.87	0.48	0.25	0.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
170	4.21	4.08	3.84	3.45	2.91	2.35	1.78	1.23	0.74	0.39	0.14	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
180	4.77	4.57	4.31	3.93	3.34	2.70	2.03	1.42	0.89	0.44	0.16	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-05-04

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: