




Together, we are brighter.

LAB-206

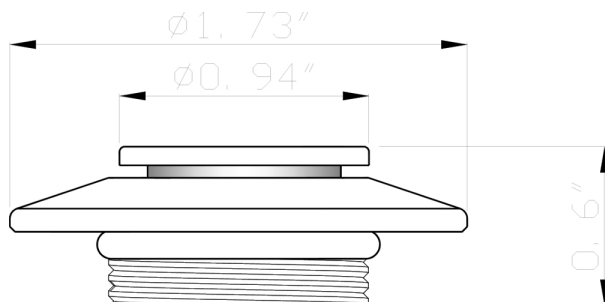

PROJECT: _____

TYPE: _____

CAT #: _____

DESCRIPTION

Accessory, Brass - Antique, Nano,
Recessed, Circular, Halo

SPECIFICATIONS

Construction	Brass
Finish	Antique
Light Warranty	Lifetime

FINISHES



Antique

NOTES

Lumien Lighting

770-485-9002
orders@lumienlighting.com
www.lumienlighting.com

Lumien Lighting reserves the right
to modify product specifications
without notification. © 2023
Lumien Enterprise Inc.

	MODULE TYPE (required)	WATTS	COLOR TEMP	BEAM SPREAD	FINISH	ACCESSORIES
LAB-206	CORE: N4B1	- - - - 1.5W 2.5W 2700K 3000K	15° 30°	Aluminum	+	Mounts - Ground (Optional) LAP-007 Plastic, PVC for Nano Modules Mounts - Recessed (Optional) LAB-121 Stainless Steel, Nano, 50mm, Soffit LAB-183 Stainless Steel, Nano, 25mm, Soffit Accessories - Lens (Optional) LAB-127 BK Aluminum, Nano, Banded Hex Louver Accessories - Pro Series (Optional) LP-REMOTE LumienPRO Remote
LAB-206	CORE: N4B2	- - - - 2W 2700K 3000K	30°	Aluminum	+	
LAB-206	PRO: N7B1	- - - - 2.5W 2700-5700K	30°	Aluminum	+	
LAB-206	PRO: N8B1	- - - - 2.5W 2700-5700K	30°	Aluminum	+	

	CORE	CORE	CORE	PRO
	N4B1-1.5W-27K-15-A N4B1-1.5W-27K-30-A N4B1-1.5W-30K-15-A N4B1-1.5W-30K-30-A	N4B1-2.5W-27K-15-A N4B1-2.5W-27K-30-A N4B1-2.5W-30K-15-A N4B1-2.5W-30K-30-A	N4B2-2W-27K-30-A N4B2-2W-30K-30-A	N7B1-2.5W-30-A
Construction	Brass	Brass	Brass	Brass
Finish	Aluminum	Aluminum	Aluminum	Aluminum
Input Voltage	10-15V	10-15V	10-15V	10-15V
Wattage (Volt Amps)	1.5W (2.56)	2.5W (3.97)	2W (3.21)	2.5W (4.02)
Module Lumens	100 Lm, 141 Lm, 113 Lm,	163 Lm, 217 Lm, 172 Lm,	186 Lm	121-132 Lm
Color Temperature	2700K, 3000K	2700K, 3000K	2700K, 3000K	2700-5700K
Beam Spread	15°, 30°	30°, 15°	30°	30°
Lead Wire Length	6'	6'	6'	6'
CRI	80+	80+	80+	80+
RGB	No	No	No	No
Dimmable	Primary Dimming	Primary Dimming	Primary Dimming	With LumienPRO Remote
Rated Life	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs
Warranty	10 Years	10 Years	10 Years	10 Years
Core Drill Size	-	-	-	-

PRO

N8B1-2.5W-27K-30-A N8B1-2.5W-30K-30-A

Construction	Brass
Finish	Aluminum
Input Voltage	10-15V
Wattage (Volt Amps)	2.5W (4.02)
Module Lumens	27K: 91 Lm, R: 29 Lm, G:
Color Temperature	2700-5700K
Beam Spread	30°
Lead Wire Length	6'
CRI	80+
RGB	Yes
Dimmable	With LumienPRO Remote
Rated Life	50,000 Hrs
Warranty	10 Years
Core Drill Size	-

Mounts - Ground**LAP-007**

Accessory, Plastic, PVC for
Nano Modules

Mounts - Recessed**LAB-121**

Accessory, Stainless Steel,
Nano, 50mm, Soffit Bracket

**LAB-183**

Accessory, Stainless Steel,
Nano, 25mm, Soffit Bracket

Accessories - Lens**LAB-127**

Accessory, Aluminum -
Black, Nano, Banded Hex
Louver

Accessories - Pro Series**LP-REMOTE**

LumienPRO Remote
(Functionality determined
by the Light Fixture)