

D5A1-15W-27K-BZ
D5A1-15W-30K-BZ



D5A1-15W-27K-BK
D5A1-15W-30K-BK

Standard Dimming
Spot Light
Black or Bronze Aluminum



SPECIFICATIONS

Fixture Type	Fixture Components	Fixture Material	Fixture Style	Watts	Color Temperature	Finish
D (Directional)	5 (Integrated Variable)	A (Aluminum)	1 (Up)	15W	27K (2700K) 30K (3000K)	BZ (Bronze) BK(Black)

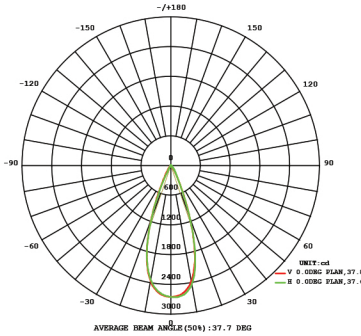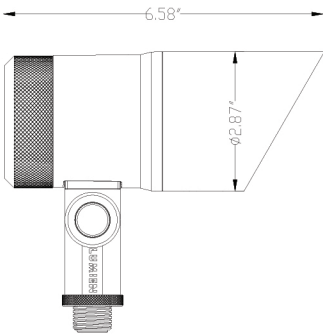

Construction: Aluminum
Finish: Powder Coat Bronze or Black
Lead Wire: 6ft long
Mounting: LAP-002
Light Source: Integrated LED
Wattage: 15W
Operating Voltage: 10-15V
Lumens: 1200 LM
Beam Spread: 40°
Color Temperature: 2700K or 3000K
Volt Amps: 16.12
RGB: No
CRI: 80+
Rated life: 50,000 Hrs
Dimmable: Primary Dimming Capable

APPLICATION

Environment: Wet, Damp or Dry Area approved.
Installation: Mounts to our 12" Spike (LAP-001) or 8" Spike (LAP-002)

Other Optic Lenses Available (Ordered Separately):
LAP-010 (15* Beam Spread)
LAP-012 (60* Beam Spread)

ACCESSORIES



LAA-004



LAA-007



LAP-001



TR-120

WARRANTY

10 Year Warranty on the Housing,
10 Year Warranty on the LED Light Source

CERTIFICATION

UL Listed I File #E501872

Lumien Lighting reserves the right to modify the design of our products at any time and data listed on spec sheets is subject to change.