

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		2347.9 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	57.2V x 58.5H
	At 50% of Imax	37.8V x 38.2H
	At 90% of Imax	19.6V x 19.9H
Beam Flux	Total	1000.3 lumens per klm.
	To 10% of Imax	881.8 lumens per klm.
	To 50% of Imax	628.6 lumens per klm.
	To 90% of Imax	203.4 lumens per klm.
	Upward LOR	1.4 %
	Downward LOR	98.6 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-02-10

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.14V I:1.200A P:13.61W PF:0.9340 Freq:59.99Hz Lamp Flux:1101.4x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot Light	WEIGHT:
SPEC.:15W 2700K 40°LENS	DIM.:	SERIAL No.:2
MFR.: EVERFINE	SUR.:	Shielding Angle:Uplight Shroud

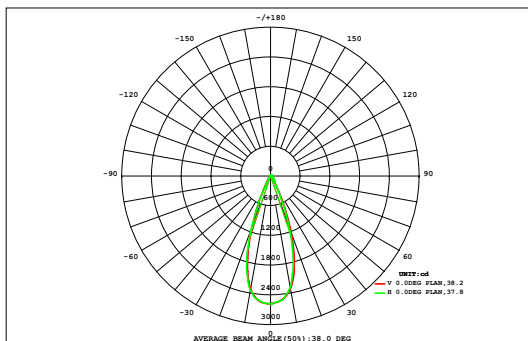

DATA OF LAMP		Eff:80.94lm/W	
MODEL	D5A1-15W-27K-BZ	Imax (cd)	2586
NOMINAL POWER (W)	15	AVAILABILITY (%)	87.9
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	968.6
NOMINAL FLUX (lm)	1101.4	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	1101
TEST VOLTAGE (V)	12	θ @50% (H,V)	38,38DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.05	0.09	0.14	0.21	0.29	0.38	0.46	0.54	0.60	0.60	0.55	0.48	0.40	0.31	0.23	0.16	0.10	0.06	5.66	0.00
45	0.05	0.09	0.14	0.21	0.29	0.38	0.46	0.54	0.60	0.60	0.55	0.48	0.40	0.31	0.23	0.16	0.10	0.06	5.66	0.00
40	0.07	0.12	0.20	0.30	0.43	0.56	0.70	0.83	0.91	0.92	0.85	0.74	0.60	0.46	0.34	0.23	0.15	0.09	8.51	0.00
35	0.09	0.17	0.28	0.43	0.62	0.84	1.07	1.28	1.43	1.45	1.33	1.14	0.91	0.68	0.48	0.32	0.20	0.11	12.8	0.00
30	0.12	0.22	0.37	0.59	0.89	1.28	1.78	2.32	2.70	2.74	2.42	1.91	1.41	1.00	0.67	0.43	0.27	0.15	21.3	10.9
25	0.14	0.28	0.48	0.80	1.32	2.21	3.57	5.01	5.93	6.01	5.22	3.85	2.47	1.51	0.93	0.57	0.34	0.19	40.8	33.9
20	0.17	0.33	0.60	1.09	2.09	4.10	6.83	9.34	10.8	10.8	9.59	7.25	4.56	2.44	1.29	0.73	0.41	0.22	72.6	67.2
15	0.19	0.38	0.73	1.47	3.29	6.64	10.6	13.8	15.4	15.4	13.9	11.0	7.27	3.84	1.78	0.90	0.48	0.25	107	102
10	0.20	0.41	0.83	1.87	4.54	8.96	13.6	16.9	18.2	18.2	16.9	13.9	9.65	5.29	2.32	1.06	0.53	0.27	134	129
5	0.20	0.41	0.89	2.14	5.32	10.3	15.2	18.3	19.4	19.3	18.1	15.4	11.0	6.22	2.71	1.16	0.56	0.28	147	143
0	0.19	0.39	0.85	2.11	5.32	10.4	15.3	18.3	19.4	19.3	18.2	15.5	11.1	6.23	2.68	1.12	0.53	0.26	147	143
-5	0.16	0.34	0.74	1.76	4.52	9.09	13.9	17.1	18.5	18.5	17.1	14.2	9.77	5.27	2.21	0.96	0.47	0.23	135	131
-10	0.13	0.28	0.57	1.27	3.18	6.73	10.9	14.2	15.9	16.0	14.4	11.3	7.36	3.73	1.58	0.75	0.38	0.20	109	105
-15	0.10	0.21	0.41	0.82	1.82	3.99	6.98	9.73	11.4	11.4	9.98	7.40	4.46	2.16	1.02	0.54	0.29	0.15	72.8	67.9
-20	0.07	0.14	0.27	0.50	0.92	1.81	3.32	4.94	6.00	6.07	5.15	3.60	2.07	1.11	0.63	0.36	0.20	0.11	37.3	31.2
-25	0.04	0.09	0.16	0.28	0.47	0.75	1.17	1.69	2.06	2.10	1.79	1.30	0.87	0.58	0.36	0.22	0.14	0.07	14.1	4.76
-30	0.02	0.05	0.09	0.15	0.22	0.33	0.44	0.54	0.58	0.59	0.58	0.51	0.40	0.28	0.20	0.14	0.08	0.04	5.24	0.00
-35	0.01	0.03	0.04	0.07	0.10	0.13	0.16	0.18	0.18	0.19	0.20	0.19	0.17	0.14	0.11	0.08	0.05	0.03	2.04	0.00
-40	0.01	0.01	0.02	0.03	0.04	0.05	0.05	0.05	0.04	0.04	0.06	0.07	0.07	0.07	0.05	0.04	0.02	0.01	0.74	0.00
-45	0.01	0.01	0.02	0.03	0.04	0.05	0.05	0.05	0.04	0.04	0.06	0.07	0.07	0.07	0.05	0.04	0.02	0.01	0.74	0.00
	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)	10	15	20	25	30	35	40	45			
Φ t	1.97	3.94	7.67	15.9	35.4	68.5	106	135	149	150	136	110	74.5	41.3	19.6	9.76	5.19	2.74	1072	---
Φ a	0.00	0.00	0.00	5.88	28.7	62.8	101	130	145	145	131	105	68.9	34.7	10.8	0.00	0.00	0.00	---	969

one-half-peak spread: U:18.3,D:17.7 , L:17.7,R:20.7


NEMA Beam Type: Type 4

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-02-10

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.14V I:1.200A P:13.61W PF:0.9340 Freq:59.99Hz Lamp Flux:1101.4x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot Light	WEIGHT:
SPEC.:15W 2700K 40°LENS	DIM.:	SERIAL No.:2
MFR.: EVERFINE	SUR.:	Shielding Angle:Uplight Shroud

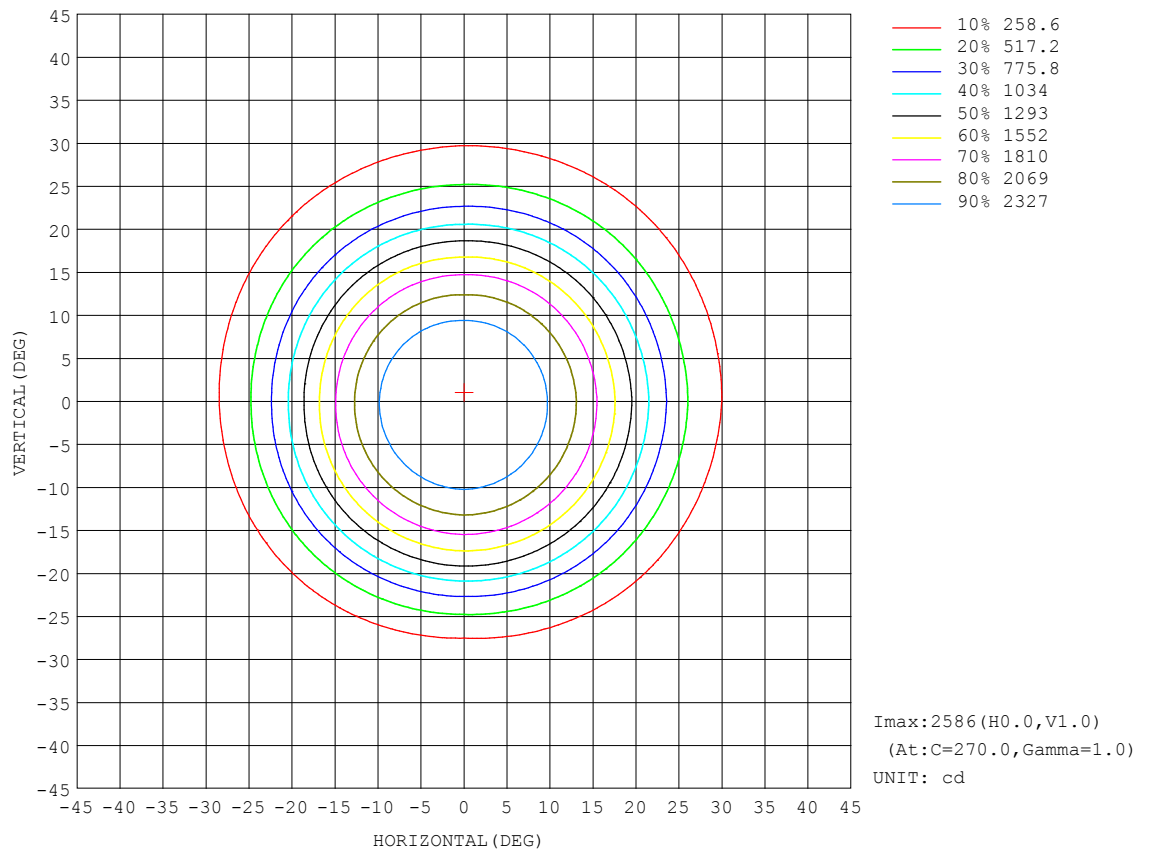


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-02-10

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.14V I:1.200A P:13.61W PF:0.9340 Freq:59.99Hz Lamp Flux:1101.4x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot Light	WEIGHT:
SPEC.:15W 2700K 40°LENS	DIM.:	SERIAL No.:2
MFR.: EVERFINE	SUR.:	Shielding Angle:Uplight Shroud

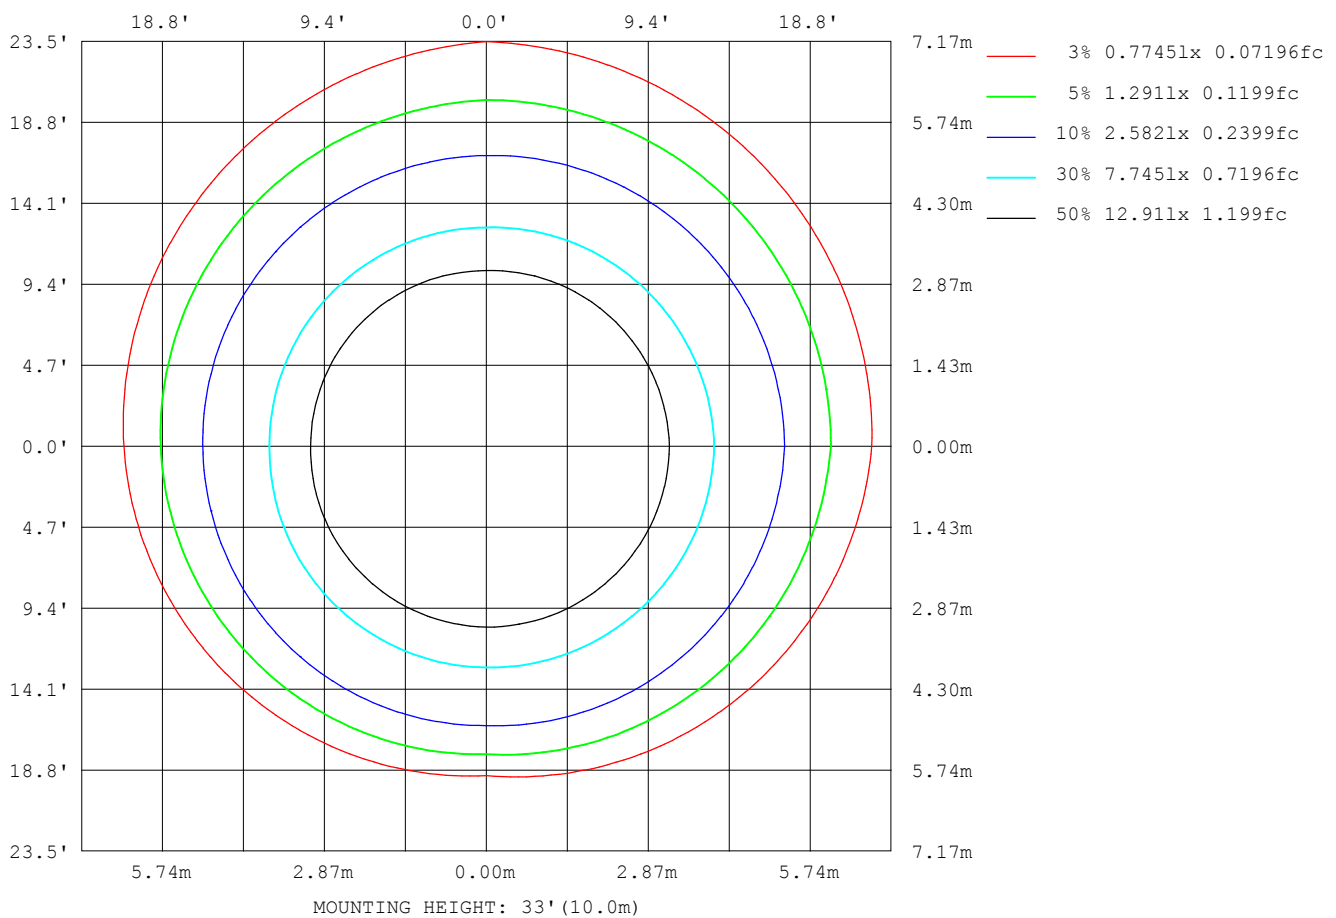

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-02-10

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

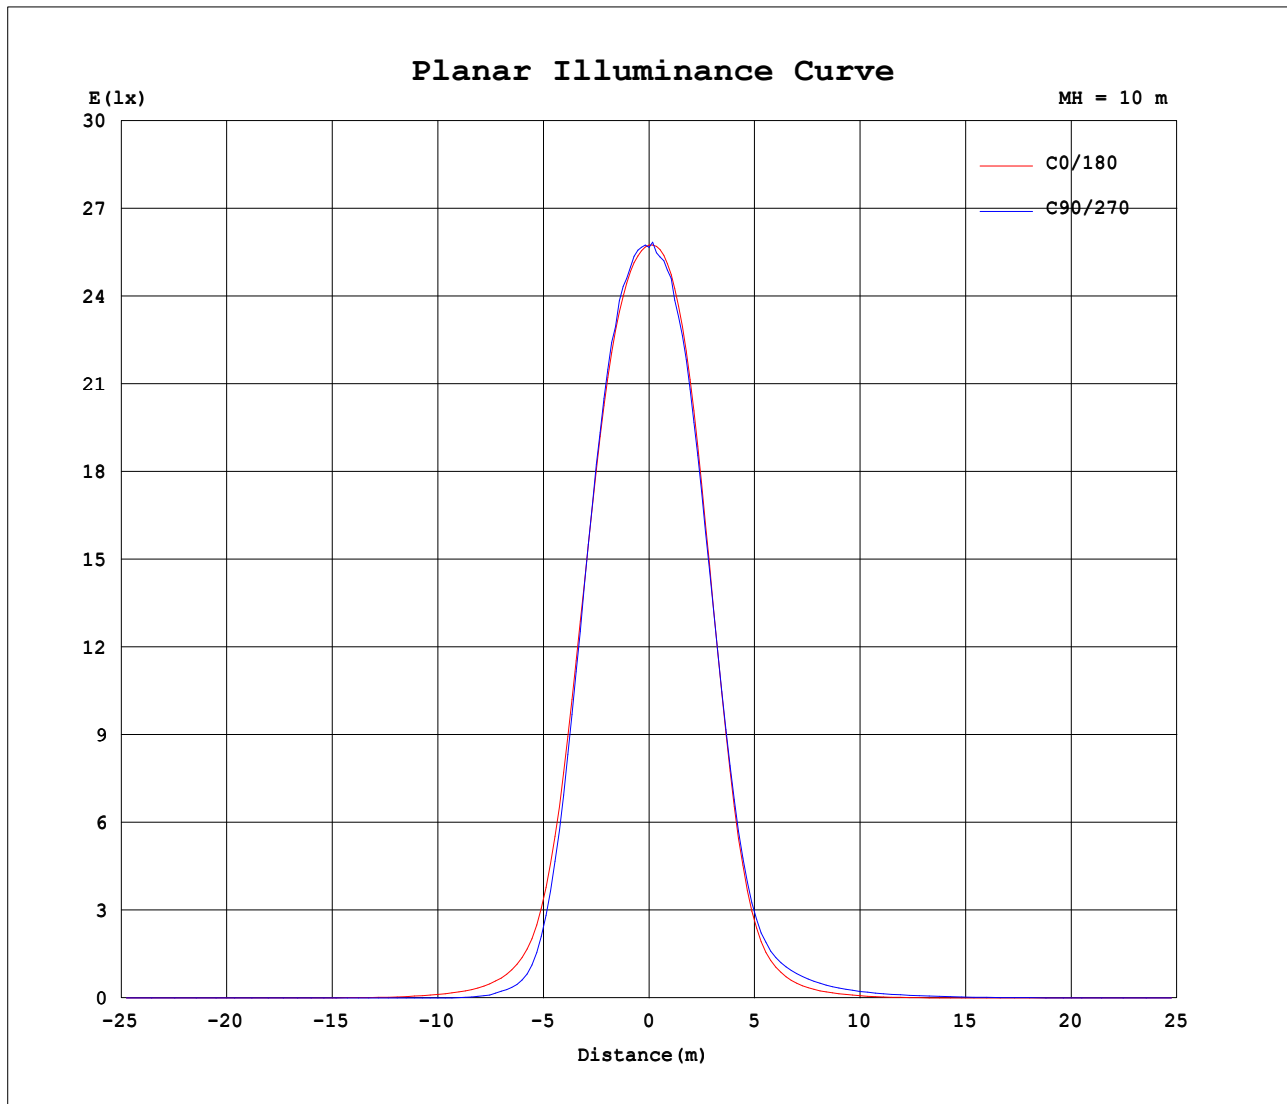


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-02-10

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.14V I:1.200A P:13.61W PF:0.9340 Freq:59.99Hz Lamp Flux:1101.4x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot Light	WEIGHT:
SPEC.:15W 2700K 40°LENS	DIM.:	SERIAL No.:2
MFR.: EVERFINE	SUR.:	Shielding Angle:Uplight Shroud

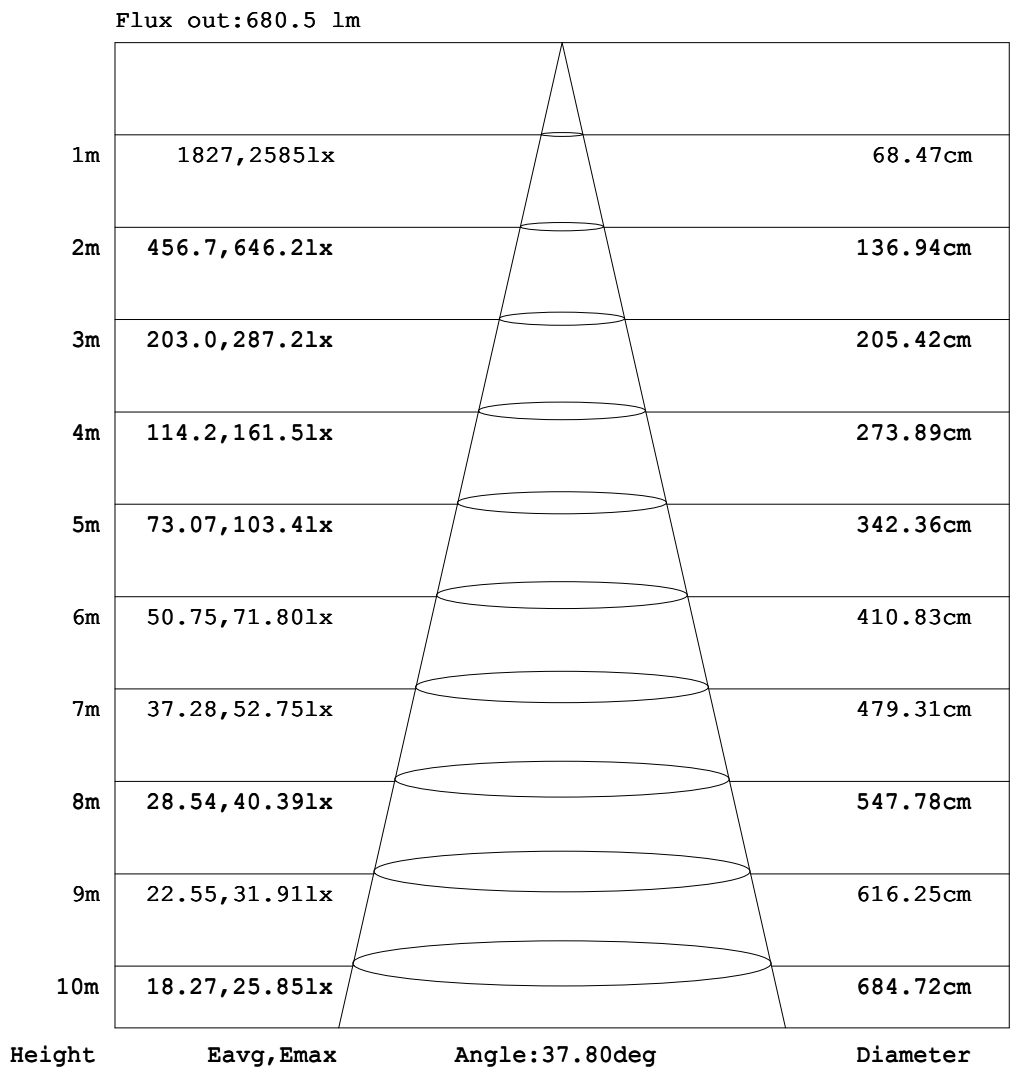

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-02-10

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.14V I:1.200A P:13.61W PF:0.9340 Freq:59.99Hz Lamp Flux:1101.4x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot Light	WEIGHT:
SPEC.:15W 2700K 40°LENS	DIM.:	SERIAL No.:2
MFR.: EVERFINE	SUR.:	Shielding Angle:Uplight Shroud

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.10	0.48	1.19	2.48	4.32	6.60	9.06	11.4	13.3	14.8	16.0	16.4
-170	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.13	0.50	1.22	2.48	4.25	6.45	8.87	11.2	13.3	14.7	15.7	16.3
-160	0.00	0.00	0.00	0.00	0.00	0.02	0.05	0.10	0.40	0.95	1.90	3.30	5.06	7.04	9.07	11.0	12.5	13.6	14.4
-150	0.00	0.00	0.00	0.00	0.00	0.02	0.05	0.10	0.23	0.57	1.12	1.97	3.09	4.40	5.78	7.12	8.26	9.13	9.66
-140	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.08	0.14	0.25	0.51	0.89	1.40	2.03	2.74	3.45	4.09	4.59	4.90
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.08	0.14	0.21	0.32	0.48	0.68	0.92	1.16	1.40	1.59	1.71
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.05	0.08	0.12	0.17	0.22	0.27	0.34	0.40	0.44	0.48
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.03	0.05	0.06	0.08	0.09	0.10
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.06	0.06	0.06	0.06	0.05	0.04	0.02	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.10	0.15	0.22	0.25	0.27	0.29	0.27	0.24	0.20	0.14	0.07	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.11	0.19	0.31	0.42	0.51	0.58	0.69	0.96	1.21	1.35	1.34	1.10	0.65	0.05
-40	0.00	0.00	0.00	0.00	0.10	0.22	0.39	0.58	0.75	1.18	2.15	3.66	5.59	7.56	9.90	11.6	12.3	11.7	9.26
-30	0.00	0.00	0.00	0.00	0.15	0.38	0.64	0.87	1.75	3.85	7.83	14.6	24.0	36.1	56.7	78.4	103	124	128
-20	0.00	0.00	0.00	0.02	0.23	0.52	0.82	1.51	3.93	9.51	20.8	38.0	69.3	126	255	513	821	1071	1168
-10	0.00	0.00	0.00	0.09	0.28	0.65	1.03	2.46	6.89	17.0	36.8	70.3	144	344	802	1414	1948	2248	2348
0	0.00	0.00	0.00	0.11	0.31	0.74	1.12	3.02	8.78	22.8	47.1	92.5	197	493	1093	1799	2317	2540	2575
10	0.00	0.01	0.02	0.13	0.40	0.96	1.83	4.30	10.5	23.5	47.8	86.8	167	362	798	1386	1898	2196	2287
20	0.00	0.02	0.05	0.11	0.42	1.02	2.07	4.39	9.65	19.7	38.0	64.6	106	175	302	534	811	1026	1106
30	0.00	0.02	0.06	0.12	0.37	0.92	1.90	3.68	7.41	13.9	24.3	40.3	61.4	88.1	121	160	198	231	247
40	0.00	0.03	0.08	0.15	0.34	0.67	1.38	2.60	4.72	8.35	13.9	21.6	31.3	42.8	56.7	70.0	82.3	92.9	99.7
50	0.00	0.03	0.08	0.15	0.25	0.49	0.81	1.50	2.53	4.13	6.51	9.84	14.1	19.1	24.4	29.8	34.8	39.0	42.0
60	0.00	0.04	0.08	0.15	0.24	0.34	0.51	0.74	1.10	1.71	2.46	3.45	4.70	6.16	7.80	9.50	11.1	12.5	13.5
70	0.00	0.04	0.08	0.14	0.21	0.29	0.39	0.49	0.61	0.74	0.94	1.12	1.30	1.54	1.87	2.19	2.49	2.74	2.93
80	0.00	0.04	0.08	0.12	0.17	0.23	0.29	0.35	0.42	0.50	0.58	0.66	0.74	0.83	0.92	1.00	1.08	1.16	1.23
90	0.00	0.04	0.07	0.11	0.15	0.18	0.22	0.26	0.29	0.33	0.37	0.40	0.44	0.48	0.51	0.55	0.59	0.62	0.66
100	0.00	0.03	0.07	0.10	0.12	0.14	0.17	0.18	0.20	0.21	0.22	0.22	0.24	0.25	0.26	0.27	0.28	0.29	0.31
110	0.00	0.03	0.06	0.08	0.09	0.10	0.10	0.09	0.09	0.07	0.07	0.06	0.04	0.03	0.01	0.01	0.00	0.00	0.00
120	0.00	0.03	0.05	0.06	0.06	0.05	0.04	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.02	0.04	0.04	0.04	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.06	0.07	0.06	0.04	0.01
140	0.00	0.02	0.03	0.03	0.02	0.00	0.00	0.00	0.00	0.00	0.08	0.19	0.35	0.65	0.99	1.35	1.64	1.82	1.84
150	0.00	0.01	0.02	0.02	0.01	0.00	0.00	0.00	0.03	0.19	0.45	0.99	1.77	2.73	3.72	4.68	5.43	5.92	6.05
160	0.00	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.18	0.53	1.26	2.40	3.88	5.59	7.31	8.85	10.0	10.7	10.8
170	0.00	0.00	0.01	0.00	0.00	0.00	0.00	0.06	0.36	0.96	2.09	3.72	5.78	8.03	10.2	12.0	13.3	14.0	14.2
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.10	0.48	1.19	2.48	4.32	6.60	9.06	11.4	13.3	14.8	16.0	16.4

H(β) Range:-90 - 90DEG
 H(β) Interval: 0.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:ADMIN
 Test Date:2023-02-10

V(B) Range:-180 - 180DEG
 V(B) Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
 Humidity:65.0%
 Test Distance:13.563m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.14V I:1.200A P:13.61W PF:0.9340 Freq:59.99Hz Lamp Flux:1101.4x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot Light	WEIGHT:
SPEC.:15W 2700K 40°LENS	DIM.:	SERIAL No.:2
MFR.: EVERFINE	SUR.:	Shielding Angle:Uplight Shroud

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	16.4	15.9	15.2	13.8	11.6	9.13	6.64	4.38	2.55	1.21	0.46	0.14	0.00	0.00	0.00	0.00	0.00	0.00	
-170	16.1	15.6	14.7	13.0	10.9	8.49	6.13	4.02	2.34	1.14	0.46	0.15	0.01	0.00	0.00	0.00	0.00	0.00	
-160	14.0	13.3	12.0	10.4	8.54	6.56	4.68	3.01	1.70	0.84	0.35	0.06	0.02	0.00	0.00	0.00	0.00	0.00	
-150	9.41	8.80	7.87	6.70	5.39	4.04	2.81	1.75	0.98	0.49	0.21	0.05	0.02	0.00	0.00	0.00	0.00	0.00	
-140	4.75	4.39	3.87	3.22	2.53	1.85	1.25	0.77	0.44	0.23	0.08	0.04	0.01	0.00	0.00	0.00	0.00	0.00	
-130	1.64	1.50	1.30	1.08	0.83	0.63	0.44	0.28	0.14	0.08	0.04	0.02	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.45	0.41	0.36	0.28	0.22	0.17	0.12	0.08	0.05	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.09	0.08	0.06	0.05	0.03	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.04	0.07	0.10	0.12	0.14	0.15	0.15	0.14	0.13	0.11	0.09	0.06	0.04	0.01	0.00	0.00	0.00	0.00	
-60	0.13	0.24	0.31	0.35	0.38	0.39	0.40	0.39	0.36	0.31	0.25	0.19	0.13	0.07	0.03	0.00	0.00	0.00	
-50	1.11	1.97	2.52	2.67	2.45	1.99	1.44	0.98	0.71	0.60	0.50	0.38	0.26	0.16	0.06	0.01	0.00	0.00	
-40	13.2	15.0	15.3	14.1	12.5	9.81	6.73	4.33	2.45	1.26	0.80	0.62	0.43	0.25	0.13	0.04	0.00	0.00	
-30	130	113	90.8	69.2	46.8	32.4	22.1	13.8	7.44	3.61	1.54	0.86	0.61	0.37	0.19	0.05	0.00	0.00	
-20	1093	865	567	298	155	89.8	51.3	30.6	16.8	7.76	3.15	1.21	0.78	0.48	0.24	0.07	0.00	0.00	
-10	2251	1974	1488	907	421	184	94.8	50.7	28.0	12.4	5.05	1.73	0.91	0.56	0.27	0.08	0.00	0.00	
0	2513	2310	1868	1230	618	258	125	65.0	35.1	15.2	6.19	2.05	0.99	0.61	0.29	0.09	0.00	0.00	
10	2198	1924	1460	902	438	206	111	61.6	34.5	16.0	6.89	2.53	1.22	0.68	0.32	0.10	0.01	0.00	
20	1049	855	587	345	203	127	77.9	47.7	27.0	13.5	6.03	2.46	1.28	0.66	0.33	0.11	0.02	0.00	
30	237	208	172	134	98.7	69.9	47.8	30.2	17.5	9.27	4.35	2.12	1.15	0.59	0.31	0.11	0.02	0.00	
40	94.4	85.0	73.6	60.9	47.7	35.5	24.6	16.1	9.62	5.23	2.81	1.60	0.88	0.50	0.28	0.11	0.03	0.00	
50	39.4	35.6	30.9	25.7	20.4	15.2	10.6	6.91	4.33	2.72	1.69	1.01	0.63	0.41	0.22	0.09	0.03	0.00	
60	12.5	11.2	9.60	7.92	6.26	4.80	3.58	2.61	1.85	1.26	0.88	0.66	0.47	0.30	0.18	0.08	0.04	0.00	
70	2.76	2.52	2.24	1.93	1.63	1.39	1.20	1.02	0.87	0.72	0.58	0.44	0.33	0.22	0.14	0.08	0.04	0.00	
80	1.17	1.09	1.01	0.93	0.85	0.76	0.68	0.59	0.51	0.43	0.35	0.29	0.23	0.17	0.12	0.08	0.04	0.00	
90	0.62	0.59	0.55	0.51	0.48	0.44	0.40	0.37	0.33	0.29	0.26	0.22	0.18	0.15	0.11	0.07	0.04	0.00	
100	0.29	0.28	0.27	0.26	0.25	0.24	0.22	0.22	0.21	0.20	0.18	0.17	0.14	0.12	0.10	0.07	0.03	0.00	
110	0.00	0.00	0.01	0.01	0.03	0.04	0.06	0.07	0.07	0.09	0.09	0.10	0.10	0.09	0.08	0.06	0.03	0.00	
120	0.01	0.02	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.04	0.05	0.06	0.06	0.05	0.03	0.00	
130	0.09	0.16	0.20	0.22	0.19	0.16	0.12	0.07	0.01	0.00	0.00	0.00	0.03	0.04	0.04	0.04	0.02	0.00	
140	1.98	1.94	1.77	1.48	1.14	0.79	0.54	0.35	0.19	0.09	0.00	0.00	0.00	0.02	0.03	0.03	0.02	0.00	
150	6.20	5.98	5.43	4.64	3.71	2.73	1.83	1.07	0.60	0.29	0.11	0.00	0.00	0.01	0.02	0.02	0.01	0.00	
160	11.1	10.8	9.94	8.66	7.09	5.39	3.78	2.37	1.29	0.63	0.25	0.02	0.00	0.00	0.01	0.01	0.01	0.00	
170	14.4	14.2	13.4	12.0	10.0	7.82	5.61	3.64	2.09	0.99	0.40	0.12	0.00	0.00	0.00	0.01	0.00	0.00	
180	16.4	15.9	15.2	13.8	11.6	9.13	6.64	4.38	2.55	1.21	0.46	0.14	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG

H(β) Interval: 0.5DEG

Test Speed: HIGH

Temperature:25.3DEG

Operators:ADMIN

Test Date:2023-02-10

V(B) Range:-180 - 180DEG

V(B) Interval: 0.5DEG

Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352

Humidity:65.0%

Test Distance:13.563m [K=1.0000]

Remarks: