

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		1587.3 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax At 50% of Imax At 90% of Imax	81.0V x 70.3H 44.8V x 44.9H 17.5V x 17.6H
Beam Flux	Total To 10% of Imax To 50% of Imax To 90% of Imax	1000.2 lumens per klm. 899.8 lumens per klm. 549.0 lumens per klm. 111.2 lumens per klm.
	Upward LOR Downward LOR	1.1 % 98.9 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 0.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:ADMIN  
Test Date:2021-03-29

V(B) Range:-180 - 180DEG  
V(B) Interval: 0.5DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.352  
Humidity:65.0%  
Test Distance:13.563m [K=1.0000]  
Remarks:

**LUMINAIRE PHOTOMETRIC TEST REPORT**

Test:U:12.05V I:0.4307A P:3.580W PF:0.6898 Freq:59.98Hz Lamp Flux:211.996x1 lm		
NAME: LED FLOOD LIGHT	TYPE:M4B1-3.5W-30K-40°+LAB-059	HEIGHT:
SPEC.:	DIM.:	SERIAL No.:2
MFR.: EVERFINE	SUR.:	Shielding Angle:

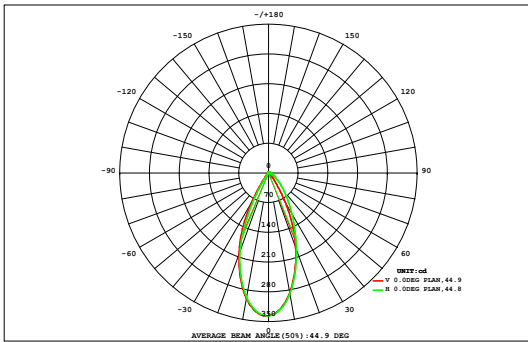

DATA OF LAMP		Eff:59.22lm/W	
M4B1-3.5W-30K-40°+LAB-059	Imax (cd)	336.5	
NOMINAL POWER (W)	3.5	AVAILABILITY (%)	88.5
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	187.7
NOMINAL FLUX (lm)	211.996	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	212.0
TEST VOLTAGE (V)	12	θ @50% (H, V)	45,45DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM															UNIT:lm		Φ t	Φ a	
	0.00	0.01	0.01	0.03	0.04	0.06	0.09	0.11	0.13	0.13	0.11	0.09	0.07	0.05	0.03	0.01	0.01			0.00
72	0.00	0.01	0.01	0.03	0.04	0.06	0.09	0.11	0.13	0.13	0.11	0.09	0.07	0.05	0.03	0.01	0.01	0.00	0.99	0.00
64	0.00	0.01	0.02	0.05	0.08	0.12	0.17	0.22	0.26	0.26	0.22	0.17	0.12	0.08	0.05	0.03	0.01	0.00	1.88	0.00
56	0.00	0.01	0.03	0.07	0.12	0.20	0.29	0.39	0.48	0.48	0.40	0.30	0.21	0.13	0.07	0.04	0.02	0.01	3.27	0.00
48	0.01	0.02	0.05	0.10	0.18	0.31	0.48	0.67	0.83	0.84	0.68	0.49	0.32	0.19	0.10	0.05	0.02	0.01	5.34	2.54
40	0.01	0.02	0.06	0.12	0.24	0.46	0.76	1.11	1.40	1.40	1.13	0.79	0.48	0.27	0.13	0.06	0.02	0.01	8.47	6.61
32	0.01	0.02	0.06	0.14	0.32	0.67	1.25	1.91	2.34	2.33	1.90	1.27	0.71	0.35	0.16	0.07	0.03	0.01	13.5	12.1
24	0.01	0.02	0.06	0.15	0.40	1.01	2.10	3.12	3.68	3.64	3.02	2.04	1.04	0.44	0.18	0.07	0.03	0.01	21.0	19.8
	0.01	0.02	0.05	0.14	0.47	1.48	3.02	4.35	5.16	5.09	4.19	2.84	1.44	0.52	0.18	0.07	0.02	0.01	29.1	28.1
	0.00	0.01	0.03	0.11	0.49	1.80	3.60	5.20	6.19	6.10	4.97	3.34	1.70	0.55	0.16	0.05	0.02	0.01	34.3	33.5
	0.00	0.01	0.02	0.09	0.44	1.75	3.60	5.24	6.24	6.15	5.00	3.35	1.64	0.49	0.13	0.04	0.02	0.01	34.2	33.4
	0.00	0.01	0.02	0.06	0.31	1.27	2.95	4.42	5.29	5.23	4.26	2.78	1.24	0.36	0.10	0.03	0.01	0.01	28.4	27.5
-24	0.00	0.01	0.02	0.04	0.17	0.64	1.76	2.99	3.69	3.65	2.89	1.69	0.67	0.21	0.07	0.03	0.01	0.00	18.5	17.6
-32	0.00	0.01	0.01	0.02	0.07	0.23	0.62	1.21	1.63	1.62	1.20	0.64	0.26	0.10	0.04	0.02	0.01	0.00	7.68	6.31
-40	0.00	0.00	0.01	0.01	0.03	0.06	0.14	0.26	0.33	0.34	0.27	0.17	0.09	0.05	0.02	0.01	0.01	0.00	1.81	0.09
-48	0.00	0.00	0.01	0.01	0.01	0.02	0.03	0.04	0.04	0.04	0.05	0.04	0.03	0.02	0.02	0.01	0.01	0.00	0.37	0.00
-56	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.12	0.00
-64	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.06	0.00
-72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)	16	24	32	40	48	56	64	72			
Φ t	0.05	0.19	0.47	1.15	3.37	10.1	20.9	31.2	37.7	37.3	30.3	20.0	10.0	3.83	1.47	0.60	0.24	0.08	209	---
Φ a	0.00	0.00	0.00	0.00	0.82	8.28	19.4	29.9	36.4	36.1	28.9	18.5	8.23	1.13	0.00	0.00	0.00	0.00	---	188


one-half-peak spread: U:21.9,D:23.3 , L:22.3,R:22.9 NEMA Beam Type: Type 5

H(β) Range:-90 - 90DEG  
H(β) Interval: 0.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:ADMIN  
Test Date:2021-03-29

V(B) Range:-180 - 180DEG  
V(B) Interval: 0.5DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.352  
Humidity:65.0%  
Test Distance:13.563m [K=1.0000]  
Remarks:

**ISOCANDELA DIAGRAM**

Test:U:12.05V I:0.4307A P:3.580W PF:0.6898 Freq:59.98Hz Lamp Flux:211.996x1 lm		
NAME: LED FLOOD LIGHT	TYPE:M4B1-3.5W-30K-40°+LAB-05	HEIGHT:
SPEC.:	DIM.:	SERIAL No.:2
MFR.: EVERFINE	SUR.:	Shielding Angle:

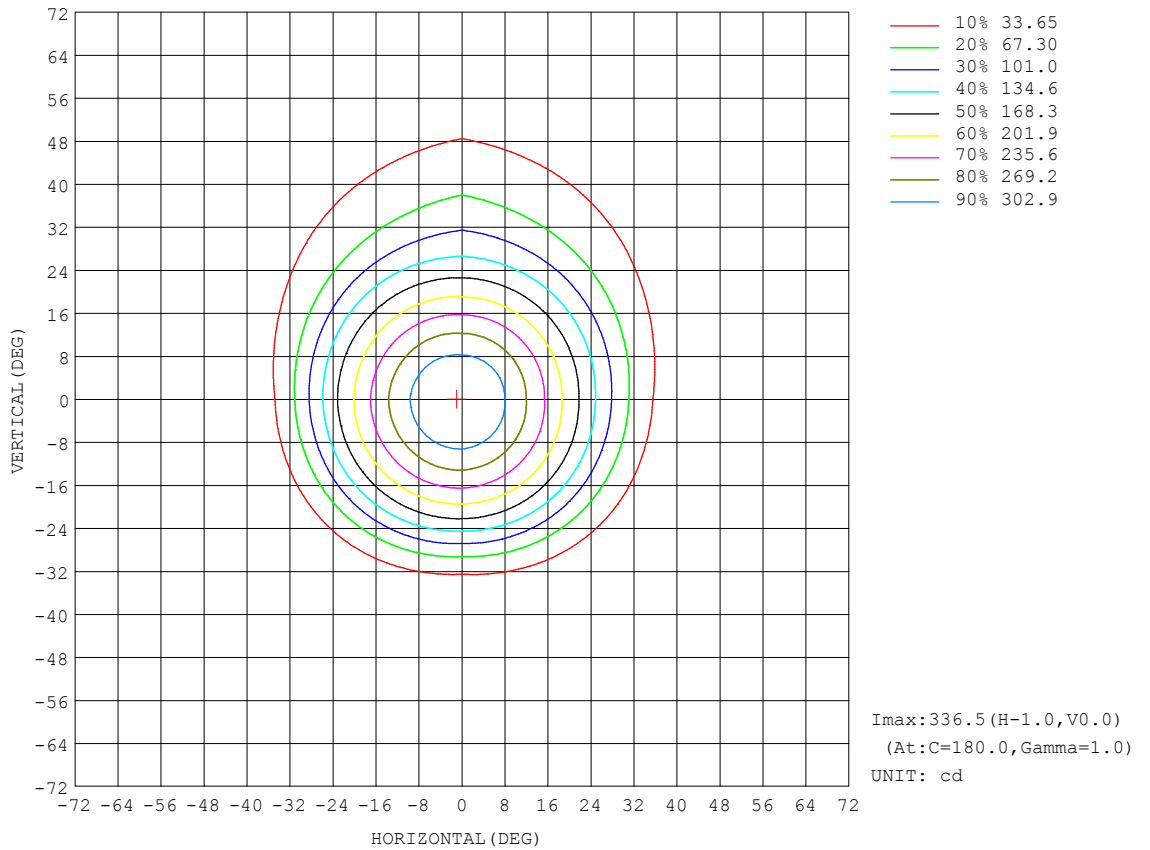


H(β) Range:-90 - 90DEG  
 H(β) Interval: 0.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:ADMIN  
 Test Date:2021-03-29

V(B) Range:-180 - 180DEG  
 V(B) Interval: 0.5DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.352  
 Humidity:65.0%  
 Test Distance:13.563m [K=1.0000]  
 Remarks:

**ISOLUX DIAGRAM**


Test:U:12.05V I:0.4307A P:3.580W PF:0.6898 Freq:59.98Hz Lamp Flux:211.996x1 lm		
NAME: LED FLOOD LIGHT	TYPE:M4B1-3.5W-30K-40°+LAB-05	HEIGHT:
SPEC.:	DIM.:	SERIAL No.:2
MFR.: EVERFINE	SUR.:	Shielding Angle:

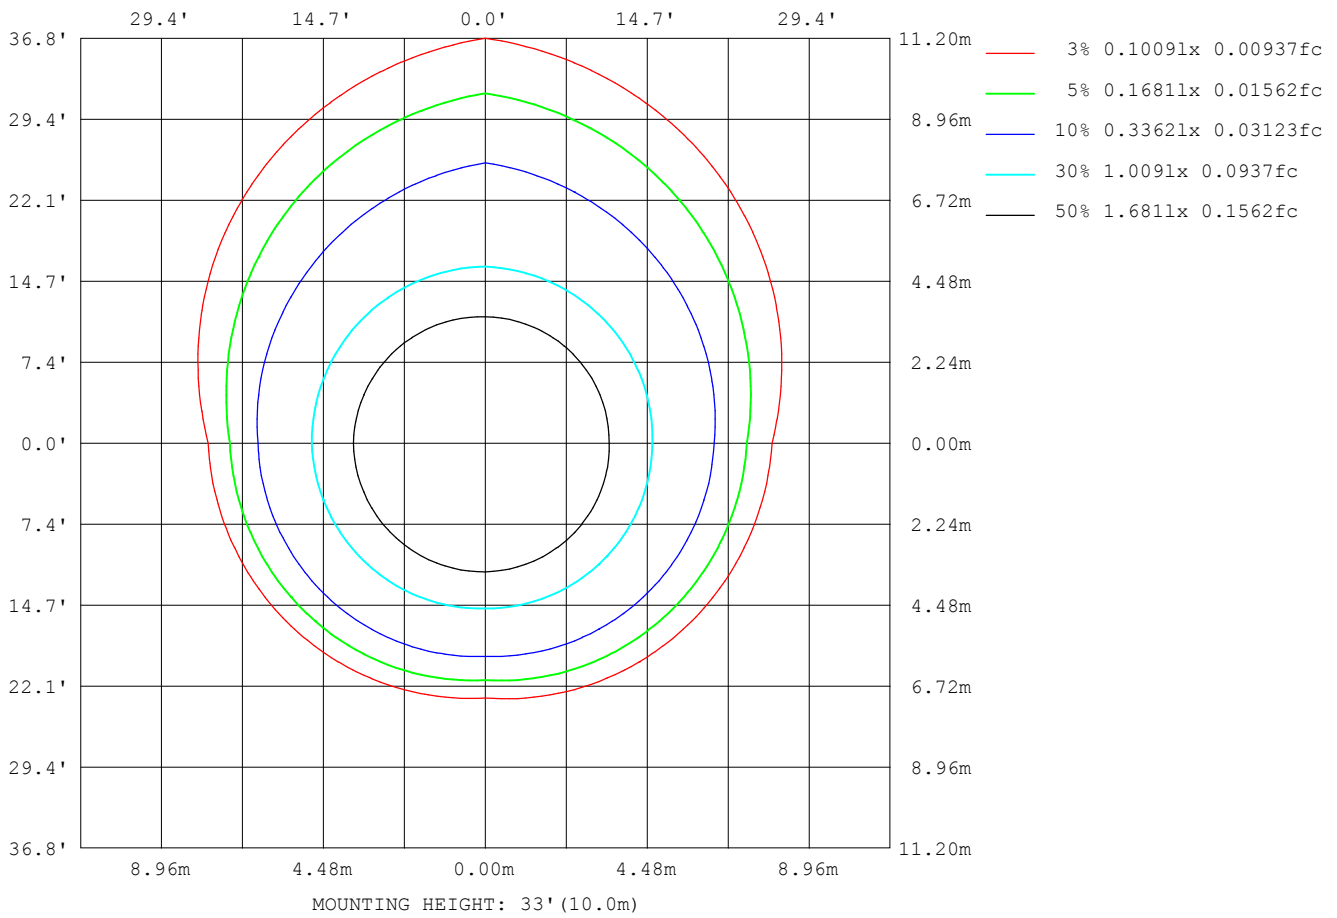

**H(β) Range:-90 - 90DEG**  
**H(β) Interval: 0.5DEG**  
**Test Speed: HIGH**  
**Temperature:25.3DEG**  
**Operators:ADMIN**  
**Test Date:2021-03-29**

**V(B) Range:-180 - 180DEG**  
**V(B) Interval: 0.5DEG**  
**Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.352**  
**Humidity:65.0%**  
**Test Distance:13.563m [K=1.0000]**  
**Remarks:**

**Planar Illuminance Curve**

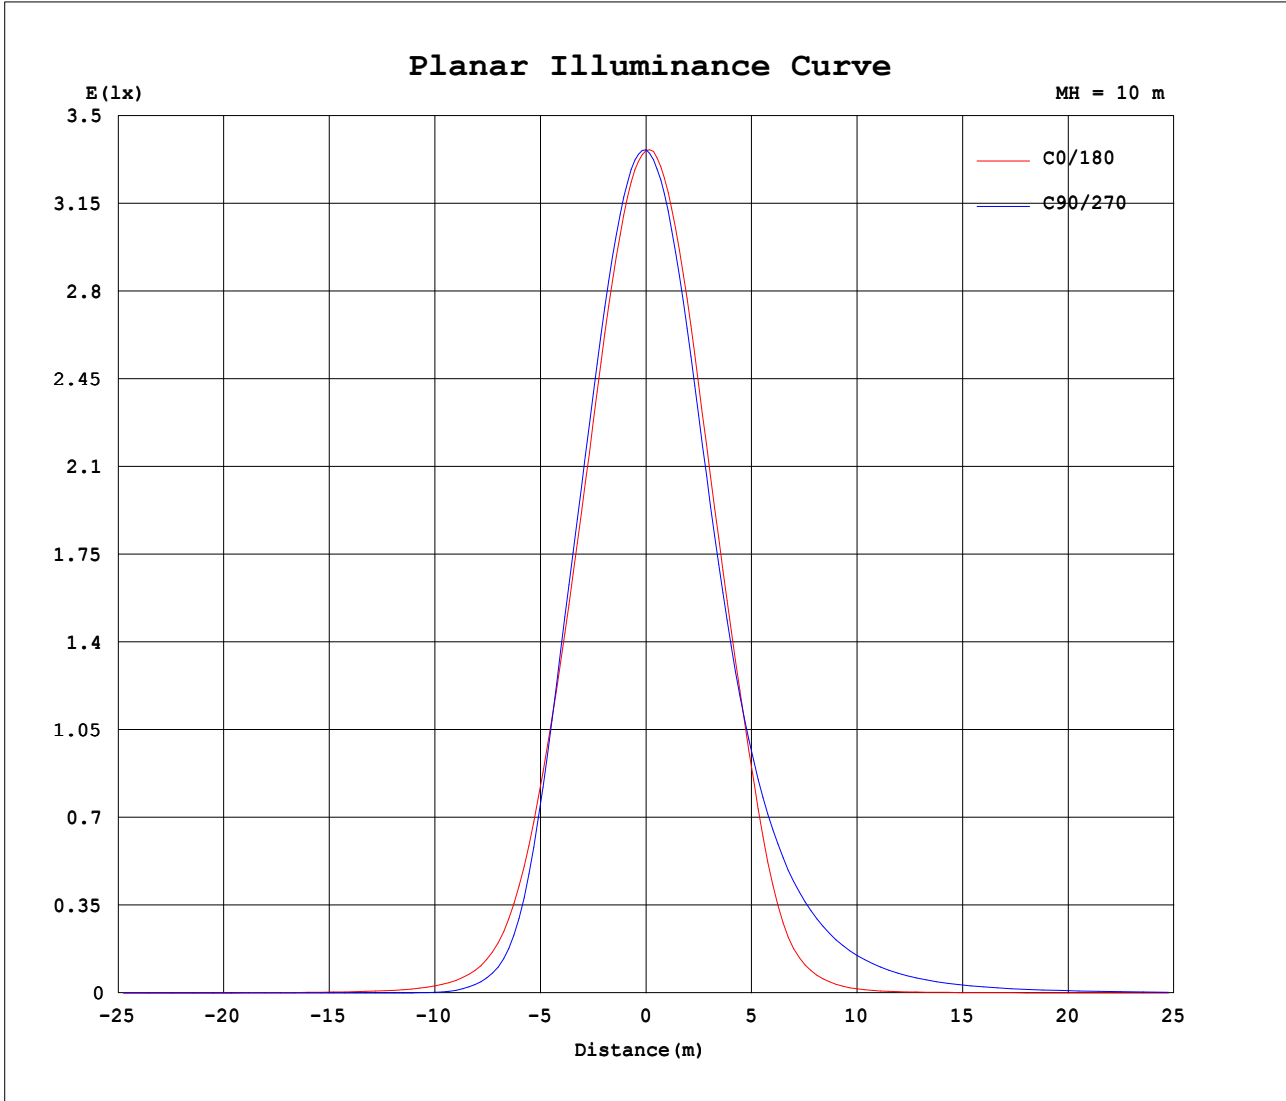


H( $\beta$ ) Range:-90 - 90DEG  
H( $\beta$ ) Interval: 0.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:ADMIN  
Test Date:2021-03-29

V(B) Range:-180 - 180DEG  
V(B) Interval: 0.5DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.352  
Humidity:65.0%  
Test Distance:13.563m [K=1.0000]  
Remarks:

**AAI Figure**

Test:U:12.05V I:0.4307A P:3.580W PF:0.6898 Freq:59.98Hz Lamp Flux:211.996x1 lm		
NAME: LED FLOOD LIGHT	TYPE:M4B1-3.5W-30K-40°+LAB-05	HEIGHT:
SPEC.:	DIM.:	SERIAL No.:2
MFR.: EVERFINE	SUR.:	Shielding Angle:

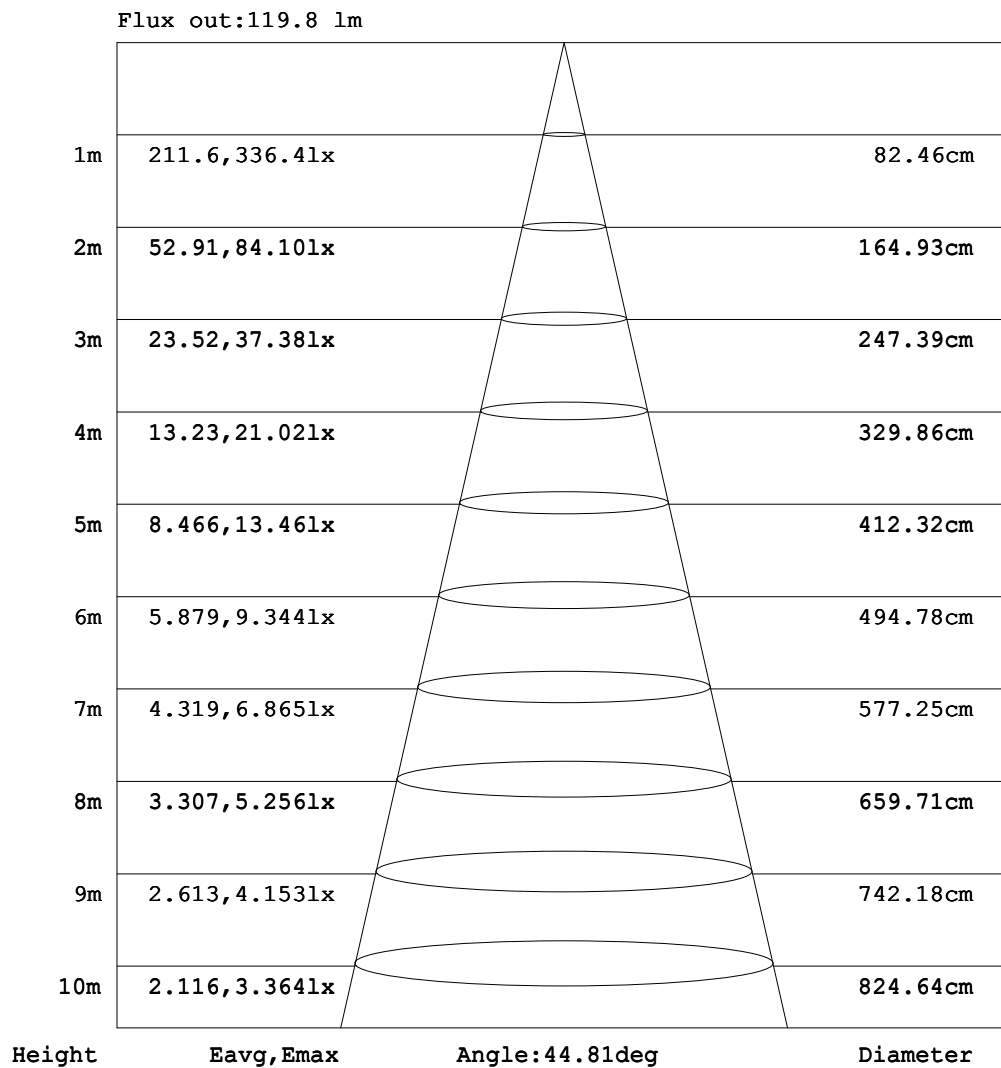

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG  
H(β) Interval: 0.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:ADMIN  
Test Date:2021-03-29

V(B) Range:-180 - 180DEG  
V(B) Interval: 0.5DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.352  
Humidity:65.0%  
Test Distance:13.563m [K=1.0000]  
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.05V I:0.4307A P:3.580W PF:0.6898 Freq:59.98Hz Lamp Flux:211.996x1 lm		
NAME: LED FLOOD LIGHT	TYPE:M4B1-3.5W-30K-40°+LAB-05	HEIGHT:
SPEC.:	DIM.:	SERIAL No.:2
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.12	0.34	0.59	0.92	1.23	1.54	1.84	2.11	2.35	2.48
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.04	0.16	0.36	0.64	0.95	1.28	1.60	1.89	2.16	2.37	2.52
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.07	0.12	0.31	0.55	0.81	1.10	1.38	1.65	1.87	2.06	2.20
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.06	0.11	0.19	0.36	0.56	0.78	1.00	1.20	1.38	1.53	1.64
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.08	0.13	0.21	0.30	0.44	0.57	0.71	0.83	0.93	1.01
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.06	0.10	0.15	0.20	0.26	0.32	0.39	0.44	0.49
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.06	0.08	0.10	0.12	0.13
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.03	0.04	0.03	0.03	0.01	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.09	0.16	0.22	0.25	0.26	0.24	0.22	0.18	0.13	0.07	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.11	0.25	0.37	0.45	0.52	0.56	0.57	0.55	0.53	0.51	0.43	0.20
-40	0.00	0.00	0.00	0.00	0.00	0.13	0.34	0.53	0.68	0.82	0.94	1.11	1.40	1.92	2.84	3.99	5.02	5.65	5.43
-30	0.00	0.00	0.00	0.00	0.04	0.30	0.56	0.80	1.03	1.32	1.85	3.38	6.92	12.9	21.9	34.1	47.2	56.6	58.4
-20	0.00	0.00	0.00	0.00	0.14	0.46	0.76	1.08	1.44	2.18	4.76	11.4	25.0	53.5	96.2	138	171	191	196
-10	0.00	0.00	0.00	0.00	0.22	0.57	0.93	1.33	1.89	3.65	9.65	23.8	59.3	118	175	223	263	289	297
0	0.00	0.00	0.00	0.00	0.26	0.62	1.03	1.50	2.21	4.75	12.7	32.2	80.5	146	203	256	300	329	336
10	0.00	0.01	0.03	0.10	0.44	1.03	1.79	2.86	4.51	7.97	16.3	33.2	70.1	125	176	221	258	283	289
20	0.00	0.01	0.06	0.18	0.54	1.27	2.25	3.68	5.79	9.22	15.7	27.1	45.9	77.0	115	149	173	188	192
30	0.00	0.02	0.08	0.23	0.55	1.28	2.31	3.76	5.85	8.86	13.3	20.0	29.9	42.8	58.6	76.3	92.5	104	110
40	0.00	0.02	0.09	0.24	0.51	1.10	2.01	3.25	4.94	7.22	10.2	14.2	19.2	25.4	32.6	40.2	47.7	54.2	59.1
50	0.00	0.02	0.08	0.21	0.45	0.82	1.47	2.39	3.56	5.03	6.89	9.14	11.8	14.8	18.1	21.5	24.8	27.8	30.1
60	0.00	0.01	0.06	0.16	0.34	0.59	0.95	1.45	2.15	2.99	3.98	5.12	6.38	7.73	9.15	10.6	11.9	13.1	14.1
70	0.00	0.01	0.04	0.10	0.21	0.35	0.55	0.80	1.10	1.46	1.88	2.35	2.87	3.42	3.97	4.51	5.01	5.45	5.82
80	0.00	0.01	0.02	0.05	0.09	0.14	0.21	0.30	0.40	0.52	0.65	0.79	0.94	1.10	1.25	1.40	1.54	1.66	1.77
90	0.00	0.01	0.02	0.03	0.03	0.04	0.05	0.06	0.07	0.08	0.09	0.09	0.10	0.11	0.12	0.13	0.14	0.14	0.15
100	0.00	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.05	0.08	0.14	0.15	0.14
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.18	0.32	0.46	0.60	0.68	0.74	0.75
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.12	0.30	0.51	0.74	0.97	1.17	1.32	1.39	1.41
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.08	0.26	0.51	0.79	1.09	1.37	1.61	1.81	1.95	1.96
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.12	0.34	0.59	0.92	1.23	1.54	1.84	2.11	2.35	2.45

H(β) Range:-90 - 90DEG  
H(β) Interval: 0.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:ADMIN  
Test Date:2021-03-29

V(B) Range:-180 - 180DEG  
V(B) Interval: 0.5DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.352  
Humidity:65.0%  
Test Distance:13.563m [K=1.0000]  
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.05V I:0.4307A P:3.580W PF:0.6898 Freq:59.98Hz Lamp Flux:211.996x1 lm		
NAME: LED FLOOD LIGHT	TYPE:M4B1-3.5W-30K-40°+LAB-05	HEIGHT:
SPEC.:	DIM.:	SERIAL No.:2
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	2.46	2.35	2.18	1.97	1.69	1.38	1.03	0.71	0.39	0.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-170	2.44	2.32	2.14	1.91	1.65	1.34	0.99	0.65	0.37	0.15	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00
-160	2.13	2.01	1.85	1.63	1.38	1.09	0.81	0.52	0.28	0.08	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00
-150	1.58	1.48	1.35	1.17	0.96	0.75	0.53	0.33	0.14	0.06	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00
-140	0.96	0.89	0.80	0.66	0.53	0.39	0.26	0.13	0.08	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-130	0.45	0.41	0.34	0.27	0.20	0.15	0.10	0.06	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-120	0.12	0.10	0.08	0.06	0.04	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.03	0.07	0.09	0.11	0.13	0.13	0.13	0.12	0.09	0.07	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.10	0.20	0.28	0.34	0.39	0.41	0.41	0.39	0.35	0.29	0.22	0.15	0.07	0.00	0.00	0.00	0.00	0.00
-50	0.48	0.70	0.86	0.92	0.92	0.92	0.88	0.81	0.72	0.61	0.50	0.35	0.22	0.09	0.00	0.00	0.00	0.00
-40	5.98	5.66	4.90	4.00	3.22	2.59	2.03	1.59	1.30	1.05	0.84	0.62	0.40	0.21	0.06	0.00	0.00	0.00
-30	56.4	47.3	35.0	23.6	14.8	8.93	5.47	3.53	2.36	1.67	1.23	0.90	0.61	0.33	0.11	0.00	0.00	0.00
-20	188	166	132	92.3	53.9	27.9	14.1	7.44	4.22	2.56	1.71	1.18	0.79	0.44	0.18	0.00	0.00	0.00
-10	285	255	213	164	110	59.6	27.5	12.9	6.57	3.56	2.17	1.43	0.93	0.53	0.22	0.00	0.00	0.00
0	321	287	239	187	133	77.7	36.5	16.6	8.18	4.26	2.49	1.59	1.02	0.58	0.24	0.00	0.00	0.00
10	278	250	210	165	117	70.3	36.9	19.6	10.9	6.18	3.71	2.29	1.39	0.76	0.32	0.03	0.01	0.00
20	186	169	143	111	77.3	48.8	29.9	18.3	11.3	6.91	4.30	2.66	1.59	0.85	0.35	0.06	0.01	0.00
30	104	92.6	77.3	60.4	44.7	31.9	22.1	14.9	9.90	6.48	4.19	2.65	1.58	0.83	0.34	0.08	0.02	0.00
40	54.5	48.3	41.2	33.7	26.7	20.4	15.1	10.9	7.70	5.30	3.56	2.29	1.37	0.73	0.30	0.09	0.02	0.00
50	27.9	25.1	21.9	18.5	15.2	12.1	9.47	7.18	5.30	3.80	2.63	1.72	1.04	0.54	0.21	0.08	0.02	0.00
60	13.1	12.0	10.7	9.27	7.88	6.53	5.28	4.15	3.19	2.35	1.66	1.10	0.67	0.34	0.16	0.06	0.01	0.00
70	5.47	5.05	4.57	4.05	3.51	2.99	2.47	1.99	1.56	1.17	0.84	0.55	0.35	0.21	0.10	0.04	0.01	0.00
80	1.66	1.54	1.40	1.25	1.10	0.94	0.79	0.65	0.52	0.40	0.30	0.21	0.14	0.09	0.05	0.02	0.01	0.00
90	0.14	0.14	0.13	0.12	0.11	0.10	0.09	0.09	0.08	0.07	0.06	0.05	0.04	0.03	0.03	0.02	0.01	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.01	0.02	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.18	0.20	0.16	0.14	0.13	0.10	0.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.79	0.79	0.74	0.63	0.50	0.37	0.24	0.14	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160	1.46	1.45	1.36	1.21	1.02	0.79	0.56	0.33	0.17	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
170	2.03	1.98	1.86	1.68	1.45	1.17	0.85	0.55	0.29	0.11	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
180	2.46	2.35	2.18	1.97	1.69	1.38	1.03	0.71	0.39	0.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG  
H(β) Interval: 0.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:ADMIN  
Test Date:2021-03-29

V(B) Range:-180 - 180DEG  
V(B) Interval: 0.5DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.352  
Humidity:65.0%  
Test Distance:13.563m [K=1.0000]  
Remarks: