

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	353.2 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	164.9V x 170.6H
	At 50% of Imax	109.8V x 114.6H
	At 90% of Imax	32.1V x 41.0H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	981.6 lumens per klm.
	To 50% of Imax	679.1 lumens per klm.
	To 90% of Imax	85.5 lumens per klm.

Upward LOR	0.9 %
Downward LOR	99.1 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-10-16

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.16V I:0.9271A P:7.905W PF:0.7011 Freq:59.97Hz Lamp Flux:374.505x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Path Light	WEIGHT:
SPEC.:8W 3000K Max beam angle	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-041

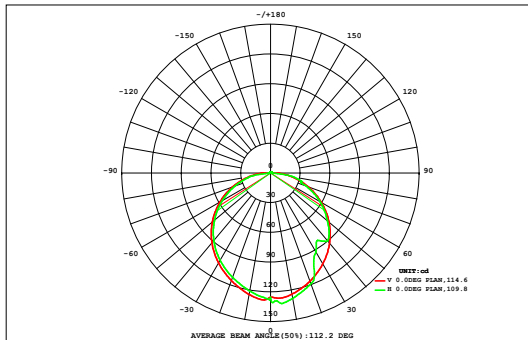

DATA OF LAMP		Eff:47.38lm/W	
MODEL	A6B1-8W-30K-A	Imax (cd)	132.3
NOMINAL POWER (W)	8	AVAILABILITY (%)	97.9
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	366.8
NOMINAL FLUX (lm)	374.505	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	374.5
TEST VOLTAGE (V)	12	θ @50% (H,V)	115,110DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.01	0.05	0.08	0.12	0.15	0.19	0.22	0.24	0.24	0.24	0.23	0.21	0.18	0.14	0.11	0.07	0.04	0.01	2.53	1.10
90	0.01	0.05	0.08	0.12	0.15	0.19	0.22	0.24	0.24	0.24	0.23	0.21	0.18	0.14	0.11	0.07	0.04	0.01	2.53	1.10
80	0.02	0.08	0.18	0.33	0.50	0.67	0.79	0.88	0.93	0.93	0.88	0.79	0.66	0.50	0.33	0.18	0.08	0.02	8.75	8.38
70	0.03	0.12	0.30	0.52	0.75	0.98	1.20	1.36	1.44	1.44	1.36	1.19	0.98	0.74	0.51	0.29	0.12	0.02	13.3	13.2
60	0.03	0.16	0.38	0.67	1.01	1.36	1.67	1.89	2.01	2.01	1.89	1.67	1.36	1.01	0.66	0.38	0.15	0.03	18.3	18.3
50	0.03	0.19	0.46	0.83	1.26	1.69	2.08	2.36	2.51	2.51	2.37	2.08	1.70	1.26	0.82	0.45	0.18	0.03	22.8	22.8
40	0.04	0.21	0.53	0.97	1.47	1.98	2.41	2.61	2.65	2.66	2.62	2.42	1.99	1.47	0.97	0.52	0.21	0.04	25.8	25.7
30	0.04	0.23	0.58	1.07	1.64	2.20	2.56	2.89	3.16	3.16	2.89	2.57	2.21	1.64	1.07	0.58	0.23	0.04	28.8	28.7
20	0.04	0.24	0.62	1.15	1.75	2.32	2.82	3.37	3.70	3.70	3.38	2.83	2.33	1.76	1.15	0.62	0.24	0.04	32.1	32.1
10	0.04	0.25	0.65	1.19	1.81	2.43	3.01	3.53	3.87	3.86	3.53	3.03	2.44	1.82	1.19	0.64	0.25	0.04	33.6	33.6
0	0.04	0.25	0.64	1.19	1.81	2.45	3.02	3.48	3.77	3.76	3.49	3.04	2.46	1.82	1.19	0.64	0.25	0.04	33.3	33.3
-10	0.04	0.24	0.62	1.15	1.75	2.36	2.90	3.31	3.53	3.53	3.32	2.91	2.37	1.76	1.15	0.62	0.24	0.04	31.8	31.8
-20	0.04	0.23	0.58	1.07	1.63	2.19	2.69	3.06	3.24	3.24	3.06	2.70	2.20	1.64	1.07	0.58	0.23	0.04	29.5	29.5
-30	0.04	0.21	0.53	0.96	1.46	1.96	2.41	2.73	2.89	2.90	2.74	2.41	1.97	1.47	0.96	0.52	0.20	0.04	26.4	26.4
-40	0.03	0.18	0.45	0.82	1.25	1.68	2.05	2.33	2.47	2.47	2.33	2.06	1.68	1.25	0.82	0.45	0.18	0.03	22.6	22.5
-50	0.03	0.15	0.37	0.67	1.01	1.35	1.65	1.86	1.97	1.97	1.86	1.65	1.35	1.00	0.66	0.37	0.15	0.03	18.1	18.0
-60	0.03	0.12	0.28	0.50	0.74	0.98	1.20	1.35	1.43	1.43	1.35	1.19	0.98	0.73	0.49	0.28	0.11	0.02	13.2	13.1
-70	0.02	0.08	0.17	0.31	0.46	0.61	0.74	0.83	0.87	0.87	0.83	0.73	0.61	0.45	0.30	0.16	0.08	0.02	8.14	7.68
-80	0.01	0.05	0.08	0.11	0.14	0.16	0.18	0.18	0.17	0.17	0.18	0.17	0.15	0.13	0.10	0.07	0.04	0.01	2.12	0.58
-90	0.01	0.05	0.08	0.11	0.14	0.16	0.18	0.18	0.17	0.17	0.18	0.17	0.15	0.13	0.10	0.07	0.04	0.01	2.12	0.58
-90 -80 -70 -60 -50 -40 -30 -20 HORIZONTAL (DEG) 20 30 40 50 60 70 80 90																				
Φ t	0.57	3.05	7.52	13.6	20.6	27.6	33.6	38.3	40.9	40.9	38.3	33.7	27.6	20.6	13.6	7.43	2.96	0.53	371	---
Φ a	0.30	2.73	7.21	13.3	20.3	27.3	33.4	38.1	40.7	40.7	38.2	33.5	27.4	20.3	13.3	7.13	2.65	0.27	---	367

one-half-peak spread: U:56.0,D:15.6 , L:54.6,R:52.7


NEMA Beam Type: Type 7

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-10-16

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.16V I:0.9271A P:7.905W PF:0.7011 Freq:59.97Hz Lamp Flux:374.505x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Path Light	WEIGHT:
SPEC.:8W 3000K Max beam angle	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-041

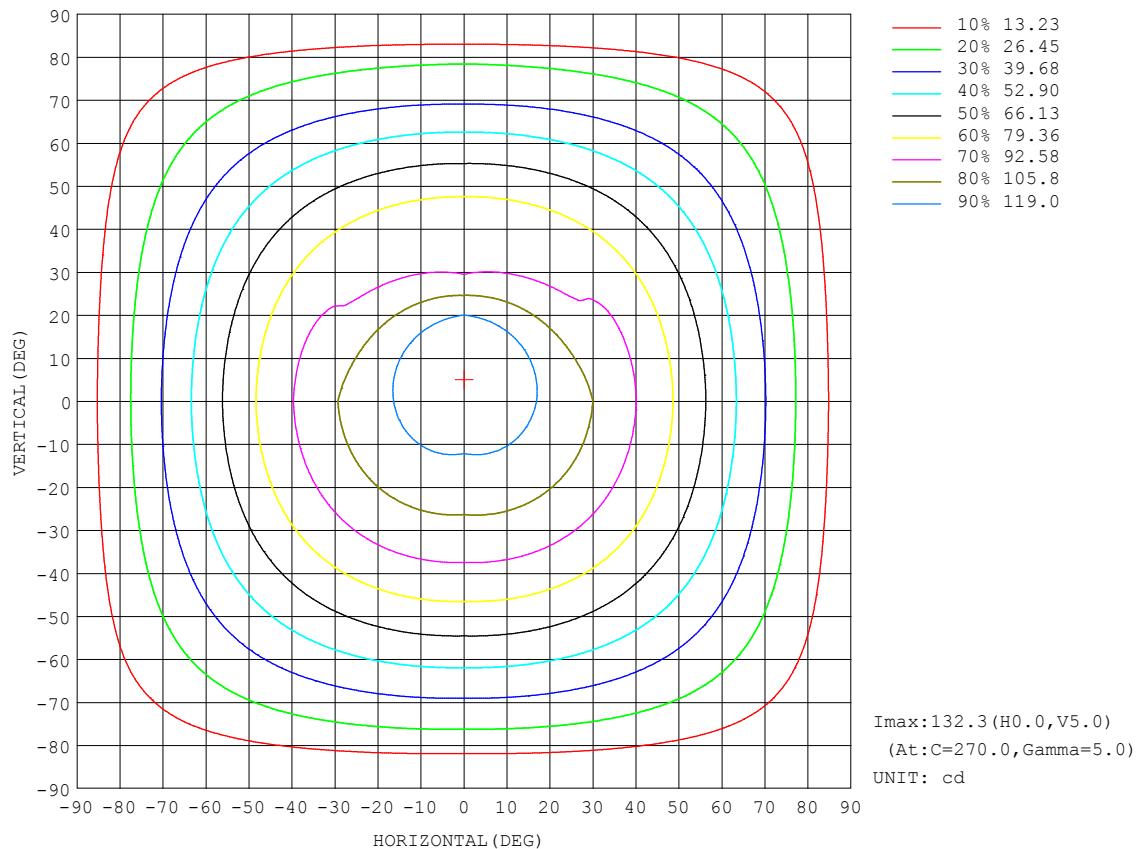


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-10-16

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.16V I:0.9271A P:7.905W PF:0.7011 Freq:59.97Hz Lamp Flux:374.505x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Path Light	WEIGHT:
SPEC.:8W 3000K Max beam angle	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-041

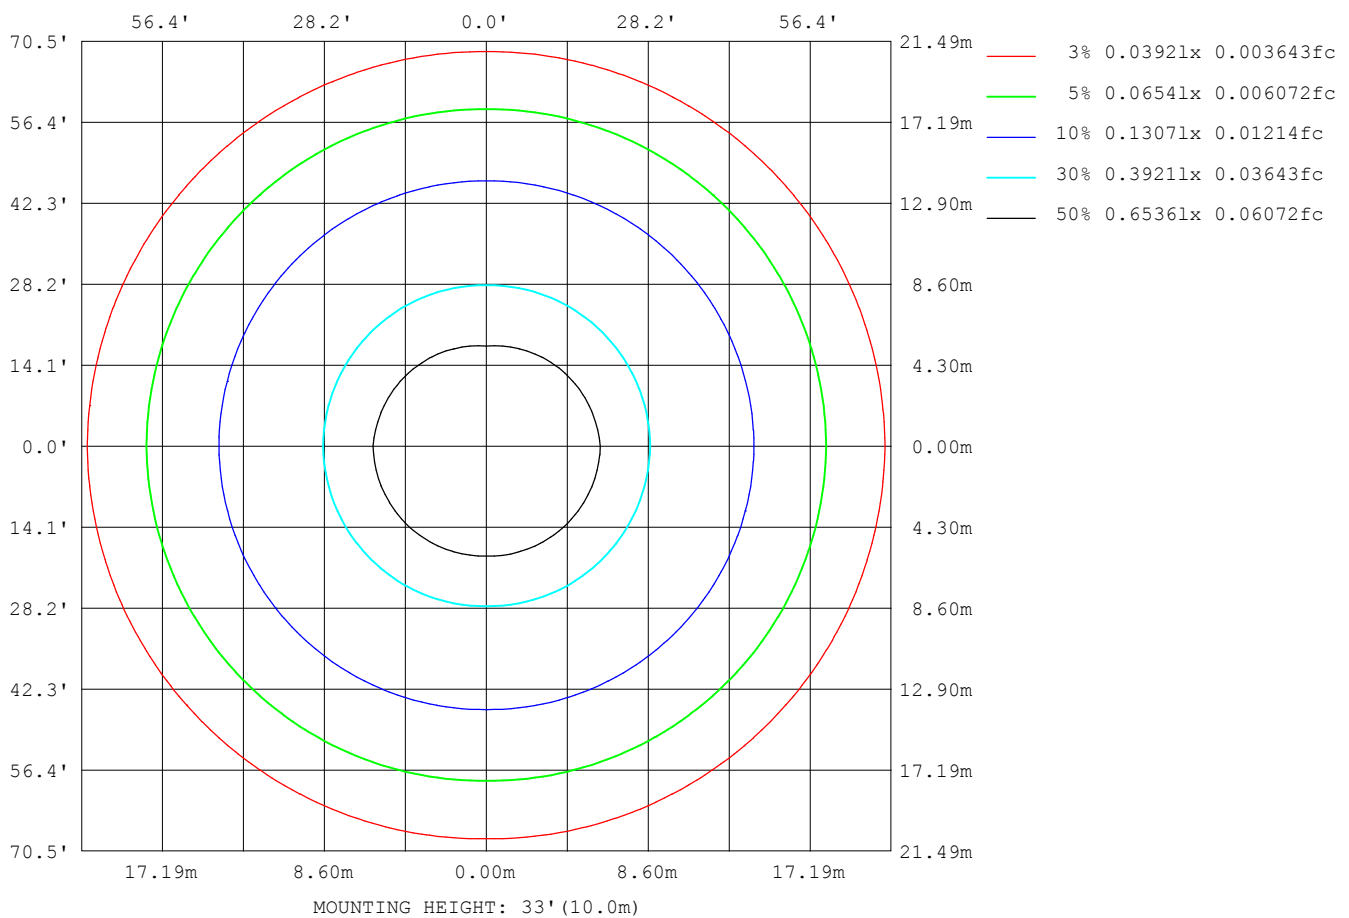

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-10-16

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

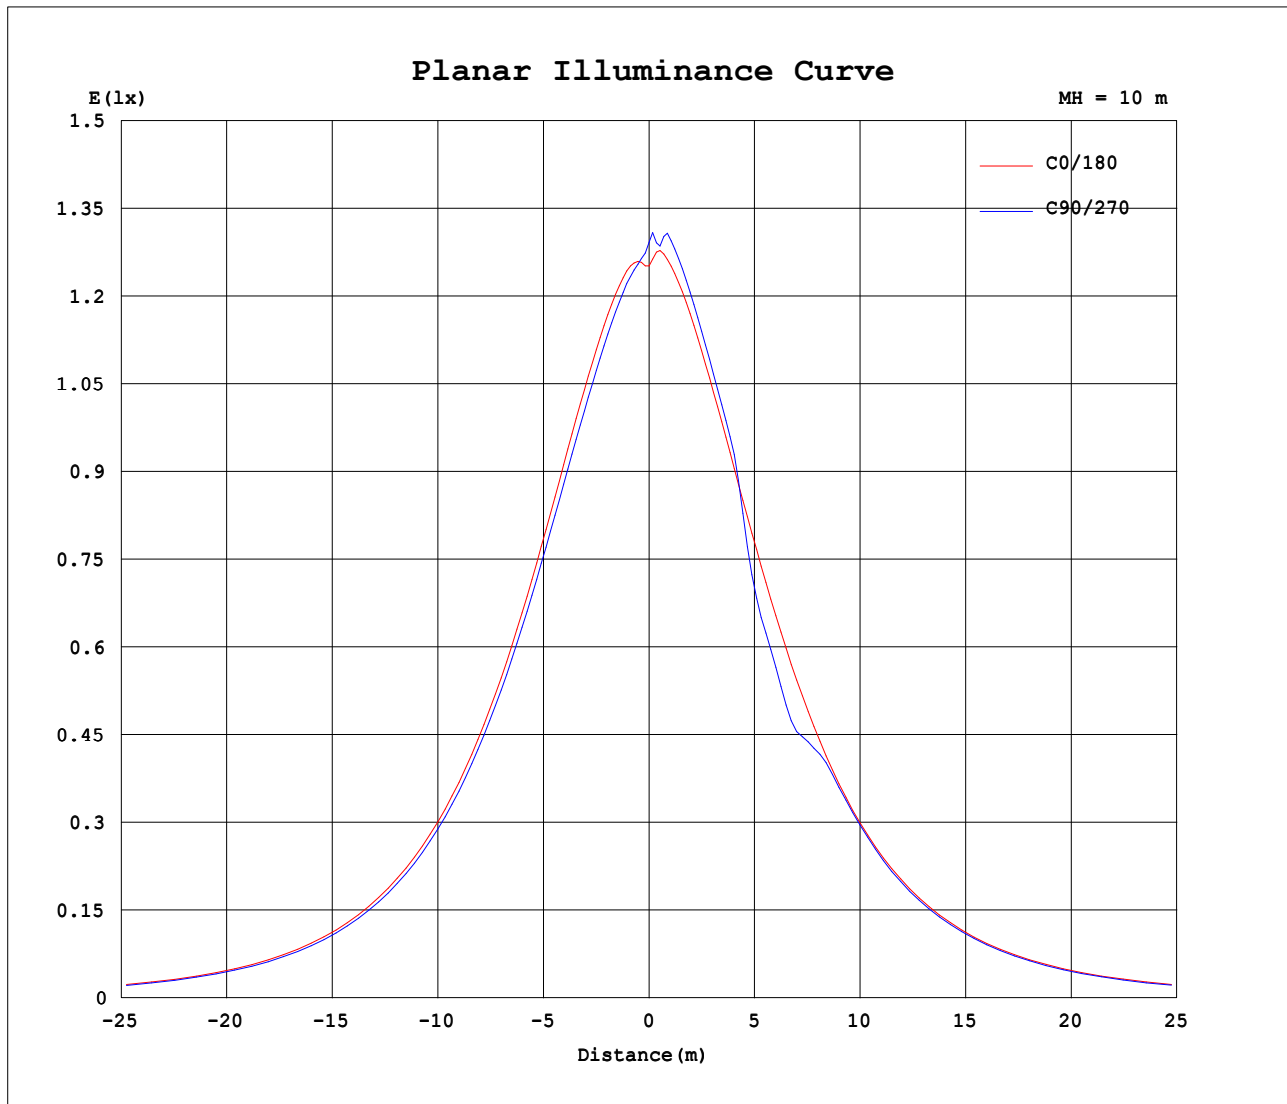


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-10-16

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.16V I:0.9271A P:7.905W PF:0.7011 Freq:59.97Hz Lamp Flux:374.505x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Path Light	WEIGHT:
SPEC.:8W 3000K Max beam angle	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-041

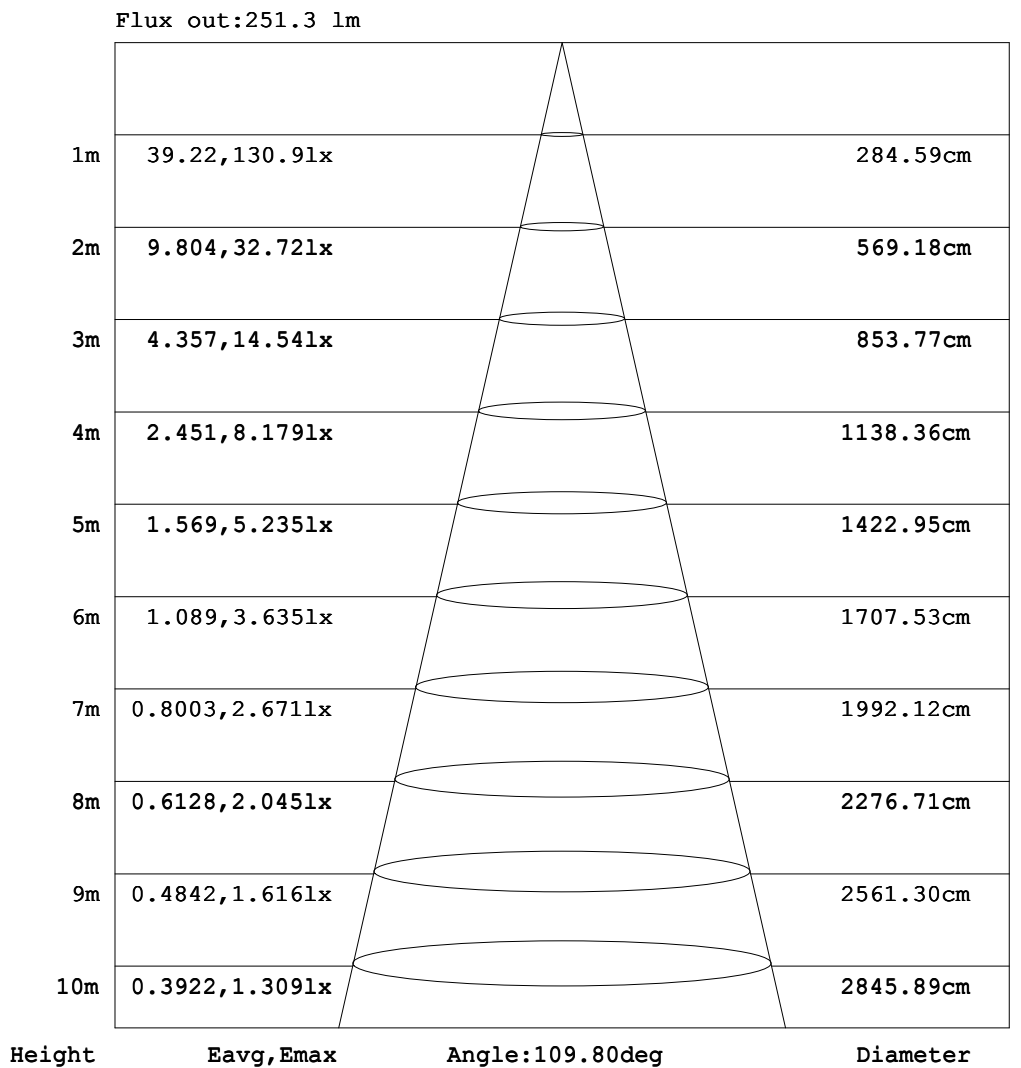

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-10-16

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.16V I:0.9271A P:7.905W PF:0.7011 Freq:59.97Hz Lamp Flux:374.505x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Path Light	WEIGHT:
SPEC.:8W 3000K Max beam angle	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-041

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	3.09	0.00	0.04	0.12	0.23	0.33	0.42	0.52	0.61	0.70	0.78	0.87	0.97	1.04	1.11	1.16	1.21	1.25	1.26
-170	3.09	0.00	0.04	0.13	0.23	0.32	0.42	0.52	0.61	0.70	0.79	0.86	0.96	1.03	1.10	1.16	1.19	1.23	1.24
-160	3.09	0.00	0.03	0.13	0.22	0.31	0.41	0.50	0.58	0.68	0.76	0.84	0.91	0.99	1.04	1.11	1.13	1.17	1.19
-150	3.09	0.00	0.03	0.11	0.20	0.28	0.37	0.46	0.54	0.62	0.70	0.77	0.84	0.90	0.95	0.99	1.04	1.06	1.08
-140	3.09	0.01	0.03	0.08	0.15	0.24	0.32	0.39	0.47	0.55	0.61	0.67	0.74	0.78	0.83	0.87	0.92	0.94	0.96
-130	3.09	0.03	0.01	0.05	0.12	0.18	0.25	0.31	0.38	0.43	0.49	0.55	0.60	0.65	0.69	0.72	0.74	0.77	0.78
-120	3.09	0.08	0.01	0.03	0.06	0.12	0.17	0.22	0.27	0.31	0.36	0.41	0.45	0.48	0.52	0.54	0.57	0.59	0.60
-110	3.09	0.16	0.03	0.02	0.03	0.05	0.07	0.12	0.15	0.19	0.21	0.25	0.28	0.30	0.33	0.35	0.37	0.38	0.39
-100	3.09	0.62	0.15	0.07	0.04	0.02	0.03	0.04	0.05	0.07	0.08	0.09	0.10	0.11	0.12	0.14	0.15	0.16	0.16
-90	3.09	2.93	2.76	2.60	2.43	2.27	2.10	1.94	1.77	1.61	1.44	1.28	1.11	0.95	0.78	0.62	0.45	0.29	0.12
-80	3.09	6.42	7.78	8.44	8.86	9.18	9.49	10.2	11.3	12.7	14.2	15.7	17.1	18.3	18.9	19.5	19.8	20.0	20.0
-70	3.09	8.23	10.1	11.8	14.4	17.8	21.0	23.5	25.9	28.1	30.1	32.0	33.6	35.0	36.2	37.0	37.6	37.9	37.9
-60	3.09	9.46	12.4	16.5	21.3	25.4	29.4	33.3	37.1	40.6	43.9	46.9	49.5	51.7	53.6	55.0	55.9	56.4	56.5
-50	3.09	10.5	15.0	20.9	26.4	31.9	37.4	42.7	47.8	52.6	57.0	61.0	64.5	67.5	69.9	71.7	73.0	73.7	73.8
-40	3.09	11.5	17.5	24.3	31.0	37.9	44.6	51.2	57.5	63.3	68.7	73.5	77.7	81.3	84.3	86.6	88.2	89.0	89.1
-30	3.09	12.3	19.4	27.1	34.9	42.9	50.7	58.2	65.4	72.1	78.3	83.8	88.7	92.9	96.3	99.0	101	102	102
-20	3.09	13.0	20.8	29.2	37.9	46.6	55.3	63.6	71.4	78.8	85.6	91.7	97.1	102	106	109	111	112	112
-10	3.09	13.4	21.7	30.5	39.7	49.0	58.1	66.9	75.2	83.0	90.2	96.8	103	108	112	116	119	121	121
0	3.09	13.7	22.0	31.0	40.4	49.9	59.2	68.2	76.7	84.7	92.1	98.9	105	111	116	120	125	128	125
10	3.09	13.5	21.8	30.6	39.7	49.1	58.2	67.0	75.3	83.2	90.4	95.3	101	106	114	119	123	126	129
20	3.09	13.0	21.0	29.4	37.8	46.7	55.4	63.7	71.6	79.1	86.0	91.6	93.3	97.1	101	107	115	118	119
30	3.09	12.3	19.7	27.4	34.8	42.9	50.8	58.5	65.7	72.4	78.7	84.6	89.4	91.0	89.5	89.7	91.8	92.6	91.8
40	3.09	11.5	17.8	24.7	31.5	37.7	44.7	51.4	57.8	63.7	69.2	74.0	78.4	82.4	85.6	87.8	89.2	89.6	89.5
50	3.09	10.5	15.4	21.4	27.1	32.5	37.1	42.7	48.0	53.0	57.6	61.6	65.2	68.2	70.7	72.6	74.0	74.8	75.0
60	3.09	9.46	12.6	17.3	22.0	26.3	30.5	33.4	36.6	40.6	44.0	47.1	50.0	52.4	54.4	55.9	56.9	57.5	57.6
70	3.09	8.23	10.1	12.1	15.4	19.1	22.2	24.9	27.5	30.0	32.0	32.8	33.1	33.9	35.3	36.4	37.2	37.6	37.6
80	3.09	6.43	7.78	8.44	8.88	9.34	10.1	11.5	13.2	15.1	17.0	18.8	20.2	21.4	22.1	22.6	23.1	23.3	23.5
90	3.09	2.92	2.76	2.59	2.42	2.26	2.09	1.92	1.76	1.59	1.42	1.26	1.09	0.92	0.76	0.59	0.42	0.25	0.09
100	3.09	0.62	0.14	0.06	0.02	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00
110	3.09	0.15	0.02	0.00	0.01	0.02	0.02	0.04	0.05	0.08	0.10	0.13	0.14	0.15	0.15	0.15	0.14	0.14	0.13
120	3.09	0.07	0.00	0.02	0.03	0.07	0.10	0.15	0.18	0.20	0.23	0.29	0.31	0.31	0.33	0.33	0.34	0.34	0.33
130	3.09	0.03	0.00	0.03	0.08	0.14	0.19	0.23	0.30	0.33	0.37	0.42	0.47	0.48	0.50	0.52	0.54	0.57	0.57
140	3.09	0.01	0.02	0.06	0.12	0.20	0.26	0.33	0.38	0.46	0.50	0.55	0.61	0.63	0.66	0.71	0.74	0.75	0.75
150	3.09	0.00	0.02	0.09	0.17	0.24	0.33	0.40	0.48	0.55	0.62	0.67	0.74	0.78	0.81	0.87	0.90	0.92	0.92
160	3.09	0.00	0.03	0.12	0.20	0.29	0.37	0.47	0.54	0.63	0.70	0.77	0.83	0.92	0.94	1.00	1.06	1.06	1.05
170	3.09	0.00	0.03	0.12	0.22	0.31	0.41	0.50	0.59	0.67	0.76	0.83	0.93	0.99	1.07	1.10	1.13	1.18	1.19
180	3.09	0.00	0.04	0.12	0.23	0.33	0.42	0.52	0.61	0.70	0.78	0.87	0.97	1.04	1.11	1.16	1.21	1.25	1.23

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-10-16

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.16V I:0.9271A P:7.905W PF:0.7011 Freq:59.97Hz Lamp Flux:374.505x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Path Light	WEIGHT:
SPEC.:8W 3000K Max beam angle	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-041

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	1.22	1.21	1.20	1.12	1.06	1.04	0.93	0.91	0.78	0.75	0.63	0.58	0.45	0.36	0.30	0.17	0.19	1.70	
-170	1.23	1.21	1.18	1.11	1.07	1.02	0.93	0.90	0.78	0.75	0.62	0.58	0.45	0.35	0.29	0.17	0.19	1.70	
-160	1.17	1.14	1.11	1.08	1.03	0.95	0.93	0.82	0.77	0.71	0.61	0.53	0.45	0.33	0.29	0.17	0.20	1.70	
-150	1.07	1.05	1.01	0.98	0.94	0.91	0.82	0.78	0.73	0.63	0.59	0.47	0.43	0.32	0.25	0.17	0.21	1.70	
-140	0.95	0.94	0.90	0.85	0.81	0.79	0.75	0.68	0.62	0.59	0.48	0.45	0.33	0.30	0.18	0.17	0.23	1.70	
-130	0.78	0.77	0.75	0.73	0.69	0.65	0.62	0.59	0.51	0.46	0.43	0.33	0.31	0.24	0.17	0.17	0.26	1.70	
-120	0.60	0.59	0.57	0.56	0.52	0.49	0.47	0.45	0.40	0.34	0.32	0.28	0.21	0.17	0.17	0.18	0.30	1.70	
-110	0.39	0.38	0.37	0.36	0.34	0.32	0.31	0.29	0.27	0.23	0.19	0.17	0.16	0.16	0.18	0.24	0.36	1.70	
-100	0.16	0.16	0.16	0.16	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.16	0.18	0.22	0.27	0.34	0.57	1.70	
-90	0.21	0.30	0.39	0.48	0.56	0.65	0.74	0.83	0.91	1.00	1.09	1.18	1.27	1.35	1.44	1.53	1.62	1.70	
-80	20.0	19.7	19.3	18.8	18.1	16.8	15.4	13.9	12.3	10.9	9.73	8.98	8.64	8.30	7.87	6.97	4.95	1.70	
-70	37.9	37.6	37.0	36.1	34.9	33.5	31.8	29.9	27.8	25.5	23.1	20.6	17.3	13.8	11.2	9.47	7.35	1.70	
-60	56.4	55.9	55.0	53.5	51.7	49.4	46.8	43.8	40.4	36.8	33.0	29.0	24.9	20.8	15.9	11.7	8.82	1.70	
-50	73.8	73.1	71.8	70.0	67.5	64.5	61.0	57.0	52.6	47.7	42.5	37.1	31.5	25.9	20.3	14.3	9.83	1.70	
-40	89.1	88.3	86.7	84.5	81.5	77.9	73.6	68.8	63.4	57.5	51.1	44.4	37.5	30.6	23.7	16.8	10.8	1.70	
-30	102	101	99.2	96.6	93.2	89.0	84.1	78.5	72.3	65.5	58.3	50.6	42.6	34.5	26.5	18.8	11.6	1.70	
-20	112	111	109	106	102	97.6	92.2	86.0	79.1	71.7	63.7	55.2	46.4	37.5	28.7	20.2	12.2	1.70	
-10	121	119	117	113	108	103	97.4	90.8	83.5	75.6	67.1	58.2	48.9	39.4	30.0	21.0	12.7	1.70	
0	127	124	121	116	111	106	99.6	92.7	85.2	77.1	68.4	59.3	49.8	40.1	30.5	21.3	12.9	1.70	
10	126	123	119	115	107	101	95.9	90.9	83.7	75.7	67.2	58.2	48.9	39.4	30.1	21.1	12.7	1.70	
20	118	115	108	102	97.6	93.7	92.1	86.4	79.4	71.9	63.8	55.3	46.5	37.4	28.9	20.3	12.3	1.70	
30	92.7	92.0	90.0	89.8	91.3	89.7	84.9	79.0	72.7	65.8	58.5	50.7	42.6	34.4	26.9	19.0	11.6	1.70	
40	89.6	89.3	87.9	85.8	82.6	78.6	74.2	69.3	63.8	57.8	51.3	44.5	37.3	31.1	24.1	17.2	10.8	1.70	
50	74.9	74.1	72.7	70.8	68.3	65.2	61.7	57.6	53.0	47.9	42.5	36.8	32.1	26.6	20.8	14.7	9.84	1.70	
60	57.5	56.9	55.9	54.4	52.4	49.9	47.0	43.8	40.4	36.4	33.1	30.2	25.8	21.5	16.6	11.9	8.82	1.70	
70	37.6	37.1	36.3	35.2	33.8	32.9	32.6	31.8	29.7	27.2	24.5	21.7	18.6	14.8	11.5	9.48	7.35	1.70	
80	23.3	23.0	22.5	21.9	21.2	19.9	18.5	16.7	14.8	12.8	11.0	9.57	8.80	8.33	7.87	6.97	4.96	1.70	
90	0.18	0.27	0.36	0.45	0.54	0.63	0.72	0.81	0.90	0.99	1.08	1.17	1.26	1.35	1.43	1.52	1.61	1.70	
100	0.01	0.02	0.03	0.04	0.05	0.06	0.07	0.08	0.09	0.10	0.11	0.13	0.16	0.20	0.26	0.33	0.57	1.70	
110	0.15	0.16	0.17	0.18	0.19	0.19	0.20	0.18	0.16	0.14	0.11	0.12	0.13	0.14	0.16	0.23	0.35	1.70	
120	0.35	0.36	0.36	0.36	0.36	0.35	0.35	0.32	0.29	0.25	0.25	0.22	0.15	0.14	0.15	0.17	0.30	1.70	
130	0.58	0.56	0.55	0.54	0.52	0.51	0.49	0.46	0.41	0.39	0.35	0.27	0.27	0.20	0.15	0.16	0.25	1.70	
140	0.76	0.76	0.74	0.68	0.67	0.67	0.63	0.57	0.54	0.50	0.42	0.39	0.29	0.27	0.16	0.16	0.22	1.70	
150	0.92	0.92	0.89	0.83	0.83	0.82	0.72	0.70	0.65	0.57	0.53	0.43	0.39	0.29	0.23	0.16	0.21	1.70	
160	1.06	1.06	1.01	0.99	0.96	0.87	0.86	0.75	0.73	0.66	0.58	0.50	0.43	0.31	0.27	0.17	0.20	1.70	
170	1.19	1.15	1.12	1.08	1.02	0.99	0.89	0.88	0.75	0.73	0.61	0.57	0.44	0.34	0.29	0.17	0.19	1.70	
180	1.22	1.21	1.20	1.12	1.06	1.04	0.93	0.91	0.78	0.75	0.63	0.58	0.45	0.36	0.30	0.17	0.19	1.70	

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-10-16

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: