

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		1492.6 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of I _{max} At 50% of I _{max} At 90% of I _{max}	82.9V x 82.7H 39.5V x 40.2H 16.5V x 17.0H
Beam Flux	Total To 10% of I _{max} To 50% of I _{max} To 90% of I _{max}	1000.2 lumens per klm. 813.7 lumens per klm. 409.4 lumens per klm. 94.5 lumens per klm.
	Upward LOR Downward LOR	1.2 % 98.8 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-02-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.01V I:0.7104A P:5.421W PF:0.6354 Freq:59.98Hz Lamp Flux:474.886x1 lm		
NAME: Micro	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

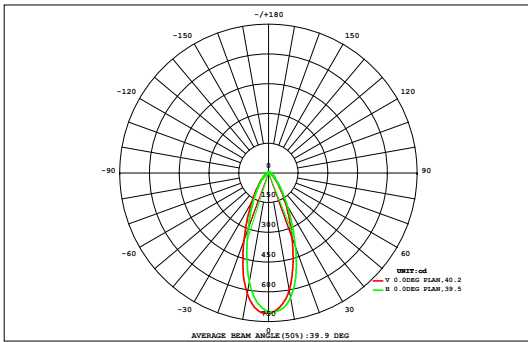

DATA OF LAMP		Eff:87.61lm/W	
MODEL	M4B1-5.5W-30K-A	Imax (cd)	708.8
NOMINAL POWER (W)	5.5	AVAILABILITY (%)	81.6
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	387.3
NOMINAL FLUX (lm)	474.886	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	474.9
TEST VOLTAGE (V)	12	θ @50% (H,V)	40,40DEG


VERTICAL (DEG)	AREA FLUX DIAGRAM															UNIT:lm		Φ t	Φ a	
	0.01	0.04	0.07	0.10	0.14	0.18	0.21	0.24	0.25	0.25	0.23	0.21	0.17	0.14	0.10	0.06	0.03	0.01	2.43	0.00
72	0.01	0.04	0.07	0.10	0.14	0.18	0.21	0.24	0.25	0.25	0.23	0.21	0.17	0.14	0.10	0.06	0.03	0.01	2.43	0.00
64	0.03	0.06	0.11	0.16	0.22	0.29	0.35	0.41	0.44	0.43	0.40	0.35	0.29	0.22	0.16	0.10	0.06	0.02	4.10	0.00
56	0.04	0.08	0.15	0.23	0.34	0.46	0.58	0.68	0.74	0.74	0.67	0.57	0.45	0.33	0.23	0.15	0.08	0.04	6.55	0.00
48	0.05	0.11	0.19	0.32	0.49	0.71	0.94	1.15	1.29	1.29	1.14	0.92	0.69	0.48	0.32	0.19	0.11	0.05	10.4	1.56
40	0.06	0.13	0.25	0.43	0.70	1.08	1.53	1.98	2.29	2.29	1.97	1.51	1.05	0.68	0.42	0.25	0.13	0.06	16.8	11.6
32	0.07	0.15	0.30	0.55	0.96	1.60	2.50	3.51	4.22	4.20	3.47	2.47	1.58	0.95	0.54	0.30	0.16	0.07	27.6	23.8
24	0.08	0.17	0.35	0.67	1.26	2.30	3.97	5.97	7.49	7.43	5.83	3.86	2.27	1.25	0.67	0.35	0.18	0.08	44.2	41.0
	0.08	0.19	0.39	0.78	1.54	3.03	5.58	8.90	11.2	11.1	8.62	5.38	2.97	1.53	0.78	0.39	0.19	0.08	62.7	59.9
	0.08	0.19	0.41	0.83	1.70	3.47	6.63	10.7	13.2	13.0	10.3	6.34	3.39	1.69	0.83	0.41	0.20	0.09	73.5	70.7
	0.08	0.19	0.40	0.82	1.67	3.36	6.35	10.2	12.6	12.5	9.89	6.08	3.29	1.66	0.83	0.41	0.20	0.09	70.5	67.8
	0.08	0.18	0.38	0.74	1.44	2.77	4.92	7.57	9.55	9.51	7.44	4.79	2.74	1.45	0.75	0.38	0.19	0.08	55.0	52.0
-24	0.07	0.16	0.33	0.62	1.14	2.01	3.30	4.80	5.83	5.81	4.75	3.27	2.02	1.16	0.64	0.34	0.17	0.08	36.5	33.2
-32	0.06	0.14	0.28	0.50	0.84	1.35	2.05	2.79	3.25	3.24	2.78	2.07	1.39	0.87	0.51	0.29	0.15	0.07	22.6	18.4
-40	0.06	0.12	0.22	0.38	0.60	0.89	1.25	1.59	1.79	1.80	1.61	1.28	0.93	0.63	0.40	0.24	0.13	0.06	13.9	7.35
-48	0.05	0.10	0.17	0.28	0.41	0.58	0.77	0.93	1.02	1.03	0.94	0.79	0.61	0.44	0.30	0.18	0.10	0.05	8.74	0.00
-56	0.03	0.07	0.13	0.19	0.28	0.38	0.47	0.55	0.60	0.60	0.56	0.49	0.40	0.30	0.21	0.14	0.08	0.03	5.53	0.00
-64	0.02	0.05	0.09	0.13	0.18	0.24	0.29	0.33	0.35	0.36	0.34	0.30	0.25	0.20	0.15	0.10	0.05	0.02	3.42	0.00
-72	0.01	0.02	0.05	0.08	0.11	0.14	0.16	0.19	0.20	0.20	0.19	0.17	0.15	0.12	0.08	0.05	0.02	0.00	1.94	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)	16	24	32	40	48	56	64	72			
Φ t	0.95	2.17	4.26	7.81	14.0	24.8	41.8	62.5	76.4	75.7	61.2	40.9	24.6	14.1	7.92	4.33	2.22	0.97	467	---
Φ a	0.00	0.00	0.00	0.31	8.07	19.8	37.1	57.9	72.0	71.3	56.7	36.2	19.6	8.12	0.33	0.00	0.00	0.00	---	387

one-half-peak spread: U:17.9,D:19.9 , L:19.6,R:20.9 NEMA Beam Type: Type 5

H(β) Range:-90 - 90DEG	V(B) Range:-180 - 180DEG
H(β) Interval: 0.5DEG	V(B) Interval: 0.5DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Temperature:25.3DEG	Humidity:65.0%
Operators:ADMIN	Test Distance:13.563m [K=1.0000]
Test Date:2022-02-26	Remarks:

ISOCANDELA DIAGRAM

Test:U:12.01V I:0.7104A P:5.421W PF:0.6354 Freq:59.98Hz Lamp Flux:474.886x1 lm		
NAME: Micro	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

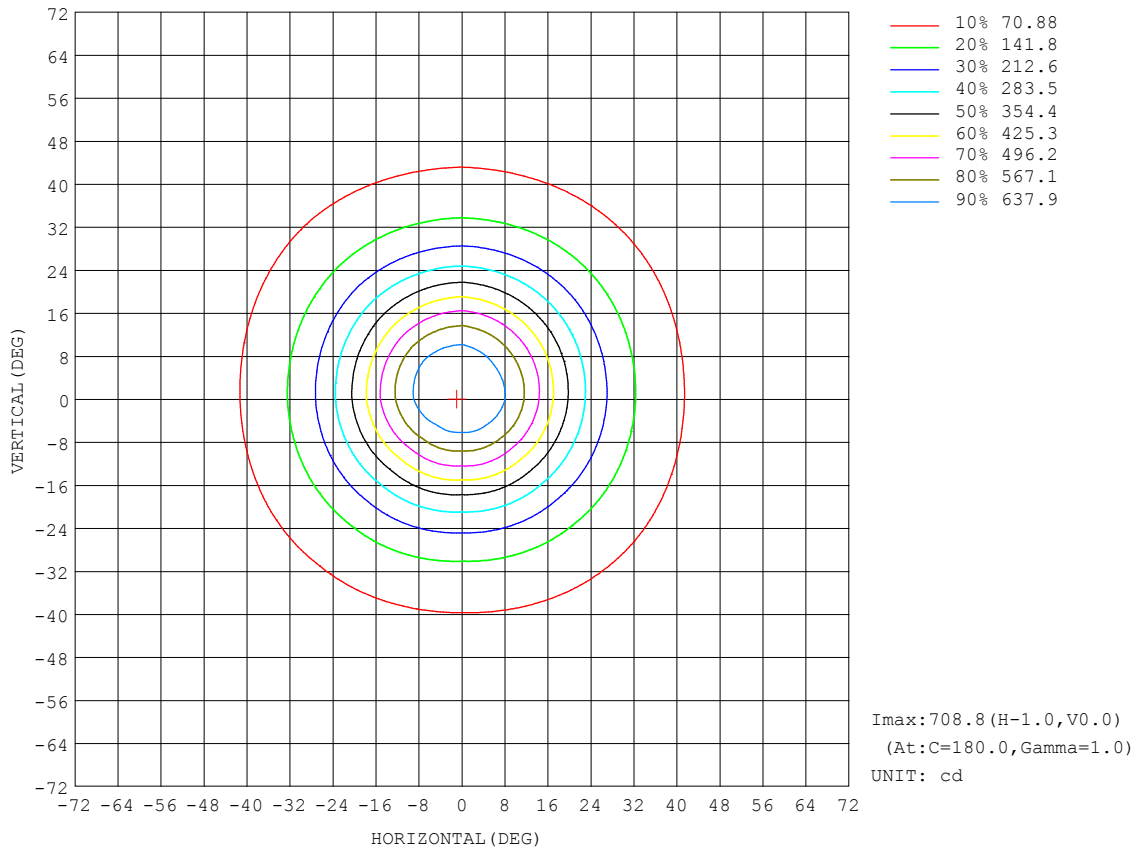


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-02-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.01V I:0.7104A P:5.421W PF:0.6354 Freq:59.98Hz Lamp Flux:474.886x1 lm		
NAME: Micro	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

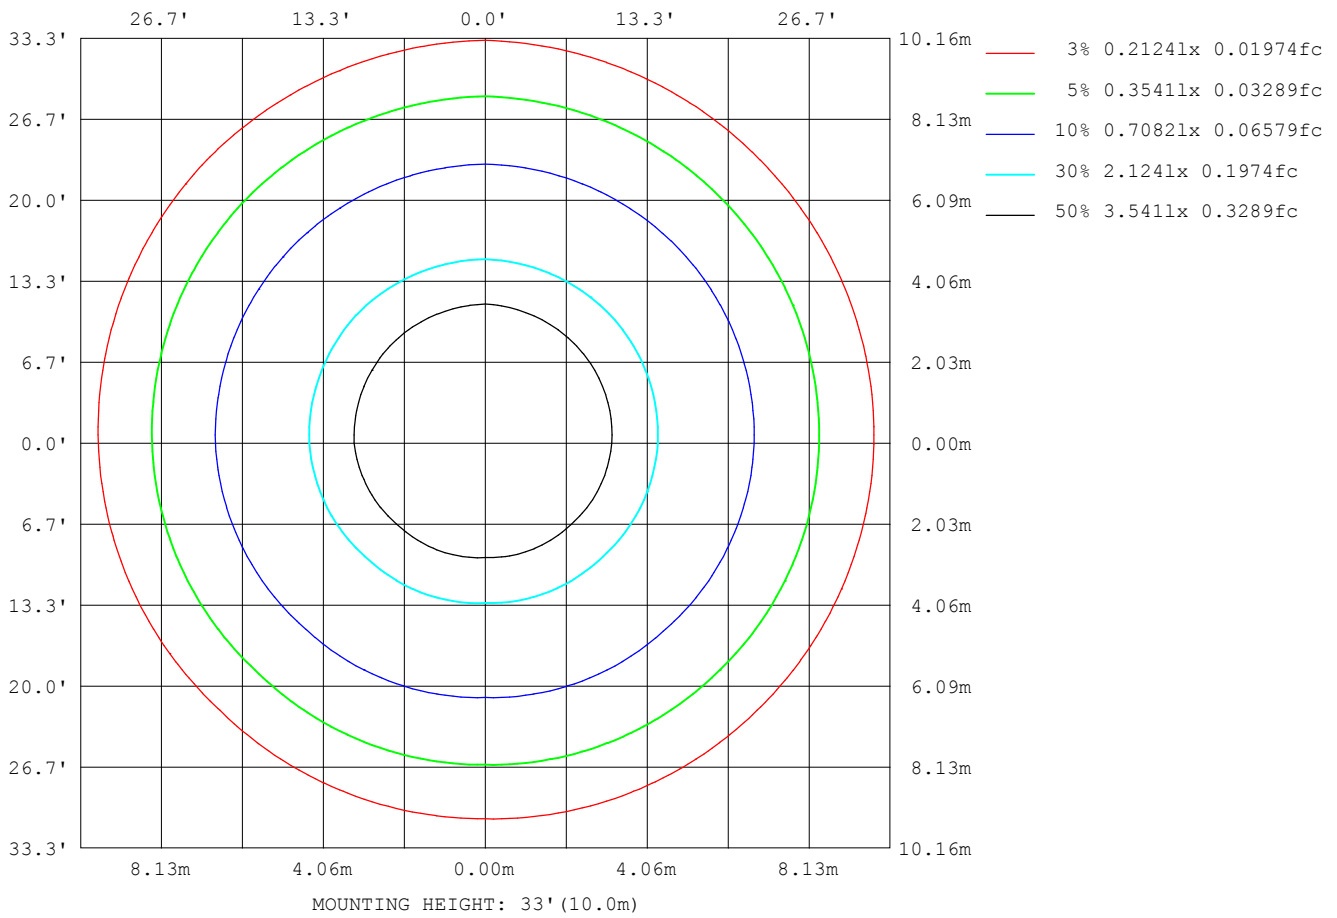

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-02-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

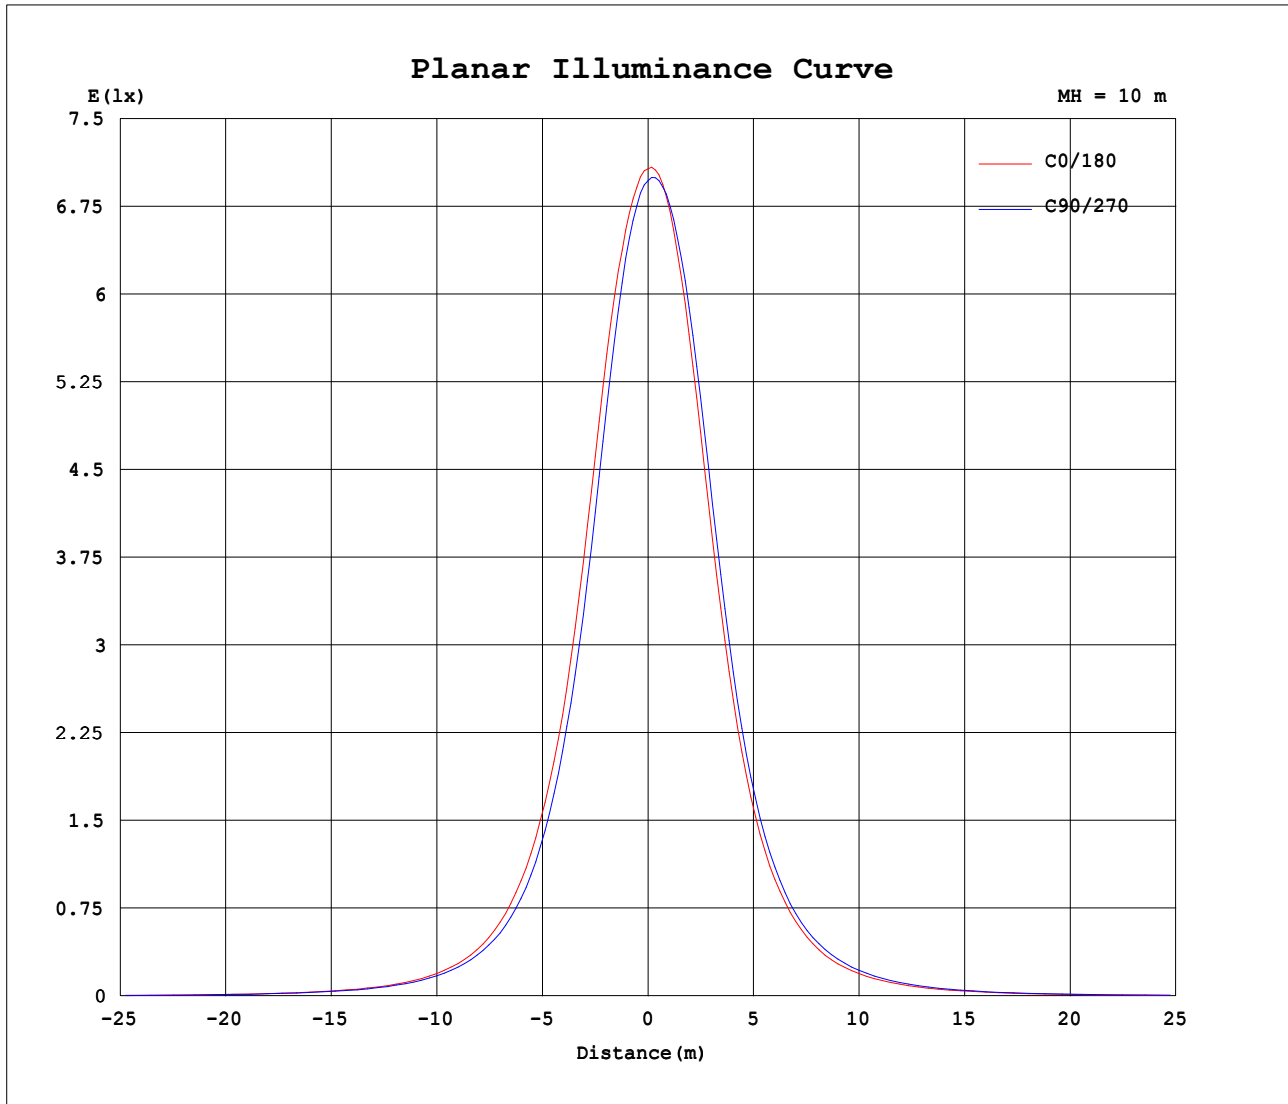


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-02-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.01V I:0.7104A P:5.421W PF:0.6354 Freq:59.98Hz Lamp Flux:474.886x1 lm		
NAME: Micro	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

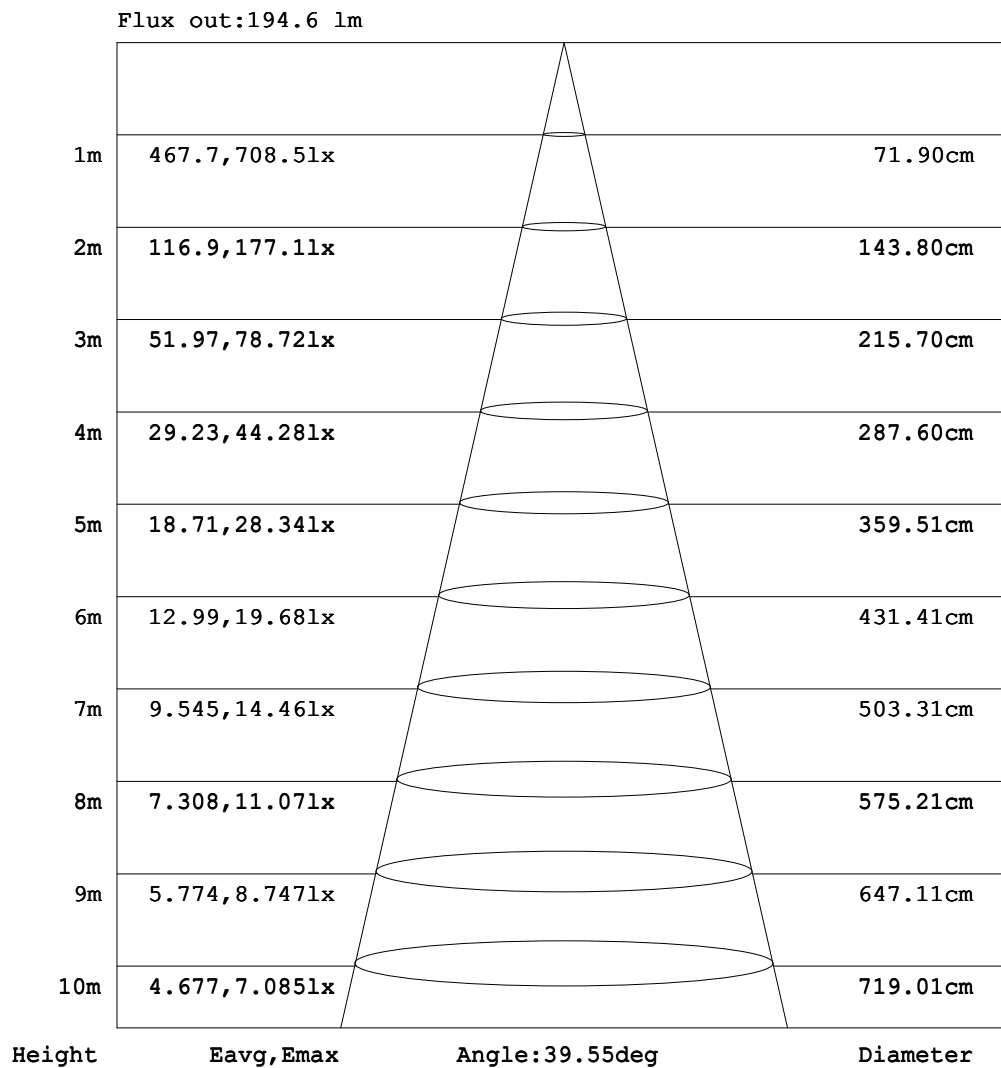

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-02-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.01V I:0.7104A P:5.421W PF:0.6354 Freq:59.98Hz Lamp Flux:474.886x1 lm		
NAME: Micro	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H (DEG) \ V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.24	0.47	0.79	1.18	1.73	2.34	2.98	3.61	4.18	4.62	4.96	5.07
-170	0.00	0.00	0.00	0.00	0.00	0.02	0.11	0.28	0.52	0.86	1.30	1.85	2.50	3.19	3.84	4.43	4.83	4.94	4.96
-160	0.00	0.00	0.00	0.00	0.01	0.03	0.10	0.26	0.48	0.78	1.19	1.69	2.29	2.90	3.53	3.95	4.23	4.42	4.47
-150	0.00	0.00	0.00	0.00	0.00	0.03	0.08	0.20	0.38	0.62	0.93	1.32	1.75	2.22	2.60	2.91	3.14	3.30	3.37
-140	0.00	0.00	0.00	0.00	0.00	0.02	0.05	0.12	0.24	0.41	0.61	0.85	1.10	1.34	1.56	1.75	1.95	2.03	2.07
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.06	0.13	0.21	0.33	0.45	0.55	0.67	0.78	0.86	0.93	1.01	1.04
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.06	0.12	0.17	0.21	0.26	0.28	0.31	0.33	0.35	0.35
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.02	0.02	0.02	0.02
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.07	0.12	0.25	0.38	0.54	0.67	0.81	0.90	0.94	0.95	0.92
-70	0.00	0.00	0.00	0.01	0.23	0.76	1.62	2.65	3.59	4.42	5.19	5.95	6.58	7.14	7.62	8.03	8.34	8.55	8.64
-60	0.00	0.00	0.00	0.51	1.87	3.60	5.12	6.49	7.69	8.92	10.2	11.6	13.0	14.4	15.6	16.6	17.4	17.9	18.1
-50	0.00	0.00	0.22	1.79	4.10	6.14	7.97	9.92	12.1	14.6	17.2	20.0	23.1	26.1	28.9	31.4	33.4	34.6	35.1
-40	0.00	0.00	0.66	3.29	5.90	8.23	10.8	14.0	17.8	22.0	26.9	32.4	38.8	45.9	53.0	59.4	64.9	68.3	69.3
-30	0.00	0.00	1.22	4.47	7.29	10.2	13.8	18.5	24.2	31.1	40.0	51.1	64.2	79.7	97.4	116	131	141	143
-20	0.00	0.00	1.80	5.31	8.36	11.9	16.6	22.7	30.6	41.3	55.8	75.4	102	137	179	225	267	296	302
-10	0.00	0.00	2.24	5.84	9.09	13.1	18.7	25.9	35.8	50.1	70.5	102	146	209	290	383	472	540	558
0	0.00	0.00	2.42	6.06	9.40	13.7	19.5	27.4	38.2	54.2	77.8	116	171	254	366	501	620	691	707
10	0.00	0.00	2.32	5.96	9.27	13.4	19.1	26.7	37.1	52.1	73.9	107	157	228	323	436	548	618	640
20	0.00	0.00	1.94	5.53	8.69	12.4	17.5	24.1	32.7	44.6	61.0	83.7	116	160	215	277	336	380	399
30	0.00	0.00	1.39	4.80	7.74	10.9	14.9	20.1	26.6	34.8	45.4	59.0	75.9	95.7	119	144	167	183	189
40	0.00	0.00	0.82	3.72	6.46	9.02	12.0	15.7	20.1	25.3	31.5	38.7	46.8	55.6	64.9	73.6	81.0	86.2	88.4
50	0.00	0.00	0.33	2.29	4.78	6.97	9.10	11.5	14.2	17.3	20.7	24.2	27.9	31.7	35.2	38.4	41.1	42.9	43.8
60	0.00	0.00	0.04	0.81	2.66	4.55	6.25	7.83	9.40	11.1	12.8	14.4	16.2	17.7	19.3	20.5	21.5	22.1	22.4
70	0.00	0.00	0.00	0.07	0.55	1.51	2.89	4.13	5.25	6.27	7.13	7.92	8.65	9.29	9.86	10.3	10.7	11.0	11.1
80	0.00	0.00	0.00	0.00	0.00	0.02	0.12	0.34	0.64	0.99	1.39	1.81	2.29	2.70	3.02	3.27	3.45	3.58	3.64
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.03	0.04	0.05
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.14	0.17	0.25	0.30	0.34	0.36	0.37
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.13	0.19	0.30	0.44	0.59	0.71	0.82	0.92	0.98	1.00
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.17	0.30	0.47	0.67	0.90	1.16	1.43	1.69	1.89	2.03	2.07
160	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.15	0.30	0.50	0.78	1.11	1.50	1.93	2.36	2.76	3.09	3.29	3.37
170	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.21	0.41	0.69	1.05	1.50	2.05	2.64	3.20	3.70	4.07	4.33	4.45
180	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.24	0.47	0.79	1.18	1.73	2.34	2.98	3.61	4.18	4.62	4.96	5.10

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-02-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.01V I:0.7104A P:5.421W PF:0.6354 Freq:59.98Hz Lamp Flux:474.886x1 lm		
NAME: Micro	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H (DEG) \ V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	5.07	5.00	4.75	4.42	3.84	3.21	2.58	1.87	1.35	0.88	0.59	0.30	0.14	0.00	0.00	0.00	0.00	0.00
-170	4.96	4.89	4.63	4.24	3.69	3.07	2.44	1.80	1.26	0.83	0.53	0.29	0.14	0.00	0.00	0.00	0.00	0.00
-160	4.45	4.29	4.02	3.64	3.15	2.60	2.03	1.50	1.07	0.70	0.46	0.25	0.12	0.01	0.00	0.00	0.00	0.00
-150	3.32	3.18	2.95	2.65	2.29	1.88	1.47	1.10	0.79	0.52	0.32	0.17	0.04	0.00	0.00	0.00	0.00	0.00
-140	2.04	1.97	1.78	1.59	1.36	1.14	0.90	0.69	0.50	0.33	0.19	0.10	0.01	0.00	0.00	0.00	0.00	0.00
-130	1.01	0.94	0.87	0.79	0.68	0.57	0.47	0.35	0.24	0.17	0.07	0.02	0.00	0.00	0.00	0.00	0.00	0.00
-120	0.35	0.33	0.31	0.29	0.26	0.20	0.18	0.13	0.07	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-110	0.02	0.02	0.02	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.92	0.89	0.83	0.73	0.60	0.47	0.31	0.17	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	8.68	8.60	8.41	8.10	7.68	7.11	6.42	5.64	4.73	3.63	2.28	1.22	0.54	0.11	0.00	0.00	0.00	0.00
-60	18.1	17.8	17.2	16.4	15.3	14.1	12.8	11.5	10.0	8.59	6.99	5.32	3.39	1.35	0.32	0.00	0.00	0.00
-50	34.9	34.0	32.3	29.9	27.3	24.5	21.6	18.7	15.9	13.3	10.9	8.69	6.41	3.99	1.26	0.09	0.00	0.00
-40	68.8	65.8	60.7	54.4	47.5	40.7	34.3	28.5	23.3	18.9	15.0	11.7	8.86	6.04	2.85	0.43	0.00	0.00
-30	141	131	116	99.2	81.7	66.5	52.9	41.5	32.4	25.2	19.4	14.7	10.9	7.65	4.34	0.84	0.00	0.00
-20	295	264	222	177	137	104	77.0	57.3	42.3	31.4	23.4	17.4	12.6	8.83	5.26	1.24	0.00	0.00
-10	538	465	374	281	205	145	102	71.5	51.0	36.4	26.4	19.3	13.8	9.58	5.83	1.53	0.00	0.00
0	678	602	479	348	245	169	115	78.3	54.9	38.6	27.6	20.0	14.2	9.86	6.05	1.64	0.00	0.00
10	605	531	421	310	222	155	106	73.9	52.3	37.0	26.8	19.5	13.9	9.65	5.90	1.59	0.00	0.00
20	376	328	269	209	157	115	83.0	60.8	44.2	32.5	24.1	17.7	12.8	8.97	5.40	1.34	0.00	0.00
30	182	166	143	118	94.5	74.6	58.0	44.6	34.2	26.3	20.1	15.2	11.2	7.86	4.57	0.96	0.00	0.00
40	85.9	80.5	72.8	63.9	54.6	45.6	37.5	30.7	24.9	19.9	15.8	12.2	9.18	6.36	3.25	0.55	0.00	0.00
50	42.8	40.8	37.9	34.6	31.0	27.3	23.6	20.3	17.1	14.1	11.5	9.15	6.88	4.49	1.64	0.17	0.00	0.00
60	22.1	21.4	20.3	19.0	17.5	15.9	14.2	12.5	10.9	9.28	7.69	6.00	4.20	1.98	0.54	0.00	0.00	0.00
70	10.9	10.7	10.3	9.75	9.14	8.45	7.70	6.83	5.88	4.86	3.68	2.25	1.06	0.34	0.01	0.00	0.00	0.00
80	3.51	3.32	3.06	2.72	2.32	1.88	1.42	1.03	0.68	0.40	0.16	0.01	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.04	0.03	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.36	0.33	0.29	0.23	0.16	0.13	0.03	0.02	0.03	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.98	0.92	0.81	0.69	0.57	0.41	0.31	0.23	0.19	0.11	0.07	0.03	0.00	0.00	0.00	0.00	0.00	0.00
150	2.02	1.89	1.68	1.43	1.16	0.94	0.77	0.60	0.44	0.29	0.17	0.10	0.01	0.00	0.00	0.00	0.00	0.00
160	3.29	3.08	2.76	2.40	2.09	1.77	1.41	1.05	0.76	0.49	0.33	0.17	0.09	0.00	0.00	0.00	0.00	0.00
170	4.32	4.04	3.87	3.54	3.11	2.58	2.07	1.53	1.08	0.72	0.46	0.25	0.13	0.00	0.00	0.00	0.00	0.00
180	5.07	5.00	4.75	4.42	3.84	3.21	2.58	1.87	1.35	0.88	0.59	0.30	0.14	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-02-26

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: