Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity		**2151.2 cd per klm.**
(Luminaire orientation as tested.)		**0.0 degrees vertical**
		0.0 degrees horizontal
Beam Spread	**At 10% of Imax**	**60.5V x 56.5H**
	At 50% of Imax	**38.7V x 40.3H**
	At 90% of Imax	**24.7V x 29.1H**
Beam Flux	**Total**	**1000.3 lumens per klm.**
	To 10% of Imax	**887.4 lumens per klm.**
	To 50% of Imax	**647.6 lumens per klm.**
	To 90% of Imax	**348.0 lumens per klm.**
	Upward LOR	**1.5 %**
	Downward LOR	**98.6 %**
Luminaire Efficiency(Light Output Ratio)		**100.0 %**

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.17V I:1.302A P:11.47W PF:0.7240 Freq:59.98Hz Lamp Flux:306.168x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spotlight RGBWW	WEIGHT:
SPEC.:12W GREEN 40°LENS	DIM.:	SERIAL No.:2
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWN-LIGHT SHROUD

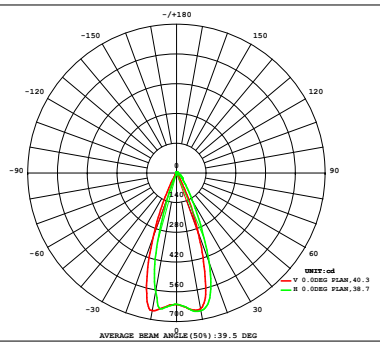

DATA OF LAMP		Eff:26.69lm/W	
MODEL	D9A2-12W-BZ	Imax(cd)	658.6
NOMINAL POWER(W)	12	AVAILABILITY(%)	87.5
RATED VOLTAGE(V)	12	Avai. FLUX(lm)	267.9
NOMINAL FLUX(lm)	306.168	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	306.2
TEST VOLTAGE(V)	12	θ @50%(H,V)	40,39DEG

AREA FLUX DIAGRAM — UNIT:lm

VERTICAL(DEG)	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL(DEG) 10	15	20	25	30	35	40	45	Φ t	Φ a
45	0.05	0.07	0.10	0.13	0.17	0.22	0.27	0.31	0.35	0.35	0.31	0.27	0.22	0.17	0.13	0.10	0.07	0.05	3.33	0.00
40	0.05	0.08	0.11	0.16	0.22	0.29	0.36	0.44	0.51	0.51	0.44	0.36	0.29	0.22	0.16	0.12	0.08	0.05	4.46	0.80
35	0.06	0.09	0.13	0.19	0.28	0.40	0.56	0.72	0.85	0.85	0.72	0.56	0.41	0.28	0.20	0.14	0.09	0.06	6.58	4.16
30	0.06	0.10	0.15	0.24	0.39	0.61	0.90	1.21	1.46	1.46	1.21	0.90	0.61	0.39	0.25	0.16	0.10	0.06	10.3	8.43
25	0.06	0.10	0.17	0.30	0.55	0.98	1.56	2.16	2.58	2.57	2.13	1.54	0.96	0.55	0.31	0.18	0.11	0.06	16.9	15.4
20	0.06	0.11	0.19	0.38	0.81	1.58	2.56	3.43	3.95	3.94	3.38	2.50	1.53	0.79	0.38	0.20	0.11	0.06	26.0	24.7
15	0.05	0.10	0.20	0.48	1.16	2.31	3.58	4.47	4.83	4.81	4.42	3.48	2.21	1.11	0.47	0.21	0.11	0.06	34.1	33.0
10	0.05	0.09	0.20	0.56	1.48	2.91	4.28	4.92	4.98	4.98	4.88	4.19	2.77	1.40	0.53	0.20	0.10	0.05	38.6	37.6
5	0.03	0.07	0.17	0.58	1.63	3.19	4.59	4.91	4.80	4.82	4.91	4.48	3.02	1.51	0.54	0.18	0.08	0.04	39.6	38.7
0	0.03	0.06	0.14	0.51	1.49	3.00	4.43	4.85	4.79	4.81	4.85	4.33	2.83	1.37	0.47	0.14	0.06	0.03	38.2	37.4
-5	0.02	0.05	0.11	0.37	1.11	2.33	3.70	4.51	4.73	4.74	4.47	3.61	2.19	1.02	0.34	0.11	0.06	0.03	33.5	32.7
-10	0.02	0.04	0.08	0.22	0.65	1.46	2.45	3.34	3.69	3.67	3.29	2.36	1.37	0.60	0.21	0.08	0.04	0.02	23.6	22.7
-15	0.01	0.03	0.05	0.11	0.29	0.68	1.21	1.66	1.82	1.81	1.60	1.15	0.63	0.27	0.11	0.06	0.03	0.02	11.5	10.4
-20	0.01	0.02	0.03	0.06	0.11	0.22	0.38	0.54	0.56	0.55	0.52	0.36	0.20	0.11	0.06	0.04	0.02	0.01	3.79	1.92
-25	0.01	0.01	0.02	0.03	0.05	0.07	0.09	0.09	0.05	0.05	0.08	0.09	0.07	0.05	0.04	0.03	0.02	0.01	0.83	0.00
-30	0.00	0.01	0.01	0.02	0.02	0.03	0.03	0.02	0.01	0.01	0.02	0.03	0.03	0.03	0.02	0.01	0.01	0.01	0.32	0.00
-35	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.01	0.01	0.02	0.01	0.01	0.01	0.01	0.00	0.16	0.00
-40	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.08	0.00
-45																				
Φ t	0.57	1.02	1.88	4.36	10.4	20.3	31.0	37.6	40.0	39.9	37.3	30.2	19.4	9.89	4.24	1.96	1.10	0.62	292	---
Φ a	0.00	0.00	0.00	1.85	8.80	19.0	29.9	36.7	39.2	39.2	36.3	29.1	18.1	8.24	1.61	0.00	0.00	0.00	---	268

one-half-peak spread: U:8.6,D:14.2 , L:10.5,R:10.9 **NEMA Beam Type: Type 4**

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.17V I:1.302A P:11.47W PF:0.7240 Freq:59.98Hz Lamp Flux:306.168x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spotlight RGBWW	WEIGHT:
SPEC.:12W GREEN 40°LENS	DIM.:	SERIAL No.:2
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWN-LIGHT SHROUD

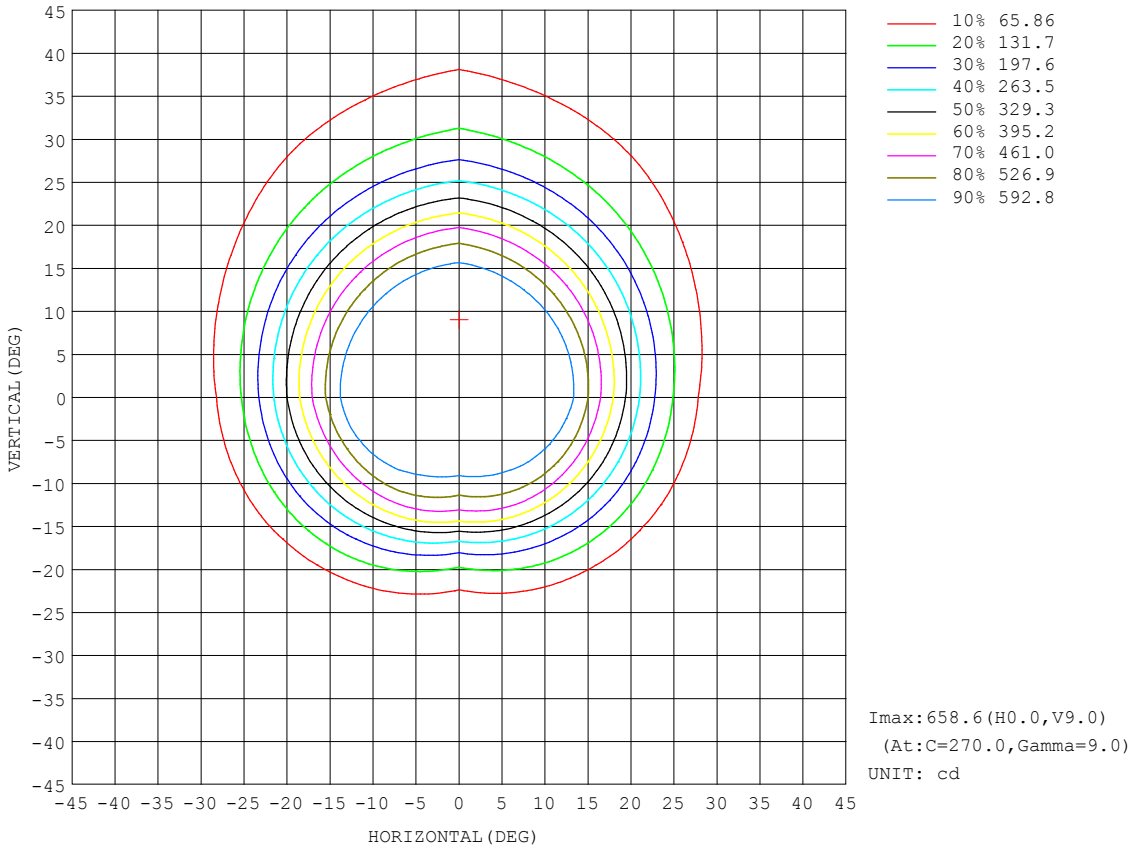

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:12.17V I:1.302A P:11.47W PF:0.7240 Freq:59.98Hz Lamp Flux:306.168x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spotlight RGBWW	WEIGHT:
SPEC.:12W GREEN 40°LENS	DIM.:	SERIAL No.:2
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWN-LIGHT SHROUD

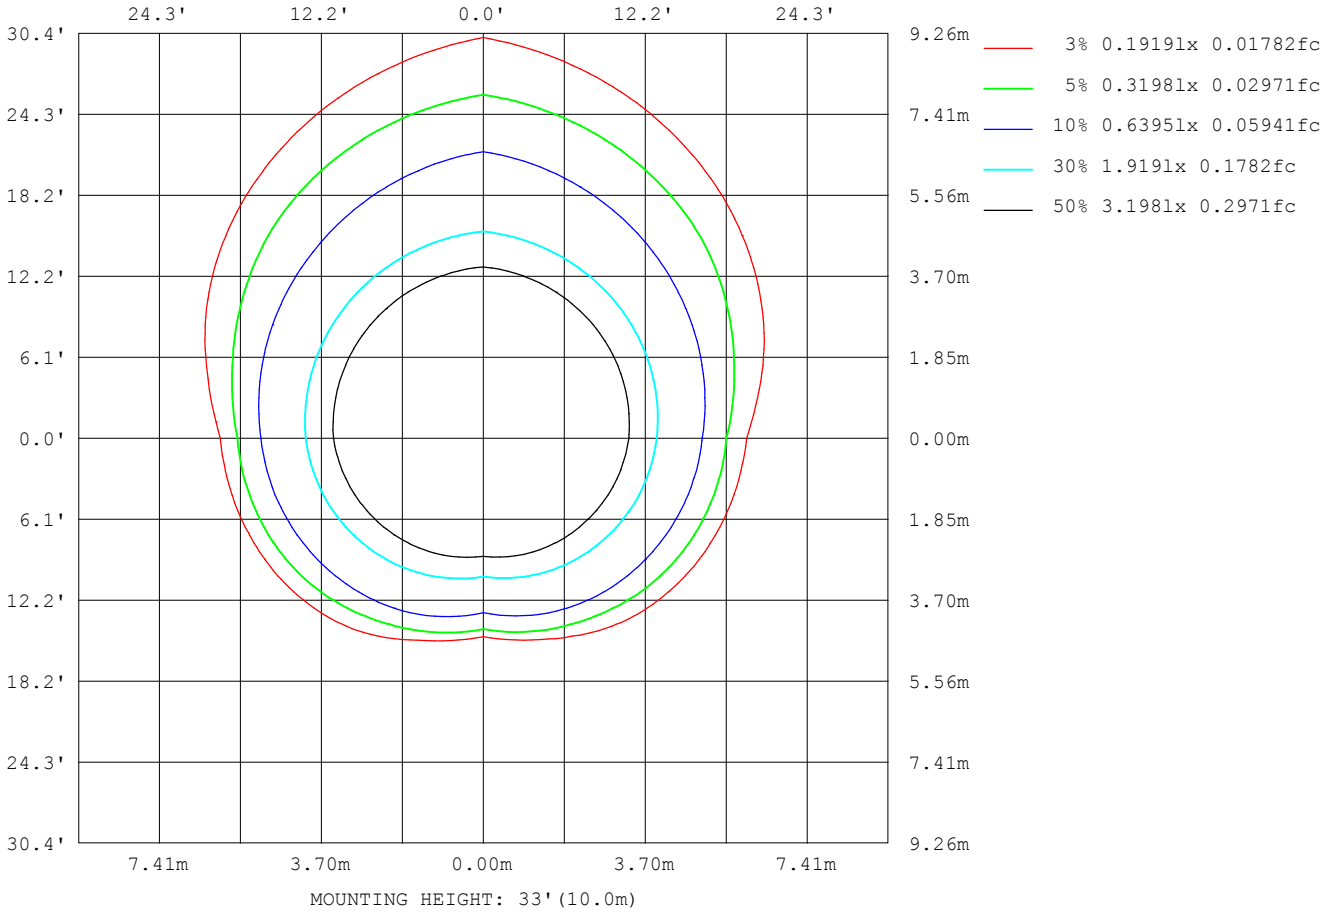

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

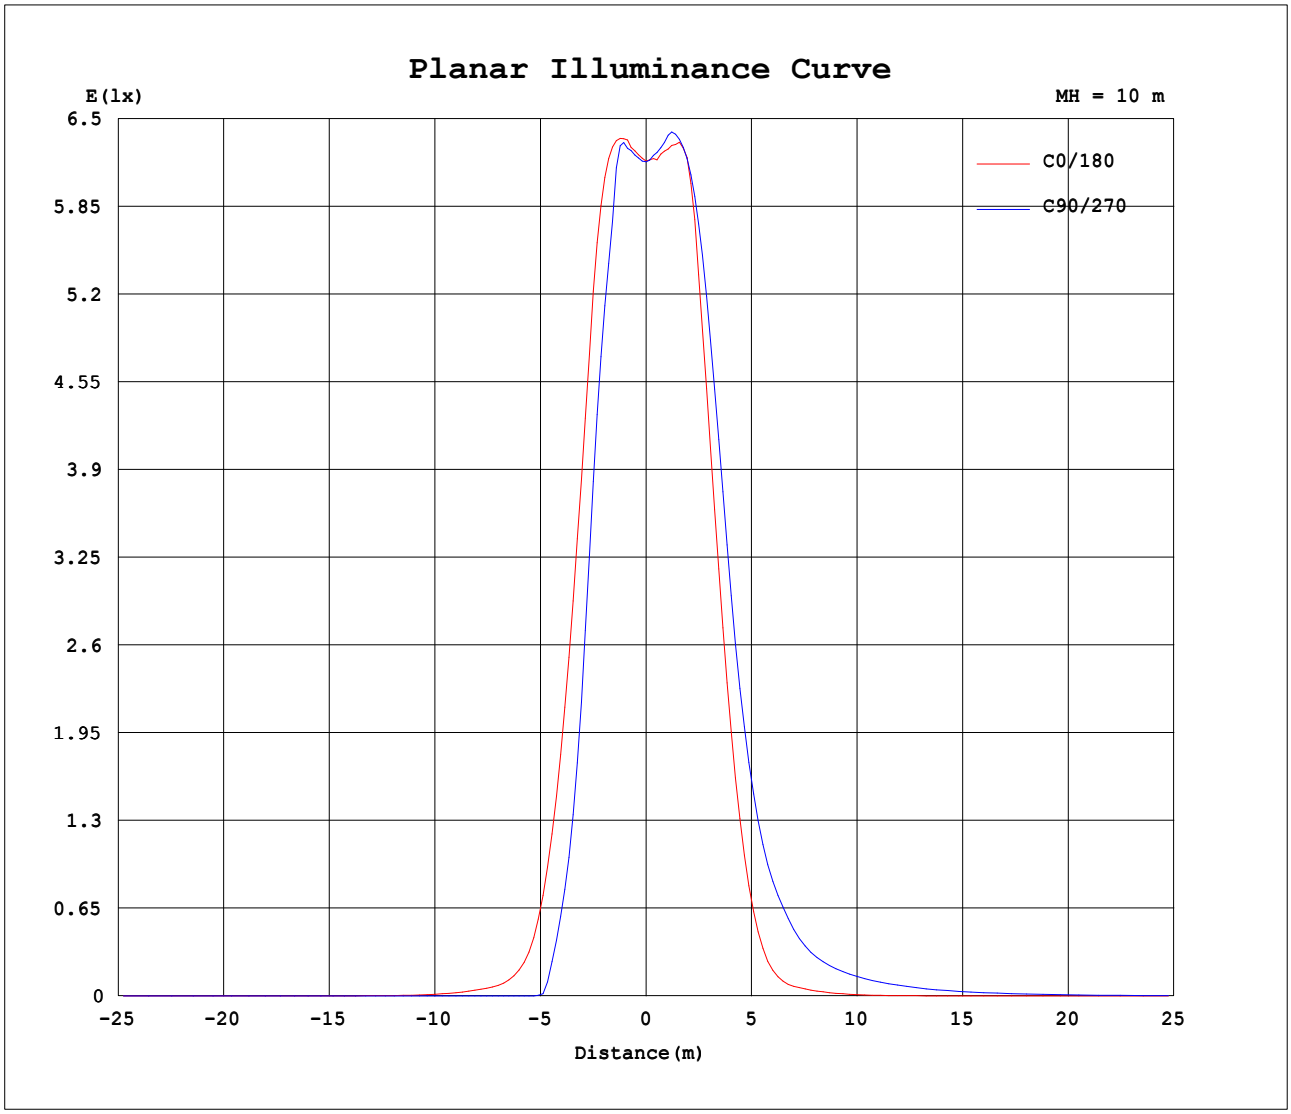

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.17V I:1.302A P:11.47W PF:0.7240 Freq:59.98Hz Lamp Flux:306.168x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spotlight RGBWWWEIGHT:	
SPEC.:12W GREEN 40°LENS	DIM.:	SERIAL No.:2
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWN-LIGHT SHROUD

Flux out:196.3 lm

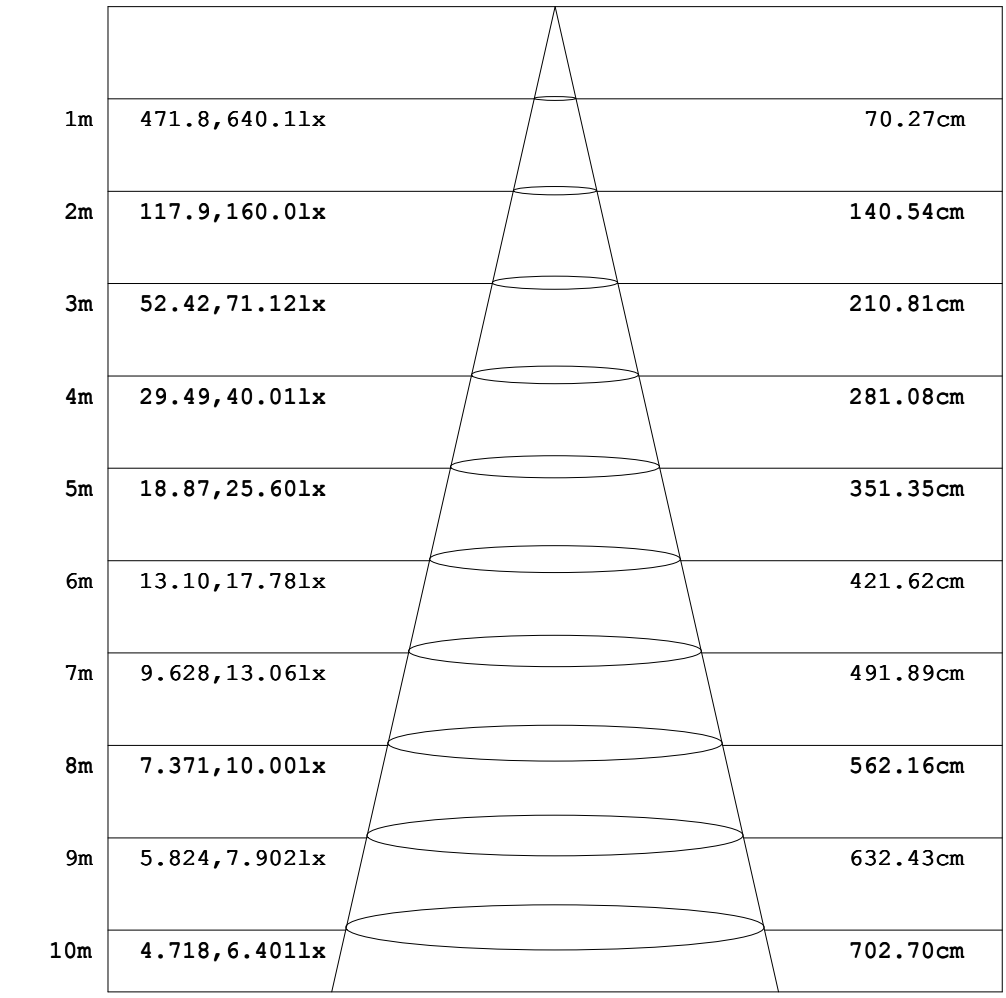

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.17V I:1.302A P:11.47W PF:0.7240 Freq:59.98Hz Lamp Flux:306.168x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spotlight RGBWW	WEIGHT:
SPEC.:12W GREEN 40°LENS	DIM.:	SERIAL No.:2
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWN-LIGHT SHROUD

Table--1 UNIT: cd

H(DEG) / V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.41	0.93	1.55	2.19	2.77	3.25	3.71	4.11	4.17
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.06	0.14	0.51	1.04	1.67	2.34	2.98	3.51	3.88	4.19	4.43
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.10	0.19	0.42	0.87	1.42	2.02	2.62	3.19	3.66	4.05	4.34
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.09	0.17	0.31	0.55	0.93	1.38	1.84	2.29	2.68	3.02	3.26
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.05	0.11	0.19	0.32	0.48	0.69	0.97	1.25	1.50	1.72	1.89
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.08	0.12	0.20	0.28	0.39	0.49	0.60	0.69	0.76
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.06	0.09	0.11	0.15	0.17	0.19
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.02	0.02	0.01	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.09	0.10	0.12	0.12	0.13	0.11	0.10	0.07	0.04	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.12	0.18	0.25	0.29	0.30	0.31	0.30	0.27	0.23	0.16	0.09	0.00
-40	0.00	0.00	0.00	0.00	0.00	0.09	0.16	0.25	0.37	0.47	0.52	0.57	0.71	0.98	1.21	1.24	1.01	0.57	0.00
-30	0.00	0.00	0.00	0.00	0.01	0.15	0.27	0.44	0.57	0.72	1.01	1.91	3.08	4.17	4.95	5.56	5.84	3.99	0.00
-20	0.00	0.00	0.00	0.00	0.09	0.22	0.39	0.60	0.79	1.22	2.78	5.15	8.14	15.6	36.1	72.1	119	139	124
-10	0.00	0.00	0.00	0.00	0.13	0.29	0.51	0.73	1.02	2.27	5.18	9.60	22.0	72.2	188	341	497	570	568
0	0.00	0.00	0.00	0.00	0.14	0.32	0.57	0.83	1.20	3.04	6.91	13.1	39.8	140	329	548	658	633	618
10	0.00	0.01	0.03	0.07	0.34	0.75	1.40	2.34	3.70	6.55	12.0	21.8	46.0	121	271	458	602	655	658
20	0.00	0.03	0.06	0.12	0.45	1.03	1.93	3.34	5.29	8.31	13.6	21.9	37.0	66.9	127	220	324	407	450
30	0.00	0.04	0.09	0.16	0.41	1.10	2.05	3.55	5.63	8.49	12.5	18.4	26.4	38.0	55.8	80.5	107	132	150
40	0.00	0.05	0.11	0.19	0.36	0.96	1.83	3.02	4.82	7.20	10.2	14.0	18.7	24.3	30.6	37.5	44.6	51.3	56.5
50	0.00	0.06	0.13	0.21	0.33	0.60	1.29	2.21	3.39	4.95	6.95	9.32	12.1	15.1	18.4	21.8	25.1	28.0	30.5
60	0.00	0.06	0.14	0.22	0.32	0.45	0.67	1.11	1.90	2.81	3.85	5.01	6.33	7.82	9.38	10.9	12.4	13.7	14.8
70	0.00	0.07	0.14	0.22	0.32	0.42	0.53	0.65	0.81	1.02	1.33	1.76	2.29	2.91	3.54	4.14	4.68	5.14	5.52
80	0.00	0.07	0.14	0.22	0.30	0.38	0.47	0.56	0.65	0.75	0.85	0.96	1.06	1.17	1.27	1.38	1.48	1.58	1.68
90	0.00	0.07	0.14	0.21	0.27	0.34	0.41	0.48	0.55	0.62	0.69	0.75	0.82	0.89	0.96	1.03	1.10	1.17	1.23
100	0.00	0.07	0.13	0.19	0.24	0.29	0.35	0.39	0.43	0.47	0.51	0.55	0.59	0.62	0.66	0.70	0.74	0.79	0.83
110	0.00	0.06	0.11	0.16	0.20	0.24	0.27	0.29	0.31	0.33	0.34	0.36	0.37	0.39	0.39	0.41	0.43	0.46	0.49
120	0.00	0.05	0.10	0.14	0.16	0.18	0.20	0.20	0.21	0.21	0.21	0.21	0.21	0.20	0.21	0.19	0.20	0.21	0.22
130	0.00	0.05	0.08	0.11	0.13	0.14	0.14	0.14	0.13	0.12	0.11	0.10	0.09	0.07	0.05	0.03	0.02	0.01	0.00
140	0.00	0.04	0.07	0.09	0.09	0.09	0.09	0.09	0.07	0.06	0.04	0.01	0.00	0.00	0.04	0.06	0.06	0.03	0.00
150	0.00	0.03	0.05	0.06	0.07	0.06	0.06	0.05	0.04	0.02	0.00	0.04	0.16	0.27	0.48	0.66	0.81	0.86	0.81
160	0.00	0.02	0.03	0.04	0.04	0.04	0.03	0.03	0.01	0.00	0.08	0.31	0.65	1.06	1.46	1.82	2.10	2.22	2.20
170	0.00	0.01	0.02	0.02	0.02	0.02	0.01	0.01	0.00	0.01	0.28	0.69	1.23	1.79	2.34	2.78	3.13	3.32	3.33
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.41	0.93	1.55	2.19	2.77	3.25	3.71	4.11	4.17

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.17V I:1.302A P:11.47W PF:0.7240 Freq:59.98Hz Lamp Flux:306.168x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spotlight RGBWW	WEIGHT:
SPEC.:12W GREEN 40°LENS	DIM.:	SERIAL No.:2
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWN-LIGHT SHROUD

Table--2 UNIT: cd

H(DEG) / V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	4.25	4.06	3.89	3.56	3.02	2.35	1.68	1.06	0.56	0.14	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-170	4.31	4.19	4.00	3.57	2.99	2.34	1.67	1.06	0.54	0.17	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00
-160	4.18	3.91	3.55	3.05	2.51	1.91	1.34	0.81	0.38	0.10	0.04	0.02	0.00	0.00	0.00	0.00	0.00	0.00
-150	3.11	2.86	2.54	2.14	1.73	1.27	0.86	0.46	0.17	0.09	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00
-140	1.78	1.60	1.40	1.14	0.87	0.59	0.36	0.19	0.11	0.05	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-130	0.70	0.62	0.50	0.39	0.28	0.20	0.12	0.08	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-120	0.17	0.15	0.11	0.09	0.06	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.02	0.03	0.04	0.05	0.06	0.05	0.05	0.04	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.05	0.09	0.13	0.16	0.19	0.19	0.19	0.19	0.16	0.12	0.09	0.04	0.00	0.00	0.00	0.00	0.00	0.00
-50	0.11	0.21	0.29	0.34	0.38	0.41	0.40	0.38	0.35	0.29	0.24	0.15	0.08	0.01	0.00	0.00	0.00	0.00
-40	0.68	1.21	1.50	1.53	1.30	0.97	0.75	0.66	0.59	0.50	0.39	0.29	0.17	0.07	0.00	0.00	0.00	0.00
-30	3.91	5.99	6.10	5.47	4.77	3.68	2.45	1.37	0.90	0.74	0.58	0.42	0.29	0.14	0.01	0.00	0.00	0.00
-20	135	113	66.9	32.8	16.1	9.01	6.01	3.52	1.67	1.00	0.78	0.56	0.37	0.19	0.05	0.00	0.00	0.00
-10	566	490	325	174	65.8	22.6	10.6	6.17	3.00	1.35	0.95	0.68	0.44	0.24	0.07	0.00	0.00	0.00
0	641	650	528	303	129	38.4	14.6	8.11	3.91	1.62	1.06	0.76	0.48	0.27	0.08	0.00	0.00	0.00
10	650	595	443	257	115	46.6	22.8	13.0	7.29	4.03	2.55	1.58	0.90	0.45	0.14	0.03	0.01	0.00
20	403	318	215	123	67.4	37.9	22.8	14.3	8.75	5.50	3.51	2.10	1.18	0.55	0.17	0.06	0.03	0.00
30	132	107	81.1	56.3	38.6	27.0	18.9	12.9	8.67	5.80	3.69	2.20	1.25	0.54	0.17	0.09	0.04	0.00
40	51.4	44.8	37.8	30.9	24.6	18.9	14.1	10.3	7.32	4.95	3.17	1.96	1.04	0.44	0.19	0.11	0.05	0.00
50	28.1	25.1	21.9	18.5	15.2	12.2	9.43	7.04	5.05	3.49	2.33	1.37	0.68	0.34	0.21	0.13	0.06	0.00
60	13.7	12.4	11.0	9.43	7.87	6.40	5.09	3.93	2.89	1.96	1.20	0.71	0.45	0.32	0.22	0.14	0.06	0.00
70	5.15	4.69	4.15	3.57	2.95	2.35	1.81	1.37	1.04	0.81	0.65	0.53	0.42	0.32	0.22	0.14	0.07	0.00
80	1.58	1.48	1.38	1.27	1.17	1.06	0.96	0.85	0.75	0.65	0.56	0.47	0.38	0.30	0.22	0.14	0.07	0.00
90	1.17	1.10	1.03	0.96	0.89	0.82	0.75	0.69	0.62	0.55	0.48	0.41	0.34	0.27	0.21	0.14	0.07	0.00
100	0.79	0.74	0.70	0.66	0.62	0.59	0.55	0.51	0.47	0.43	0.39	0.35	0.29	0.24	0.19	0.13	0.07	0.00
110	0.46	0.43	0.41	0.39	0.39	0.37	0.36	0.34	0.33	0.31	0.29	0.27	0.24	0.20	0.16	0.11	0.06	0.00
120	0.21	0.20	0.19	0.21	0.20	0.21	0.21	0.21	0.21	0.21	0.20	0.20	0.18	0.16	0.14	0.10	0.05	0.00
130	0.02	0.03	0.04	0.05	0.07	0.09	0.10	0.11	0.12	0.13	0.14	0.14	0.14	0.13	0.11	0.08	0.05	0.00
140	0.09	0.16	0.21	0.21	0.18	0.11	0.06	0.04	0.06	0.07	0.09	0.09	0.09	0.09	0.09	0.07	0.04	0.00
150	0.95	0.99	0.91	0.78	0.63	0.50	0.35	0.15	0.02	0.04	0.05	0.06	0.06	0.07	0.06	0.05	0.03	0.00
160	2.35	2.35	2.18	1.89	1.55	1.14	0.78	0.47	0.19	0.01	0.03	0.03	0.04	0.04	0.04	0.03	0.02	0.00
170	3.44	3.43	3.27	2.94	2.43	1.90	1.33	0.83	0.41	0.11	0.01	0.01	0.02	0.02	0.02	0.02	0.01	0.00
180	4.25	4.06	3.89	3.56	3.02	2.35	1.68	1.06	0.56	0.14	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-06-07

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: