

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		2801.5 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	53.8V x 53.5H
	At 50% of Imax	34.1V x 35.6H
	At 90% of Imax	18.0V x 17.0H
Beam Flux	Total	1000.4 lumens per klm.
	To 10% of Imax	894.8 lumens per klm.
	To 50% of Imax	623.0 lumens per klm.
	To 90% of Imax	188.8 lumens per klm.
	Upward LOR	1.5 %
	Downward LOR	98.5 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-27

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.06V I:1.312A P:11.39W PF:0.7199 Freq:59.99Hz Lamp Flux:728.795x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot light CW	WEIGHT:
SPEC.:12W 5700K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWN-LIGHT SHROUD

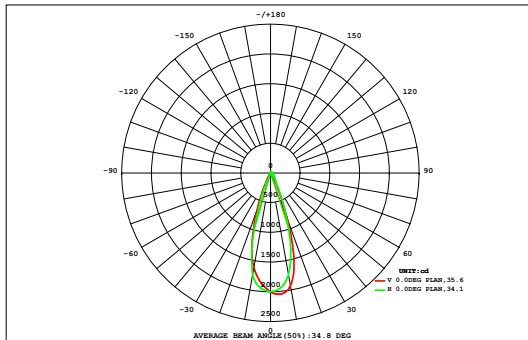

DATA OF LAMP		Eff:63.96lm/W	
MODEL	D7A2-12W-BZ	Imax (cd)	2042
NOMINAL POWER (W)	12	AVAILABILITY (%)	88.6
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	645.4
NOMINAL FLUX (lm)	728.795	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	728.8
TEST VOLTAGE (V)	12	θ @50% (H,V)	36,34DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.05	0.07	0.11	0.16	0.22	0.29	0.37	0.44	0.50	0.50	0.44	0.37	0.29	0.22	0.16	0.11	0.07	0.04	4.41	0.00
45	0.05	0.07	0.11	0.16	0.22	0.29	0.37	0.44	0.50	0.50	0.44	0.37	0.29	0.22	0.16	0.11	0.07	0.04	4.41	0.00
40	0.06	0.09	0.14	0.21	0.31	0.42	0.54	0.66	0.76	0.76	0.66	0.54	0.42	0.30	0.21	0.14	0.09	0.06	6.38	0.00
35	0.07	0.11	0.18	0.28	0.42	0.60	0.81	1.01	1.18	1.18	1.01	0.81	0.60	0.42	0.28	0.18	0.11	0.07	9.30	0.00
30	0.07	0.13	0.22	0.37	0.58	0.90	1.31	1.74	2.07	2.08	1.76	1.32	0.90	0.58	0.36	0.22	0.13	0.07	14.8	7.28
25	0.08	0.15	0.26	0.47	0.85	1.51	2.46	3.46	4.16	4.21	3.58	2.56	1.56	0.86	0.47	0.26	0.14	0.08	27.1	22.1
20	0.08	0.16	0.31	0.63	1.33	2.68	4.58	6.48	7.71	7.89	6.90	4.98	2.89	1.39	0.63	0.30	0.15	0.08	49.2	45.4
15	0.08	0.16	0.35	0.83	2.05	4.33	7.26	9.90	11.4	11.7	10.7	8.24	4.92	2.25	0.86	0.34	0.15	0.07	75.7	72.6
10	0.07	0.15	0.37	1.04	2.81	5.88	9.50	12.3	13.8	14.2	13.4	11.1	7.05	3.22	1.13	0.37	0.14	0.06	96.5	93.9
5	0.05	0.12	0.36	1.16	3.26	6.74	10.6	13.2	14.6	15.2	14.8	12.7	8.44	3.89	1.29	0.36	0.11	0.04	107	105
0	0.04	0.10	0.32	1.06	3.13	6.60	10.5	13.2	14.6	15.2	14.8	12.6	8.30	3.76	1.19	0.32	0.09	0.03	106	104
-5	0.03	0.08	0.25	0.78	2.42	5.43	9.15	12.2	13.8	14.2	13.3	10.7	6.59	2.83	0.86	0.24	0.07	0.03	93.0	90.6
-10	0.03	0.06	0.17	0.48	1.41	3.60	6.43	9.21	10.9	11.2	10.0	7.40	4.19	1.61	0.51	0.16	0.05	0.02	67.4	64.8
-15	0.02	0.04	0.10	0.25	0.61	1.65	3.42	5.10	6.13	6.31	5.52	3.82	1.86	0.68	0.25	0.09	0.04	0.01	35.9	32.9
-20	0.01	0.03	0.06	0.12	0.25	0.47	0.99	1.78	2.24	2.29	1.89	1.10	0.52	0.26	0.11	0.05	0.02	0.01	12.2	7.68
-25	0.01	0.02	0.03	0.06	0.10	0.15	0.20	0.20	0.16	0.17	0.22	0.21	0.16	0.09	0.05	0.03	0.01	0.01	1.86	0.00
-30	0.01	0.01	0.02	0.03	0.04	0.05	0.06	0.05	0.02	0.02	0.05	0.06	0.05	0.03	0.02	0.01	0.01	0.01	0.55	0.00
-35	0.01	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.02	0.02	0.01	0.01	0.01	0.01	0.01	0.21	0.00
-40	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.10	0.00
-45	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.10	0.00
	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)	10	15	20	25	30	35	40	45			
Φ t	0.76	1.49	3.26	7.95	19.8	41.3	68.2	90.8	104	107	99.2	78.4	48.7	22.4	8.41	3.19	1.40	0.68	707	---
Φ a	0.00	0.00	0.00	1.09	14.8	37.2	64.6	87.6	101	104	95.9	74.9	44.7	17.6	1.96	0.00	0.00	0.00	---	645

one-half-peak spread: U:16.2,D:18.0 , L:20.8,R:14.9


NEMA Beam Type: Type 4

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-27

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.06V I:1.312A P:11.39W PF:0.7199 Freq:59.99Hz Lamp Flux:728.795x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot light CW	WEIGHT:
SPEC.:12W 5700K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWN-LIGHT SHROUD

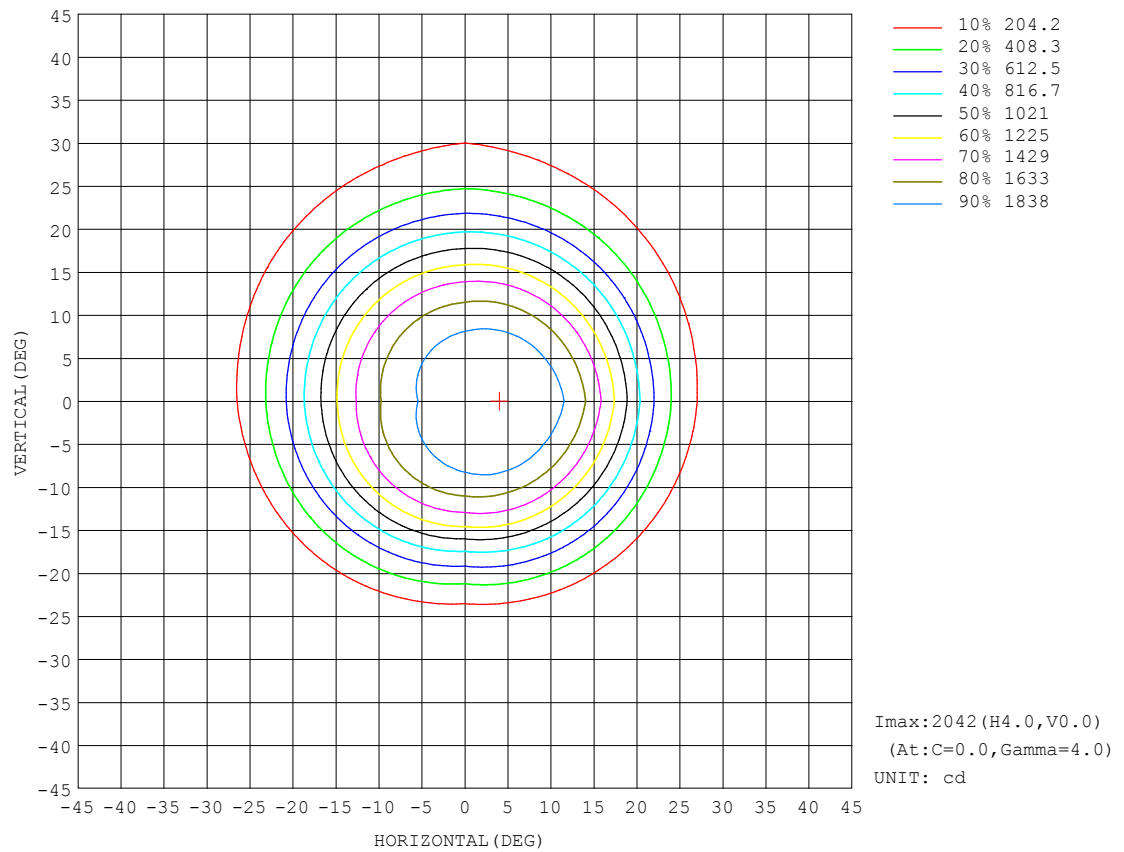


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-27

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.06V I:1.312A P:11.39W PF:0.7199 Freq:59.99Hz Lamp Flux:728.795x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot light CW	WEIGHT:
SPEC.:12W 5700K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWN-LIGHT SHROUD

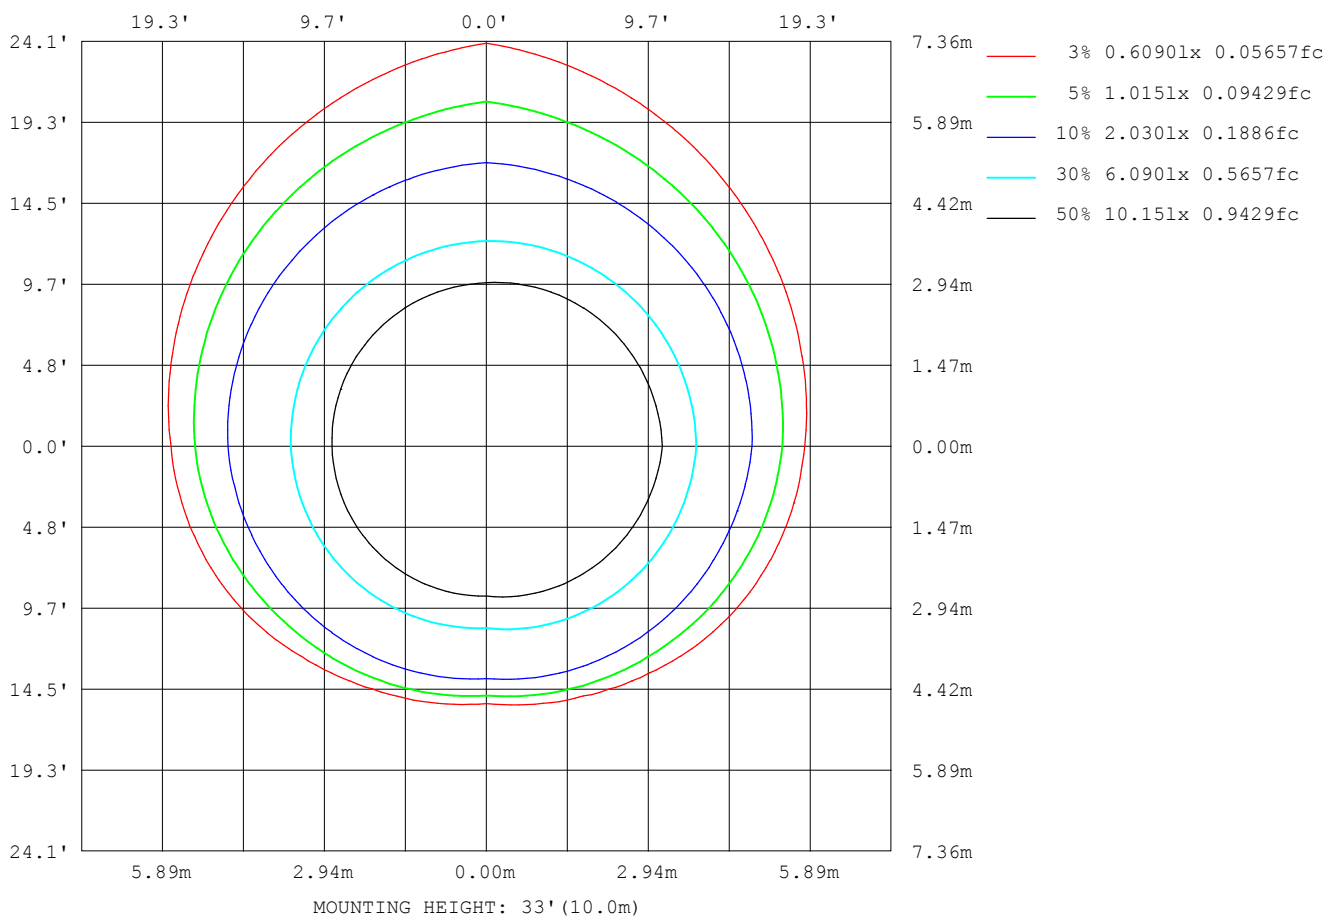

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-27

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

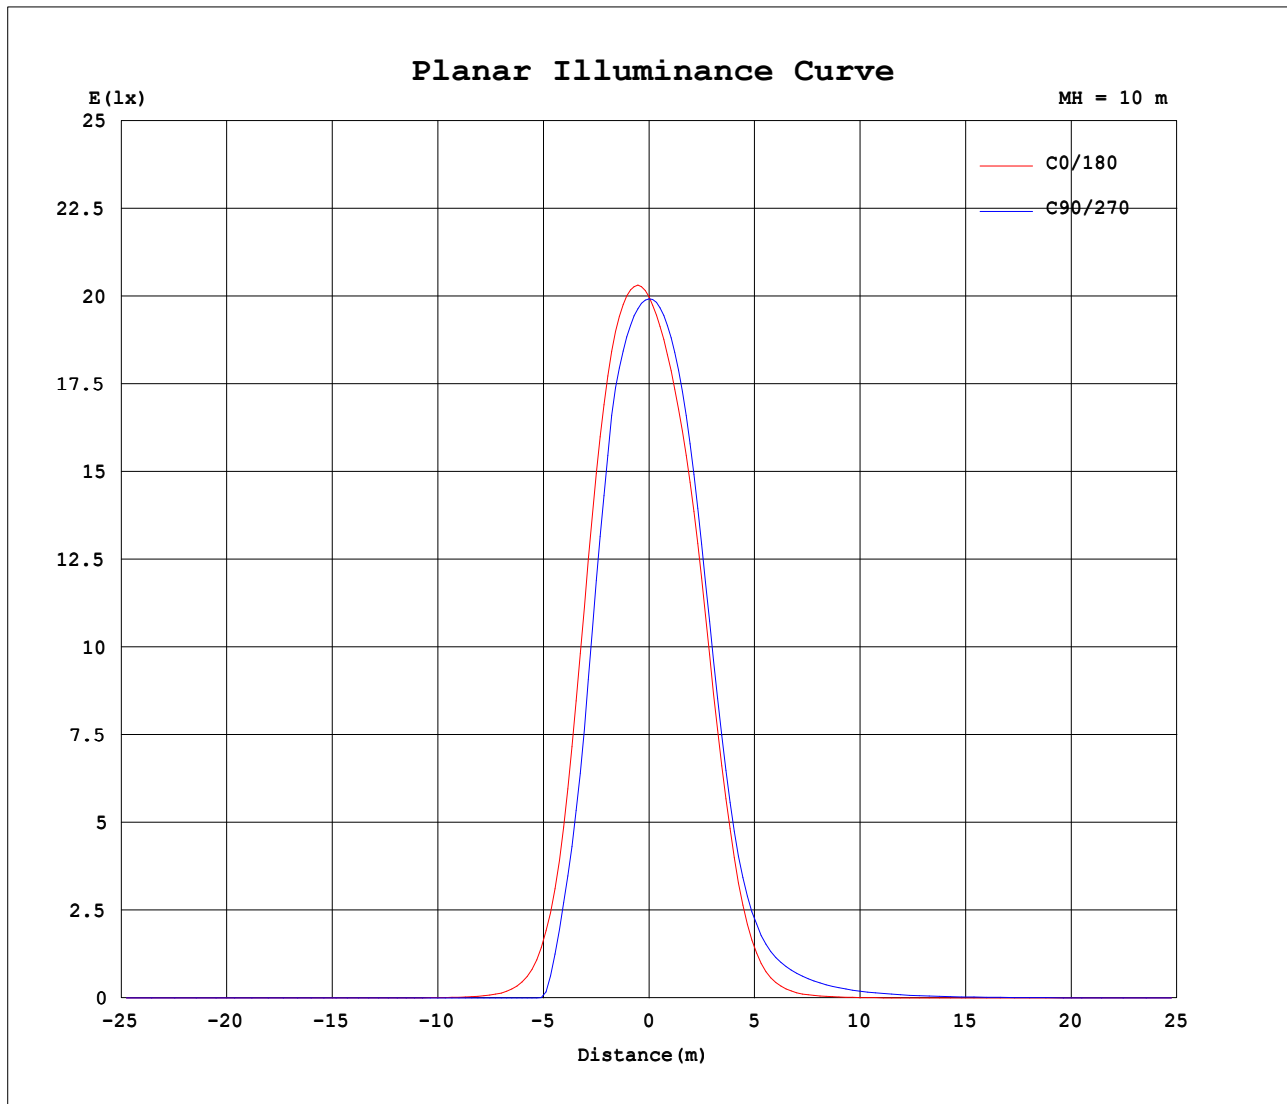


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-27

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.06V I:1.312A P:11.39W PF:0.7199 Freq:59.99Hz Lamp Flux:728.795x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot light CW	WEIGHT:
SPEC.:12W 5700K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWN-LIGHT SHROUD

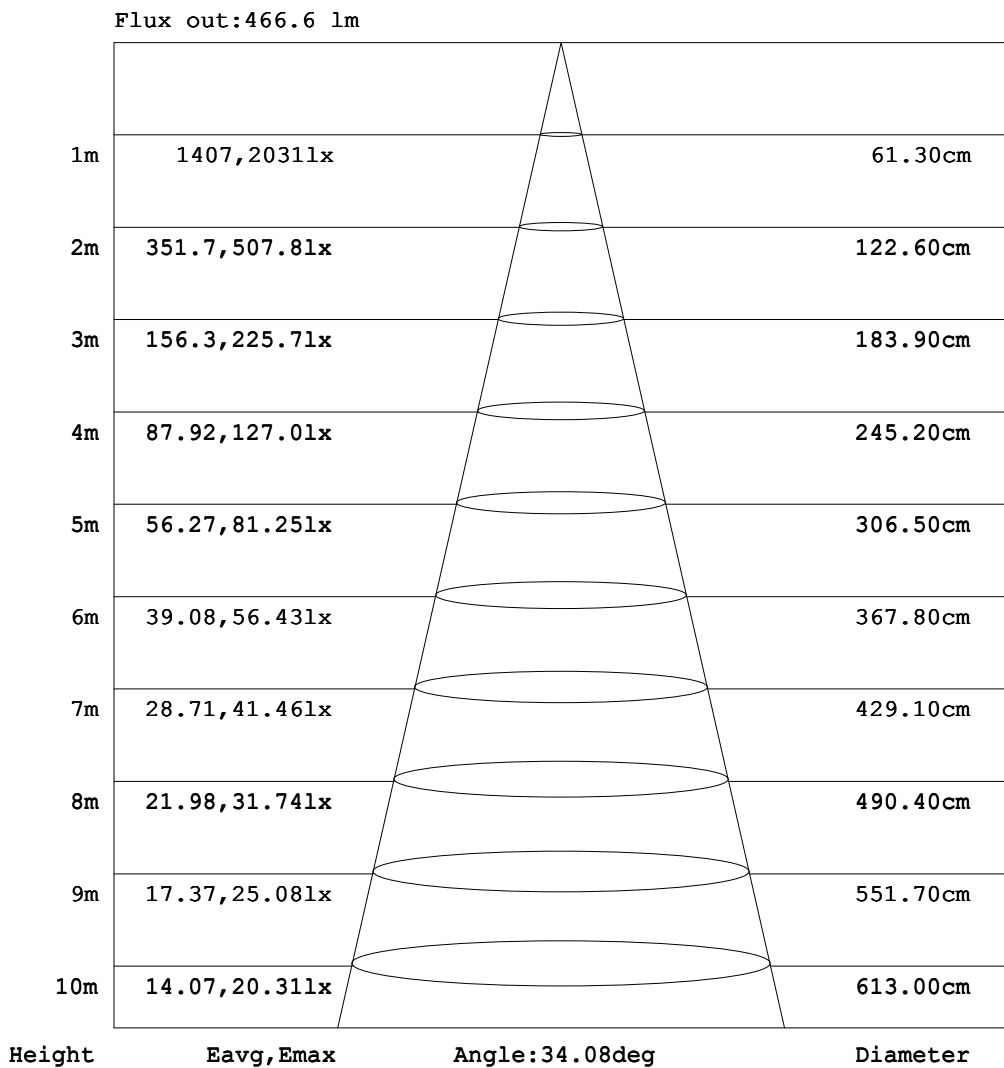

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-27

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.06V I:1.312A P:11.39W PF:0.7199 Freq:59.99Hz Lamp Flux:728.795x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot light	CW WEIGHT:
SPEC.:12W 5700K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWN-LIGHT SHROUD

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.44	1.35	2.71	4.40	6.20	7.80	9.02	9.91	10.7	10.9
-170	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.05	0.11	0.53	1.40	2.73	4.40	6.23	7.94	9.32	10.3	10.8	11.3
-160	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.08	0.16	0.41	1.08	2.09	3.43	4.95	6.52	7.93	9.12	10.0	10.6
-150	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.07	0.16	0.29	0.59	1.19	2.02	3.02	4.10	5.14	6.05	6.77	7.22
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.06	0.11	0.19	0.32	0.53	0.87	1.34	1.89	2.43	2.93	3.35	3.63
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.06	0.10	0.16	0.24	0.36	0.48	0.64	0.82	1.00	1.15	1.27
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.06	0.08	0.12	0.17	0.21	0.26	0.30	0.33	0.35
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.03	0.04	0.05
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.08	0.09	0.12	0.13	0.13	0.14	0.13	0.11	0.09	0.06	0.03	0.00
-60	0.00	0.00	0.00	0.00	0.06	0.11	0.18	0.23	0.27	0.33	0.34	0.33	0.33	0.31	0.26	0.22	0.15	0.08	0.00
-50	0.00	0.00	0.00	0.04	0.13	0.23	0.33	0.44	0.50	0.58	0.62	0.65	0.63	0.59	0.52	0.43	0.30	0.16	0.00
-40	0.00	0.00	0.00	0.12	0.24	0.37	0.54	0.65	0.81	0.93	1.01	1.08	1.24	1.48	1.75	1.79	1.49	0.86	0.00
-30	0.00	0.00	0.00	0.15	0.35	0.54	0.71	0.94	1.15	1.36	1.75	2.78	4.48	6.78	9.99	13.3	13.7	9.20	0.16
-20	0.00	0.00	0.03	0.22	0.42	0.67	0.92	1.23	1.52	2.11	4.02	7.87	16.5	36.7	75.0	182	367	492	520
-10	0.00	0.00	0.07	0.26	0.52	0.77	1.11	1.46	1.92	3.39	7.60	17.9	51.6	148	435	840	1294	1595	1739
0	0.00	0.00	0.08	0.28	0.58	0.85	1.21	1.64	2.26	4.42	10.4	28.1	89.4	283	684	1211	1619	1855	1998
10	0.00	0.02	0.12	0.34	0.67	1.09	1.84	3.06	5.01	9.01	17.7	35.8	84.3	217	508	930	1352	1623	1738
20	0.00	0.04	0.12	0.38	0.69	1.23	2.12	3.75	6.42	10.8	18.9	33.0	58.2	107	199	356	547	710	782
30	0.00	0.05	0.13	0.37	0.71	1.19	2.02	3.51	6.05	9.98	15.8	25.0	38.6	57.7	83.6	116	152	184	204
40	0.00	0.07	0.16	0.39	0.65	1.02	1.66	2.71	4.46	7.20	11.2	16.4	23.2	31.9	42.3	54.0	65.7	76.3	84.3
50	0.00	0.08	0.18	0.34	0.57	0.85	1.25	1.85	2.77	4.16	6.09	8.70	12.0	16.0	20.3	24.8	29.1	32.9	35.8
60	0.00	0.09	0.19	0.31	0.51	0.73	0.99	1.28	1.65	2.21	2.88	3.77	4.89	6.15	7.53	8.94	10.3	11.4	12.3
70	0.00	0.10	0.20	0.31	0.44	0.58	0.79	0.99	1.18	1.41	1.64	1.87	2.17	2.44	2.75	3.07	3.38	3.65	3.88
80	0.00	0.10	0.20	0.31	0.42	0.53	0.66	0.78	0.91	1.05	1.20	1.34	1.49	1.63	1.79	1.94	2.08	2.22	2.35
90	0.00	0.10	0.19	0.29	0.39	0.49	0.58	0.68	0.78	0.88	0.97	1.07	1.17	1.26	1.36	1.46	1.56	1.65	1.75
100	0.00	0.09	0.18	0.27	0.35	0.42	0.49	0.56	0.63	0.69	0.75	0.81	0.87	0.93	0.99	1.05	1.12	1.18	1.25
110	0.00	0.09	0.17	0.23	0.30	0.35	0.40	0.44	0.48	0.52	0.54	0.58	0.61	0.64	0.68	0.72	0.75	0.80	0.84
120	0.00	0.08	0.14	0.20	0.24	0.28	0.31	0.34	0.36	0.37	0.38	0.38	0.41	0.42	0.43	0.42	0.44	0.46	0.49
130	0.00	0.07	0.12	0.16	0.20	0.22	0.24	0.24	0.24	0.25	0.24	0.23	0.21	0.21	0.19	0.18	0.18	0.19	0.20
140	0.00	0.06	0.10	0.13	0.15	0.16	0.17	0.17	0.16	0.14	0.13	0.11	0.13	0.21	0.31	0.44	0.54	0.63	0.61
150	0.00	0.04	0.07	0.09	0.11	0.11	0.12	0.11	0.09	0.07	0.12	0.34	0.74	1.28	1.92	2.54	3.02	3.29	3.30
160	0.00	0.03	0.05	0.06	0.07	0.07	0.07	0.06	0.05	0.12	0.50	1.20	2.19	3.40	4.61	5.68	6.50	6.95	7.02
170	0.00	0.01	0.02	0.03	0.03	0.03	0.03	0.03	0.02	0.32	1.03	2.18	3.68	5.33	6.87	8.10	8.90	9.29	9.31
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.44	1.35	2.71	4.40	6.20	7.80	9.02	9.91	10.7	10.9

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-27

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.06V I:1.312A P:11.39W PF:0.7199 Freq:59.99Hz Lamp Flux:728.795x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot light CW	WEIGHT:
SPEC.:12W 5700K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWN-LIGHT SHROUD

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	11.1	10.9	10.5	9.47	7.89	6.03	4.23	2.64	1.40	0.63	0.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-170	11.2	11.0	10.3	9.14	7.49	5.70	3.97	2.48	1.31	0.55	0.12	0.02	0.01	0.00	0.00	0.00	0.00	0.00	
-160	10.3	9.63	8.64	7.36	5.90	4.41	3.03	1.86	0.97	0.39	0.08	0.03	0.01	0.00	0.00	0.00	0.00	0.00	
-150	6.94	6.39	5.63	4.70	3.69	2.69	1.78	1.05	0.51	0.18	0.07	0.04	0.01	0.00	0.00	0.00	0.00	0.00	
-140	3.46	3.14	2.72	2.22	1.68	1.19	0.75	0.41	0.19	0.11	0.06	0.03	0.00	0.00	0.00	0.00	0.00	0.00	
-130	1.19	1.07	0.90	0.72	0.54	0.38	0.24	0.16	0.10	0.06	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.33	0.30	0.26	0.21	0.17	0.12	0.08	0.06	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.04	0.03	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.02	0.03	0.05	0.06	0.06	0.06	0.06	0.04	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.06	0.11	0.16	0.19	0.22	0.23	0.23	0.22	0.19	0.15	0.10	0.04	0.00	0.00	0.00	0.00	0.00	0.00	
-50	0.13	0.26	0.36	0.45	0.50	0.51	0.50	0.47	0.41	0.35	0.27	0.18	0.09	0.01	0.00	0.00	0.00	0.00	
-40	0.71	1.20	1.38	1.27	1.11	0.99	0.93	0.85	0.73	0.61	0.47	0.34	0.21	0.07	0.00	0.00	0.00	0.00	
-30	9.66	14.1	12.9	9.32	6.01	3.56	2.02	1.40	1.15	0.93	0.72	0.51	0.33	0.16	0.01	0.00	0.00	0.00	
-20	517	398	202	82.7	37.5	15.4	6.66	2.92	1.69	1.30	0.96	0.67	0.44	0.23	0.05	0.00	0.00	0.00	
-10	1690	1458	1001	508	168	52.9	16.8	6.11	2.54	1.64	1.20	0.83	0.53	0.28	0.07	0.00	0.00	0.00	
0	2041	1929	1530	864	327	94.6	26.0	8.69	3.22	1.88	1.35	0.93	0.58	0.31	0.08	0.00	0.00	0.00	
10	1718	1516	1091	581	236	85.6	34.7	16.2	8.16	4.73	2.79	1.57	0.86	0.43	0.15	0.05	0.02	0.00	
20	735	578	376	207	107	57.1	31.8	17.8	10.4	6.20	3.49	1.88	1.00	0.50	0.20	0.09	0.04	0.00	
30	184	152	116	82.9	56.9	37.6	24.2	15.5	9.77	5.84	3.29	1.82	0.97	0.52	0.23	0.13	0.05	0.00	
40	76.2	65.4	53.5	41.8	31.5	23.0	16.2	11.0	7.00	4.26	2.54	1.47	0.85	0.48	0.27	0.16	0.07	0.00	
50	32.9	29.0	24.7	20.2	15.9	11.9	8.55	5.94	4.00	2.62	1.68	1.10	0.71	0.45	0.30	0.18	0.08	0.00	
60	11.4	10.2	8.88	7.46	6.07	4.80	3.67	2.76	2.06	1.53	1.15	0.85	0.62	0.45	0.31	0.19	0.09	0.00	
70	3.64	3.35	3.03	2.70	2.38	2.09	1.80	1.55	1.32	1.10	0.91	0.74	0.58	0.44	0.31	0.20	0.10	0.00	
80	2.22	2.08	1.93	1.78	1.63	1.49	1.34	1.20	1.05	0.91	0.78	0.66	0.53	0.42	0.31	0.20	0.10	0.00	
90	1.65	1.56	1.46	1.36	1.26	1.17	1.07	0.97	0.88	0.78	0.68	0.58	0.49	0.39	0.29	0.19	0.10	0.00	
100	1.18	1.12	1.05	0.99	0.93	0.87	0.81	0.75	0.69	0.63	0.56	0.49	0.42	0.35	0.27	0.18	0.09	0.00	
110	0.80	0.75	0.72	0.68	0.64	0.61	0.58	0.54	0.52	0.48	0.44	0.40	0.35	0.30	0.23	0.17	0.09	0.00	
120	0.46	0.44	0.42	0.43	0.42	0.41	0.38	0.38	0.37	0.36	0.34	0.31	0.28	0.24	0.20	0.14	0.08	0.00	
130	0.23	0.25	0.26	0.27	0.26	0.22	0.23	0.24	0.25	0.24	0.24	0.24	0.22	0.20	0.16	0.12	0.07	0.00	
140	0.74	0.76	0.73	0.64	0.56	0.45	0.33	0.22	0.14	0.16	0.17	0.17	0.16	0.15	0.13	0.10	0.06	0.00	
150	3.47	3.37	3.02	2.52	1.94	1.41	0.93	0.58	0.30	0.11	0.11	0.12	0.11	0.11	0.09	0.07	0.04	0.00	
160	7.22	7.01	6.39	5.46	4.35	3.17	2.13	1.28	0.67	0.28	0.06	0.07	0.07	0.07	0.06	0.05	0.03	0.00	
170	9.63	9.62	9.12	8.07	6.60	4.98	3.41	2.11	1.10	0.47	0.10	0.03	0.03	0.03	0.03	0.02	0.01	0.00	
180	11.1	10.9	10.5	9.47	7.89	6.03	4.23	2.64	1.40	0.63	0.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-27

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: