

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		624.2 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax At 50% of Imax At 90% of Imax	105.7V x 105.6H 79.5V x 79.6H 71.5V x 71.4H
Beam Flux	Total To 10% of Imax To 50% of Imax To 90% of Imax	1000.1 lumens per klm. 933.6 lumens per klm. 803.4 lumens per klm. 664.1 lumens per klm.
	Upward LOR Downward LOR	1.4 % 98.6 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-01-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.12V I:1.215A P:9.989W PF:0.6779 Freq:59.98Hz Lamp Flux:959.795x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot Light	WEIGHT:
SPEC.:12W 3000K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:NON SHROUD

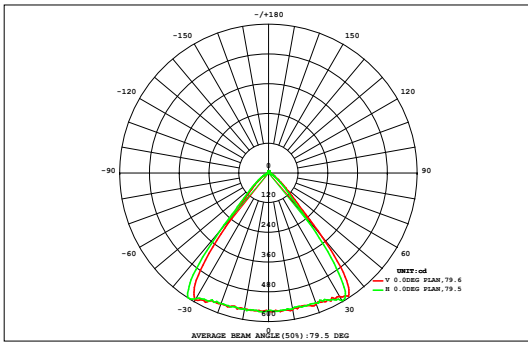

DATA OF LAMP		Eff:96.09lm/W	
MODEL	D3A1-12W-30K-BZ	Imax (cd)	599.1
NOMINAL POWER (W)	12	AVAILABILITY (%)	93.4
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	896.7
NOMINAL FLUX (lm)	959.795	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	959.8
TEST VOLTAGE (V)	12	θ @50% (H, V)	80,79DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.00
80	0.00	0.00	0.00	0.01	0.02	0.04	0.07	0.09	0.10	0.10	0.10	0.08	0.05	0.03	0.01	0.00	0.00	0.00	0.71	0.00
70	0.00	0.00	0.01	0.04	0.11	0.20	0.30	0.39	0.45	0.46	0.41	0.33	0.22	0.13	0.06	0.02	0.00	0.00	3.14	0.00
60	0.00	0.00	0.03	0.12	0.28	0.51	0.81	1.10	1.29	1.31	1.16	0.88	0.57	0.32	0.14	0.05	0.01	0.00	8.57	0.46
50	0.00	0.01	0.07	0.22	0.54	1.09	1.90	2.82	3.55	3.66	3.02	2.08	1.23	0.63	0.27	0.09	0.01	0.00	21.2	16.5
40	0.00	0.01	0.10	0.36	0.94	2.15	4.93	10.2	13.6	13.8	11.0	5.86	2.50	1.10	0.43	0.13	0.02	0.00	67.1	64.4
30	0.00	0.02	0.14	0.51	1.47	4.43	12.8	16.9	17.3	17.3	16.9	14.0	5.71	1.77	0.62	0.18	0.03	0.00	110	108
20	0.00	0.03	0.17	0.64	2.05	8.51	15.9	16.5	16.9	16.9	16.5	15.9	10.5	2.59	0.79	0.22	0.04	0.00	124	122
10	0.00	0.03	0.19	0.73	2.48	10.9	15.8	16.4	16.9	16.9	16.4	15.7	12.8	3.39	0.91	0.24	0.04	0.00	130	128
0	0.00	0.03	0.19	0.73	2.51	11.0	15.8	16.5	16.9	16.9	16.4	15.7	12.9	3.42	0.92	0.24	0.04	0.00	130	129
-10	0.00	0.03	0.17	0.66	2.11	8.91	15.9	16.6	17.0	17.0	16.5	15.9	10.9	2.65	0.81	0.22	0.04	0.00	125	124
-20	0.00	0.02	0.14	0.52	1.54	4.87	13.6	17.0	17.3	17.3	17.0	14.7	6.14	1.83	0.63	0.18	0.03	0.00	113	111
-30	0.00	0.02	0.11	0.37	0.99	2.31	5.70	11.7	15.2	15.4	12.5	6.63	2.66	1.16	0.44	0.14	0.02	0.00	75.4	72.7
-40	0.00	0.01	0.07	0.24	0.58	1.18	2.10	3.23	4.28	4.39	3.43	2.28	1.32	0.66	0.28	0.09	0.01	0.00	24.1	19.9
-50	0.00	0.00	0.04	0.13	0.30	0.56	0.90	1.24	1.48	1.50	1.30	0.96	0.62	0.34	0.15	0.05	0.01	0.00	9.58	1.57
-60	0.00	0.00	0.01	0.05	0.12	0.22	0.34	0.45	0.53	0.53	0.47	0.37	0.25	0.14	0.06	0.02	0.00	0.00	3.59	0.00
-70	0.00	0.00	0.00	0.01	0.03	0.05	0.08	0.11	0.13	0.13	0.12	0.09	0.06	0.04	0.02	0.01	0.00	0.00	0.89	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.07	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Φ t	0.00	0.21	1.46	5.34	16.1	57.0	107	131	143	144	133	111	68.4	20.2	6.56	1.87	0.31	0.01	947	---
Φ a	0.00	0.00	0.00	0.20	11.5	53.4	104	128	140	140	130	108	64.9	16.1	1.19	0.00	0.00	0.00	---	897


one-half-peak spread: U:7.5,D:9.1 , L:8.6,R:8.1 NEMA Beam Type: Type 6

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-01-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.12V I:1.215A P:9.989W PF:0.6779 Freq:59.98Hz Lamp Flux:959.795x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot Light	WEIGHT:
SPEC.:12W 3000K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:NON SHROUD

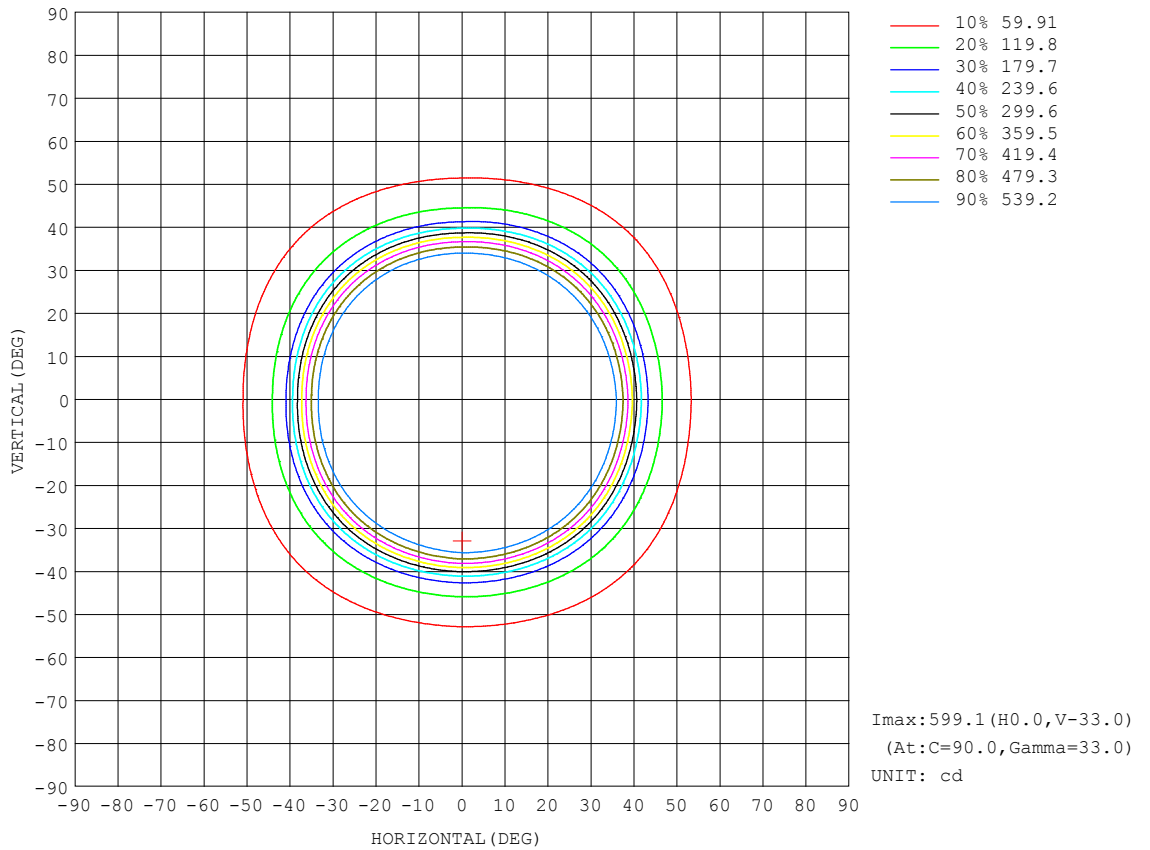


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-01-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.12V I:1.215A P:9.989W PF:0.6779 Freq:59.98Hz Lamp Flux:959.795x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot Light	WEIGHT:
SPEC.:12W 3000K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:NON SHROUD

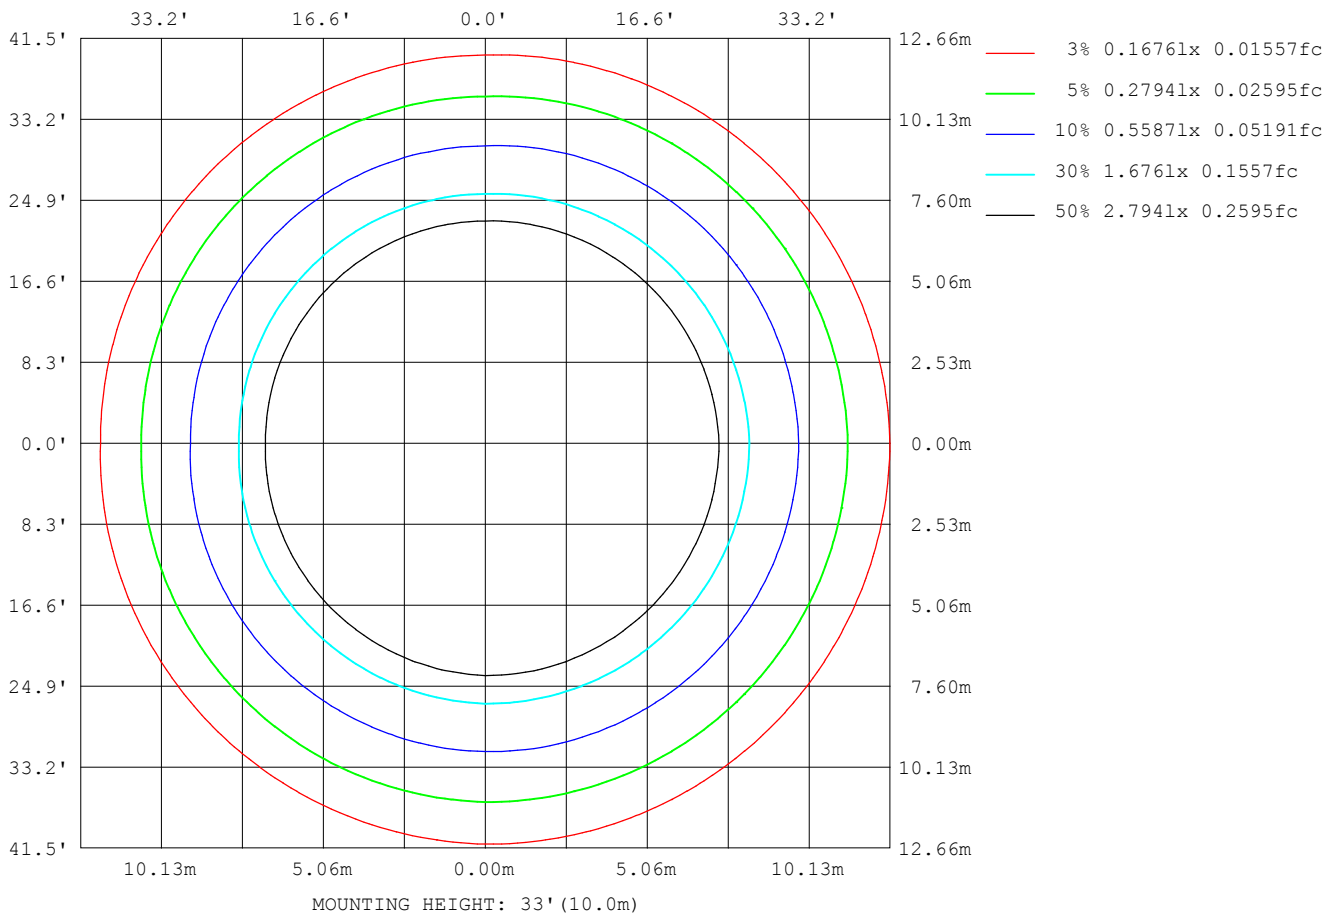

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-01-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

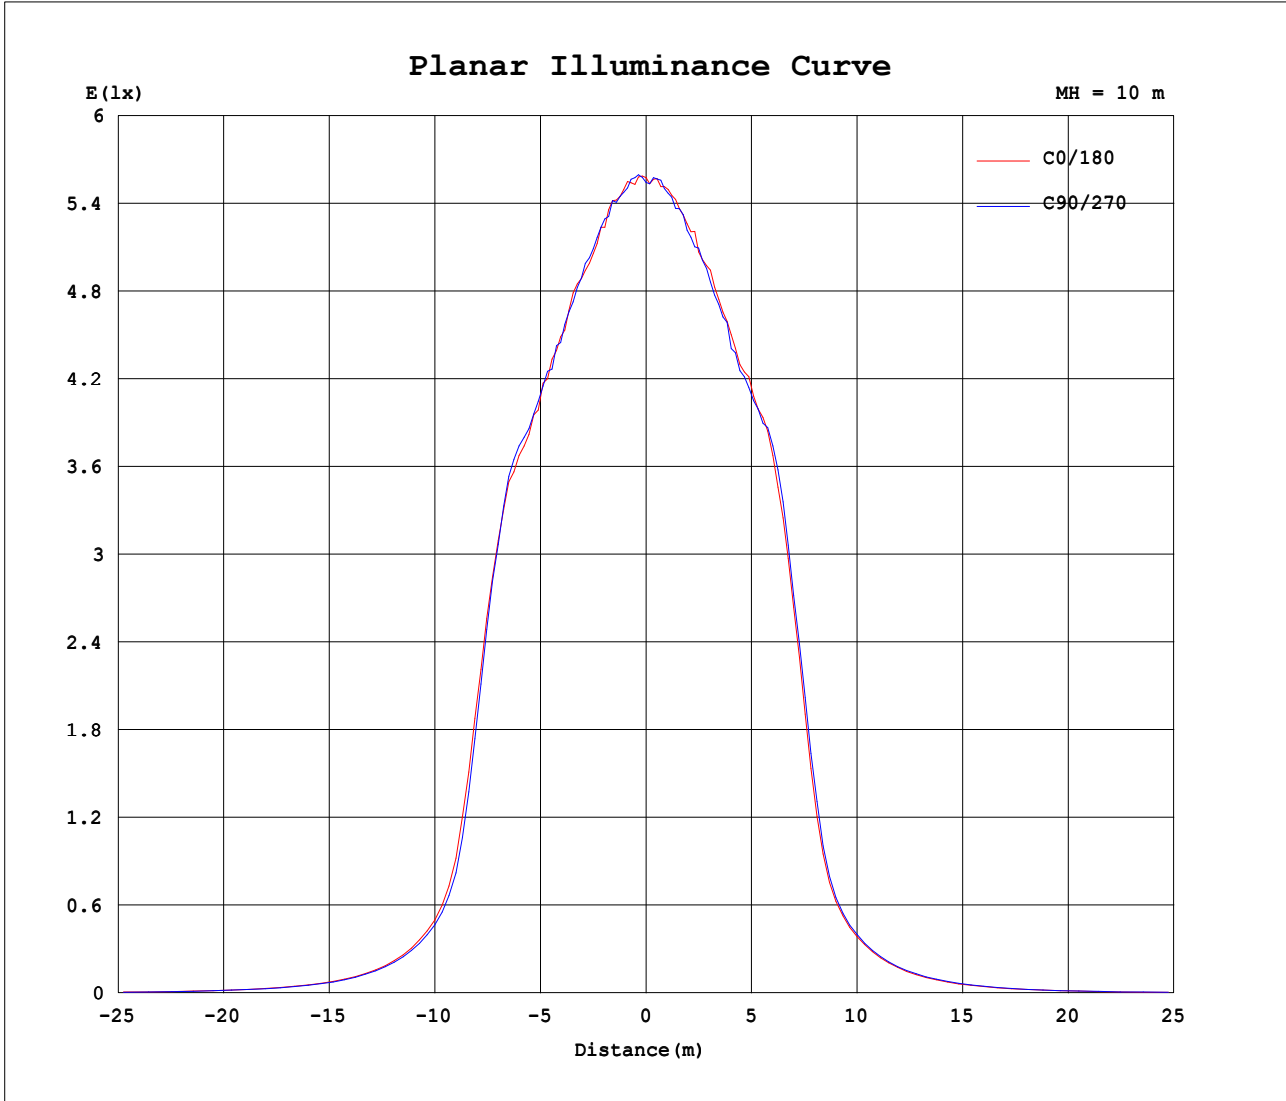


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-01-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.12V I:1.215A P:9.989W PF:0.6779 Freq:59.98Hz Lamp Flux:959.795x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot Light	WEIGHT:
SPEC.:12W 3000K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:NON SHROUD

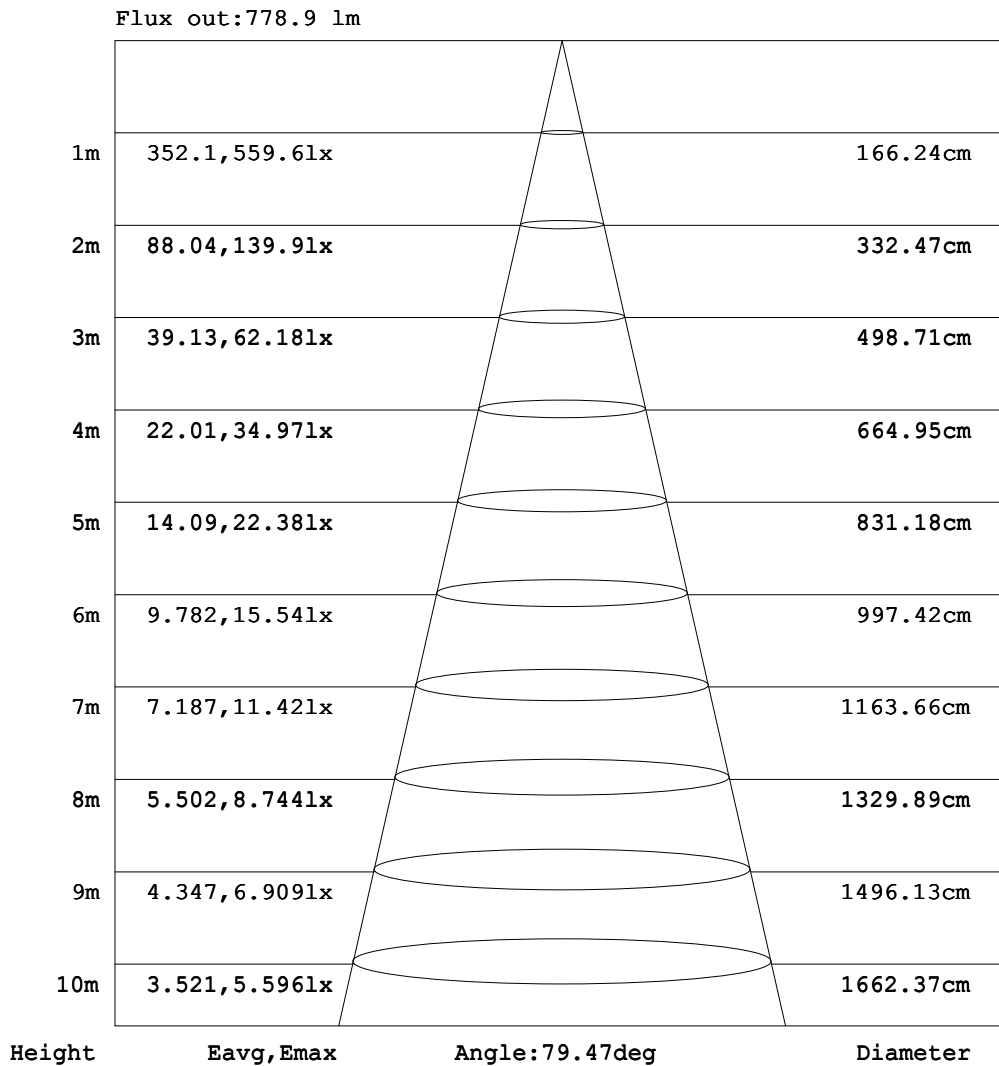

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-01-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.12V I:1.215A P:9.989W PF:0.6779 Freq:59.98Hz Lamp Flux:959.795x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot Light	WEIGHT:
SPEC.:12W 3000K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:NON SHROUD

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.02	0.27	0.75	1.42	2.16	2.97	3.75	4.50	5.09	5.71	6.54	7.35	8.03	8.40	8.50
-170	0.00	0.00	0.00	0.00	0.02	0.26	0.73	1.38	2.12	2.90	3.68	4.42	5.04	5.60	6.28	7.01	7.64	8.05	8.21
-160	0.00	0.00	0.00	0.00	0.02	0.21	0.60	1.18	1.85	2.57	3.29	3.99	4.65	5.17	5.61	6.03	6.45	6.75	6.91
-150	0.00	0.00	0.00	0.00	0.02	0.12	0.40	0.84	1.41	2.01	2.63	3.24	3.82	4.35	4.82	5.18	5.44	5.63	5.74
-140	0.00	0.00	0.00	0.00	0.01	0.04	0.20	0.48	0.87	1.33	1.81	2.29	2.75	3.17	3.56	3.86	4.13	4.30	4.40
-130	0.00	0.00	0.00	0.00	0.00	0.02	0.06	0.18	0.38	0.64	0.96	1.28	1.61	1.91	2.18	2.41	2.58	2.71	2.78
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.05	0.09	0.18	0.30	0.45	0.61	0.78	0.94	1.07	1.19	1.27	1.32
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.03	0.07	0.10	0.14	0.17	0.20	0.24	0.27	0.29
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.01	0.02	0.04	0.06	0.16	0.24	0.31	0.42	0.53	0.66	0.78	0.91	1.02	1.10	1.16	1.20
-70	0.00	0.00	0.01	0.04	0.21	0.44	0.83	1.35	2.01	2.80	3.66	4.62	5.55	6.47	7.25	8.00	8.65	9.10	9.34
-60	0.00	0.00	0.02	0.27	0.78	1.62	2.90	4.61	6.60	9.01	11.6	14.3	17.1	20.0	22.6	25.3	27.2	28.5	29.2
-50	0.00	0.00	0.17	0.67	1.80	3.72	6.36	9.87	14.0	19.1	25.1	32.2	39.9	48.5	57.3	65.3	72.3	77.5	79.9
-40	0.00	0.00	0.27	1.22	3.20	6.35	10.8	16.7	24.3	34.6	47.8	64.5	86.0	111	140	181	234	283	306
-30	0.00	0.00	0.43	1.83	4.74	9.26	15.6	24.5	37.4	56.0	82.9	121	194	358	509	580	592	589	585
-20	0.00	0.00	0.58	2.41	6.03	11.7	19.9	32.5	51.5	81.5	128	256	486	583	578	569	562	562	561
-10	0.00	0.00	0.69	2.78	6.92	13.4	23.0	38.2	62.4	102	184	436	580	576	564	561	556	559	556
0	0.00	0.00	0.72	2.89	7.17	13.9	23.9	39.9	66.2	109	211	480	591	571	561	557	557	558	558
10	0.00	0.00	0.68	2.76	6.85	13.2	22.8	37.7	61.4	100	177	423	579	576	562	559	556	553	557
20	0.00	0.00	0.57	2.35	5.91	11.5	19.4	31.8	50.0	78.7	122	231	461	580	580	567	558	561	557
30	0.00	0.00	0.41	1.77	4.58	8.98	15.2	23.6	35.9	53.4	78.4	113	170	308	465	557	587	594	595
40	0.00	0.00	0.26	1.15	3.05	6.07	10.4	15.9	23.1	32.6	44.8	59.9	79.0	100	124	152	183	213	224
50	0.00	0.00	0.16	0.62	1.67	3.48	5.96	9.25	13.1	17.8	23.3	29.7	36.4	44.0	51.2	58.0	63.4	66.9	68.2
60	0.00	0.00	0.00	0.23	0.69	1.46	2.63	4.17	6.00	8.18	10.5	12.9	15.5	17.9	20.0	22.2	23.7	24.7	25.1
70	0.00	0.00	0.00	0.02	0.17	0.36	0.70	1.13	1.69	2.36	3.11	3.91	4.67	5.42	6.11	6.69	7.14	7.41	7.52
80	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.10	0.16	0.20	0.28	0.36	0.44	0.52	0.60	0.67	0.72	0.75	0.76
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.08	0.17	0.28	0.35	0.47	0.56	0.62	0.64	0.65
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.20	0.38	0.65	0.91	1.19	1.46	1.64	1.82	1.96	2.02	2.03
140	0.00	0.00	0.00	0.00	0.00	0.00	0.10	0.34	0.66	1.07	1.53	1.95	2.36	2.77	3.06	3.33	3.50	3.62	3.65
150	0.00	0.00	0.00	0.00	0.00	0.07	0.31	0.70	1.23	1.79	2.38	2.96	3.48	3.94	4.36	4.62	4.82	4.92	4.93
160	0.00	0.00	0.00	0.00	0.00	0.16	0.52	1.07	1.71	2.41	3.11	3.77	4.39	4.86	5.25	5.67	6.07	6.33	6.42
170	0.00	0.00	0.00	0.00	0.01	0.24	0.68	1.32	2.05	2.83	3.58	4.31	4.90	5.44	6.12	6.83	7.43	7.81	7.94
180	0.00	0.00	0.00	0.00	0.02	0.27	0.75	1.42	2.16	2.97	3.75	4.50	5.09	5.71	6.54	7.35	8.03	8.40	8.51

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-01-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.12V I:1.215A P:9.989W PF:0.6779 Freq:59.98Hz Lamp Flux:959.795x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot Light	WEIGHT:
SPEC.:12W 3000K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:NON SHROUD

Table--2

UNIT: cd

H (DEG) \ V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	8.42	8.17	7.60	6.83	6.16	5.67	5.07	4.29	3.47	2.68	1.91	1.22	0.61	0.28	0.00	0.00	0.00	0.00
-170	8.11	7.75	7.18	6.53	6.01	5.54	4.91	4.13	3.35	2.56	1.83	1.16	0.59	0.24	0.00	0.00	0.00	0.00
-160	6.80	6.55	6.22	5.90	5.54	5.03	4.38	3.70	2.97	2.24	1.58	0.97	0.49	0.16	0.00	0.00	0.00	0.00
-150	5.69	5.57	5.36	5.05	4.62	4.11	3.55	2.97	2.36	1.77	1.21	0.72	0.35	0.12	0.00	0.00	0.00	0.00
-140	4.35	4.21	3.99	3.73	3.37	2.99	2.54	2.09	1.63	1.19	0.78	0.42	0.17	0.01	0.00	0.00	0.00	0.00
-130	2.75	2.65	2.51	2.31	2.08	1.82	1.50	1.20	0.93	0.61	0.36	0.17	0.03	0.00	0.00	0.00	0.00	0.00
-120	1.30	1.24	1.16	1.05	0.93	0.76	0.60	0.44	0.32	0.18	0.09	0.01	0.00	0.00	0.00	0.00	0.00	0.00
-110	0.28	0.27	0.24	0.21	0.18	0.14	0.09	0.03	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	1.20	1.17	1.11	1.03	0.93	0.82	0.69	0.58	0.48	0.39	0.30	0.23	0.17	0.12	0.07	0.04	0.01	0.00
-70	9.25	8.94	8.42	7.77	7.06	6.19	5.29	4.35	3.45	2.61	1.86	1.23	0.76	0.45	0.26	0.12	0.04	0.00
-60	28.9	28.0	26.4	23.9	21.4	18.7	15.9	13.1	10.4	7.93	5.72	3.86	2.35	1.24	0.58	0.25	0.07	0.00
-50	78.8	74.7	68.5	61.0	52.4	43.9	35.7	28.4	21.9	16.4	11.8	7.98	4.96	2.66	1.16	0.41	0.11	0.00
-40	293	251	198	154	122	95.6	72.9	54.4	39.8	28.6	19.8	13.2	8.18	4.47	1.96	0.62	0.15	0.00
-30	588	594	594	546	425	244	141	96.5	65.8	44.5	29.5	19.0	11.6	6.34	2.83	0.88	0.19	0.00
-20	561	561	567	575	589	548	349	160	97.9	62.4	39.4	24.4	14.8	8.06	3.60	1.11	0.23	0.00
-10	558	555	563	562	567	586	528	275	128	77.4	47.6	28.9	17.0	9.27	4.16	1.26	0.25	0.00
0	561	561	554	563	564	576	563	336	142	83.8	50.8	30.3	17.8	9.70	4.35	1.32	0.26	0.00
10	553	556	560	561	567	585	516	267	126	76.4	47.2	28.6	16.9	9.20	4.13	1.26	0.25	0.00
20	561	558	565	577	586	523	324	154	95.1	60.9	38.6	24.0	14.5	7.94	3.55	1.09	0.23	0.00
30	593	589	571	503	375	220	134	92.0	63.2	43.0	28.6	18.5	11.4	6.19	2.76	0.86	0.19	0.00
40	223	201	169	138	112	88.6	68.2	51.5	37.9	27.4	19.0	12.7	7.90	4.32	1.90	0.61	0.15	0.00
50	68.2	65.8	61.2	54.9	47.9	40.4	33.2	26.6	20.6	15.5	11.2	7.58	4.72	2.53	1.11	0.40	0.11	0.00
60	25.1	24.5	23.3	21.3	19.3	17.0	14.5	12.0	9.59	7.33	5.29	3.58	2.19	1.16	0.54	0.24	0.07	0.00
70	7.56	7.42	7.10	6.63	6.01	5.30	4.58	3.80	3.01	2.29	1.64	1.09	0.69	0.41	0.23	0.11	0.03	0.00
80	0.78	0.78	0.77	0.73	0.66	0.60	0.52	0.45	0.37	0.31	0.24	0.18	0.14	0.10	0.06	0.03	0.01	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.02	0.03	0.03	0.04	0.04	0.04	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.68	0.68	0.65	0.58	0.50	0.42	0.32	0.22	0.17	0.09	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	2.05	2.03	1.93	1.78	1.63	1.40	1.13	0.89	0.66	0.42	0.24	0.12	0.01	0.00	0.00	0.00	0.00	0.00
140	3.66	3.59	3.46	3.23	2.97	2.60	2.20	1.82	1.38	0.98	0.64	0.32	0.13	0.00	0.00	0.00	0.00	0.00
150	4.99	4.95	4.81	4.59	4.21	3.77	3.27	2.72	2.14	1.59	1.07	0.62	0.29	0.10	0.00	0.00	0.00	0.00
160	6.38	6.17	5.85	5.54	5.22	4.77	4.16	3.51	2.82	2.11	1.48	0.90	0.45	0.15	0.00	0.00	0.00	0.00
170	7.87	7.54	7.01	6.37	5.85	5.39	4.80	4.03	3.28	2.49	1.78	1.12	0.57	0.23	0.00	0.00	0.00	0.00
180	8.42	8.17	7.60	6.83	6.16	5.67	5.07	4.29	3.47	2.68	1.91	1.22	0.61	0.28	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2022-01-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: