

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	375.1 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	152.1V x 163.1H
	At 50% of Imax	105.2V x 109.2H
	At 90% of Imax	44.9V x 44.9H

Beam Flux	Total	1000.0 lumens per klm.
	To 10% of Imax	986.2 lumens per klm.
	To 50% of Imax	715.3 lumens per klm.
	To 90% of Imax	170.4 lumens per klm.

Upward LOR	0.0 %
Downward LOR	100.0 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-06-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.08V I:0.1726A P:1.997W PF:0.9584 Freq:59.97Hz Lamp Flux:78.535x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:LumienARC	WEIGHT:
SPEC.:2W 3000K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAA-027

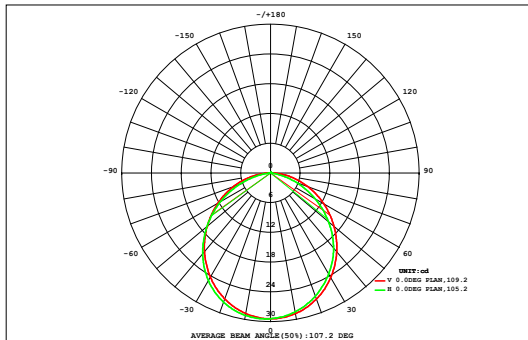

DATA OF LAMP		Eff:39.32lm/W	
MODEL	L3S1-1-2W-30K-WH	Imax(cd)	29.46
NOMINAL POWER(W)	2	AVAILABILITY(%)	98.6
RATED VOLTAGE(V)	12	Avai. FLUX(lm)	77.43
NOMINAL FLUX(lm)	78.535	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	78.54
TEST VOLTAGE(V)	12	θ @50%(H,V)	109,105DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.84	0.47
80	0.00	0.01	0.04	0.07	0.12	0.16	0.20	0.23	0.24	0.24	0.23	0.20	0.16	0.12	0.08	0.04	0.01	0.00	2.14	2.07
70	0.00	0.02	0.06	0.12	0.19	0.26	0.32	0.37	0.39	0.39	0.37	0.32	0.26	0.19	0.12	0.06	0.02	0.00	3.44	3.41
60	0.00	0.03	0.08	0.16	0.25	0.35	0.43	0.50	0.53	0.53	0.50	0.43	0.35	0.25	0.16	0.08	0.03	0.00	4.67	4.65
50	0.00	0.03	0.10	0.20	0.31	0.42	0.53	0.61	0.66	0.66	0.61	0.53	0.42	0.31	0.20	0.10	0.04	0.00	5.73	5.71
40	0.00	0.04	0.11	0.22	0.35	0.49	0.61	0.70	0.75	0.75	0.70	0.61	0.48	0.35	0.22	0.12	0.04	0.01	6.57	6.56
30	0.01	0.04	0.12	0.24	0.38	0.53	0.67	0.77	0.83	0.83	0.77	0.67	0.53	0.38	0.24	0.13	0.04	0.01	7.20	7.19
20	0.01	0.05	0.13	0.25	0.40	0.56	0.70	0.81	0.87	0.87	0.81	0.70	0.56	0.40	0.25	0.13	0.05	0.01	7.57	7.56
10	0.01	0.05	0.13	0.25	0.40	0.56	0.71	0.82	0.88	0.88	0.82	0.71	0.56	0.40	0.25	0.13	0.05	0.01	7.65	7.64
0	0.01	0.04	0.13	0.25	0.39	0.55	0.69	0.80	0.86	0.86	0.80	0.69	0.55	0.39	0.25	0.13	0.05	0.01	7.42	7.41
-10	0.00	0.04	0.12	0.23	0.36	0.51	0.64	0.74	0.80	0.80	0.74	0.64	0.51	0.36	0.23	0.12	0.04	0.01	6.89	6.88
-20	0.00	0.04	0.10	0.20	0.32	0.45	0.56	0.65	0.70	0.70	0.65	0.56	0.45	0.32	0.20	0.10	0.04	0.00	6.06	6.05
-30	0.00	0.03	0.09	0.17	0.27	0.37	0.46	0.54	0.57	0.57	0.54	0.46	0.37	0.27	0.17	0.09	0.03	0.00	4.99	4.97
-40	0.00	0.02	0.06	0.13	0.20	0.28	0.35	0.40	0.43	0.43	0.40	0.35	0.28	0.20	0.13	0.07	0.02	0.00	3.75	3.73
-50	0.00	0.01	0.04	0.08	0.13	0.18	0.22	0.26	0.28	0.28	0.26	0.22	0.18	0.13	0.08	0.04	0.01	0.00	2.42	2.37
-60	0.00	0.01	0.02	0.04	0.06	0.08	0.10	0.11	0.12	0.12	0.11	0.10	0.08	0.06	0.04	0.02	0.01	0.00	1.05	0.74
-70	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.07	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
HORIZONTAL (DEG)																				
Φ t	0.05	0.47	1.35	2.64	4.19	5.80	7.28	8.42	9.02	9.02	8.42	7.28	5.80	4.20	2.65	1.36	0.48	0.06	78	---
Φ a	0.01	0.39	1.29	2.58	4.13	5.74	7.22	8.36	8.96	8.96	8.36	7.22	5.75	4.14	2.59	1.30	0.41	0.01	---	77

one-half-peak spread: U:50.4,D:53.4 , L:52.9,R:54.0


NEMA Beam Type: Type 7

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-06-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.08V I:0.1726A P:1.997W PF:0.9584 Freq:59.97Hz Lamp Flux:78.535x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:LumienARC	WEIGHT:
SPEC.:2W 3000K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAA-027

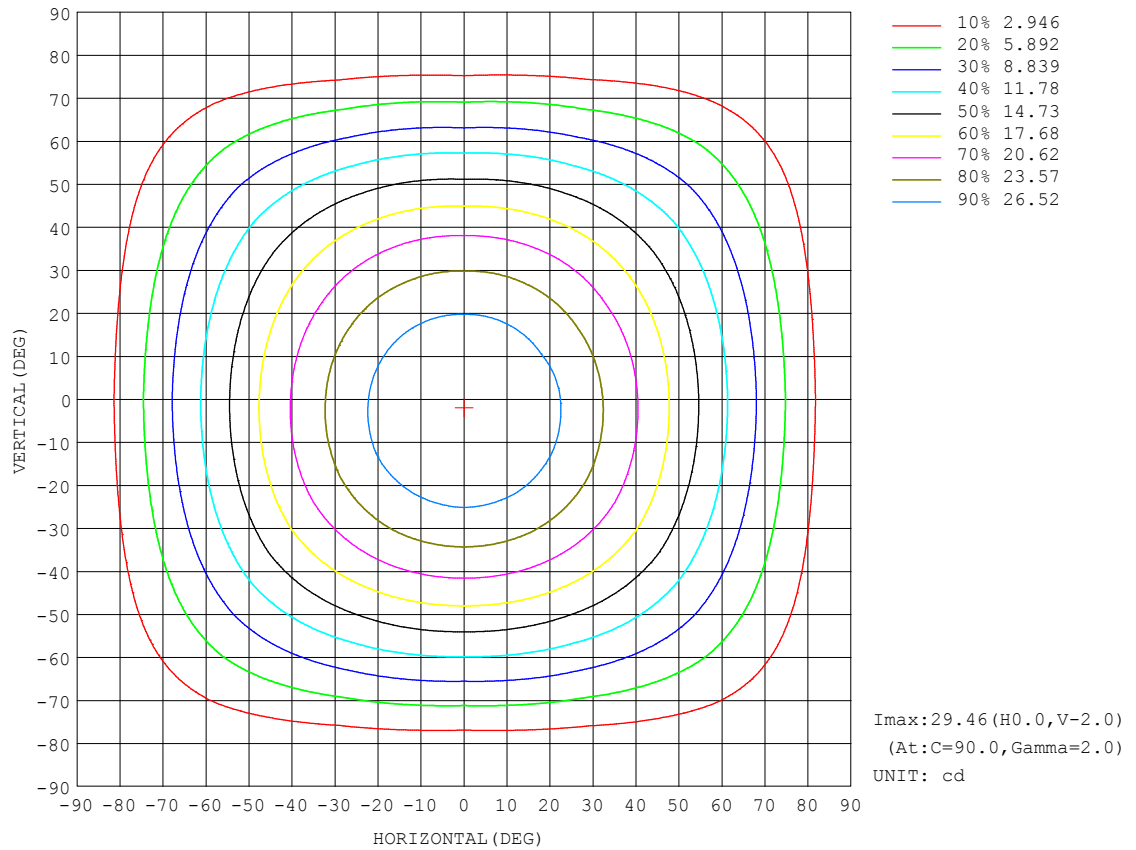


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-06-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.08V I:0.1726A P:1.997W PF:0.9584 Freq:59.97Hz Lamp Flux:78.535x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:LumienARC	WEIGHT:
SPEC.:2W 3000K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAA-027

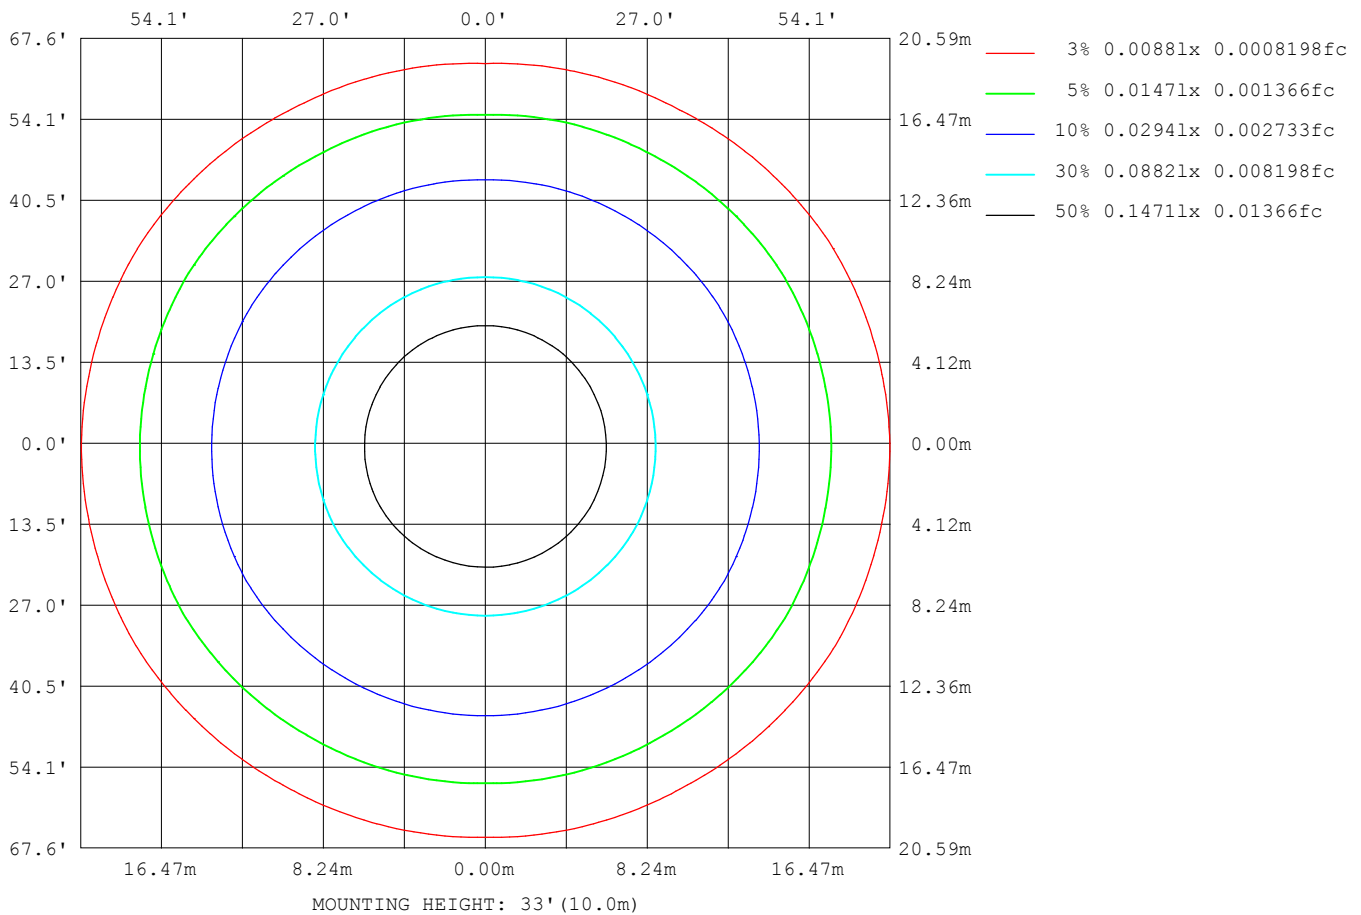

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-06-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

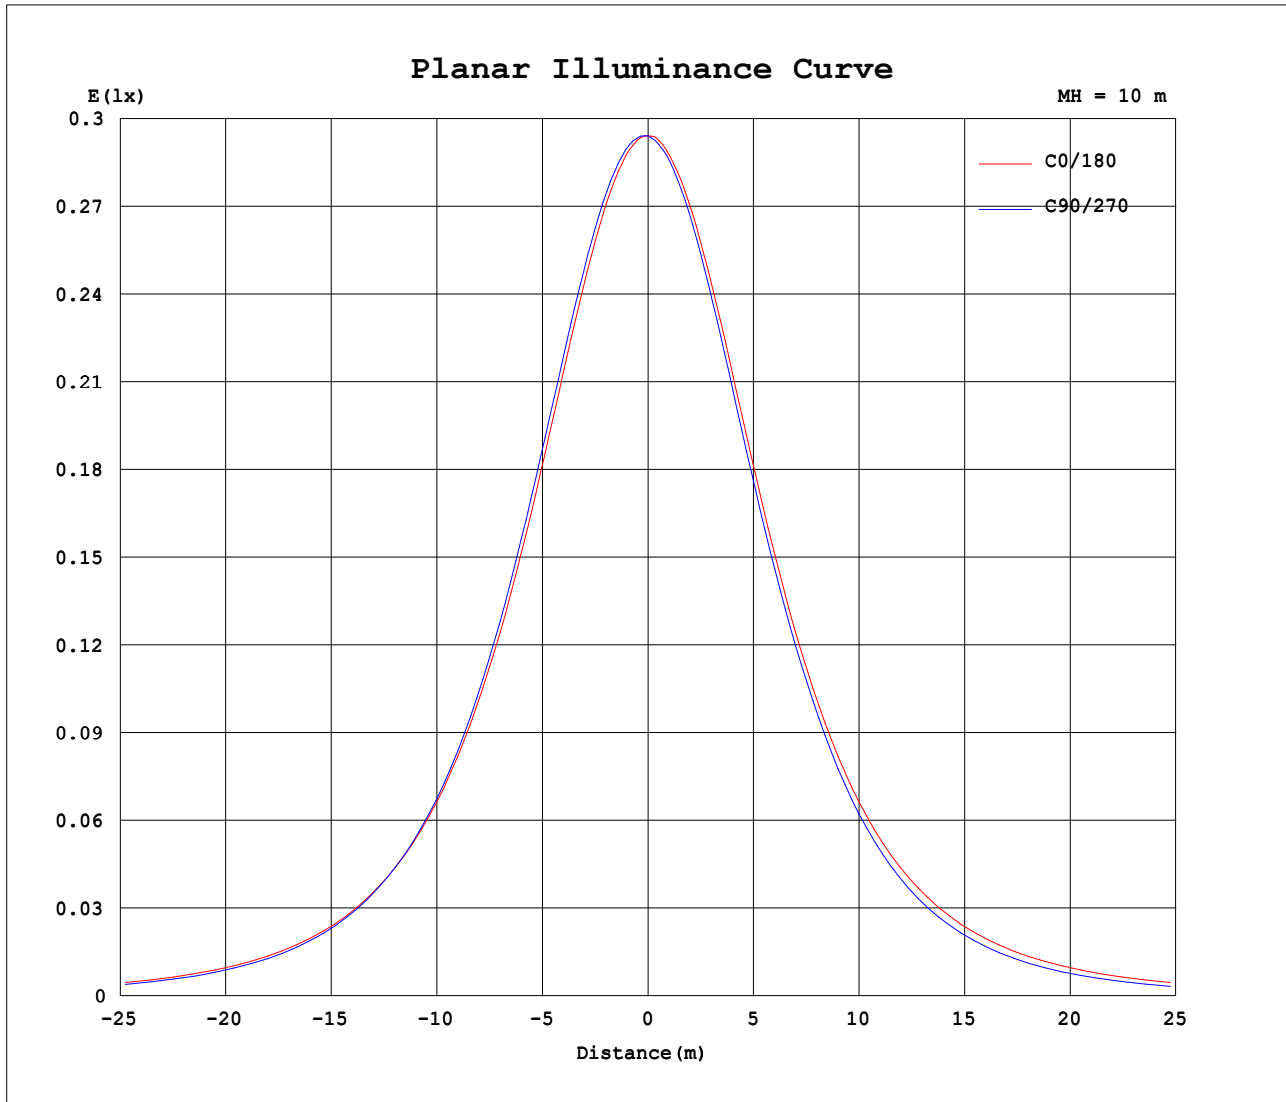


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-06-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.08V I:0.1726A P:1.997W PF:0.9584 Freq:59.97Hz Lamp Flux:78.535x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:LumienARC	WEIGHT:
SPEC.:2W 3000K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAA-027

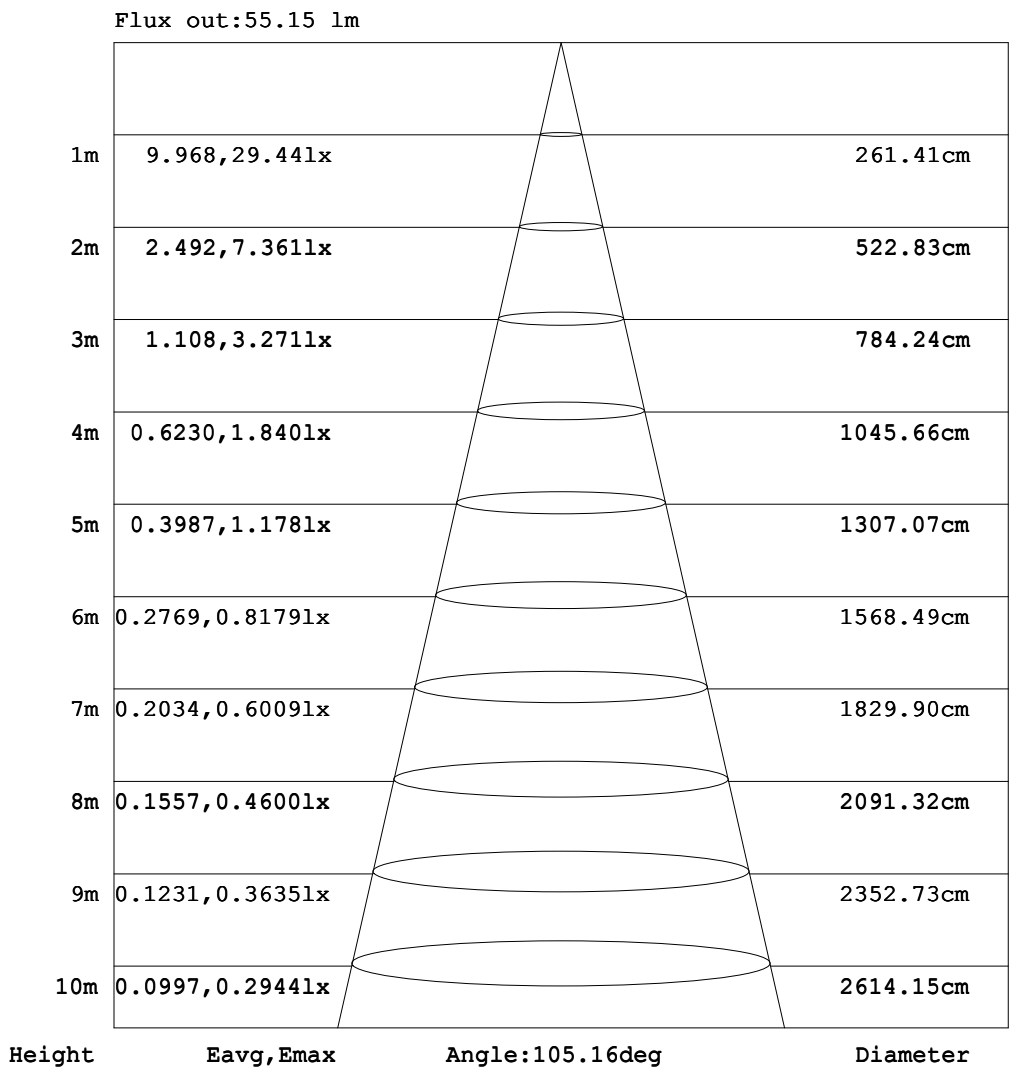

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-06-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.08V I:0.1726A P:1.997W PF:0.9584 Freq:59.97Hz Lamp Flux:78.535x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:LumienARC	WEIGHT:
SPEC.:2W 3000K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAA-027

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.05	0.06	0.08	0.10	0.10
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.04	0.06	0.08	0.10
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.02	0.02	0.05	0.07
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.03
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.14	0.27	0.32	0.36	0.52	0.74	0.89	0.96	1.04	1.08	1.11	1.24	1.34	1.41	1.44	1.43	1.39
-70	0.00	0.18	0.60	1.06	1.64	2.24	2.83	3.38	3.88	4.35	4.78	5.15	5.48	5.81	6.11	6.34	6.48	6.55	6.54
-60	0.00	0.42	1.20	2.12	3.08	4.08	5.08	6.04	6.91	7.73	8.50	9.20	9.83	10.4	10.9	11.3	11.5	11.7	11.7
-50	0.00	0.68	1.82	3.09	4.42	5.77	7.13	8.47	9.73	10.9	12.0	13.0	14.0	14.8	15.5	16.0	16.4	16.7	16.7
-40	0.00	0.91	2.39	3.95	5.60	7.26	8.93	10.6	12.2	13.8	15.2	16.5	17.6	18.7	19.6	20.3	20.9	21.2	21.3
-30	0.00	1.13	2.84	4.67	6.56	8.47	10.4	12.3	14.2	16.0	17.8	19.3	20.7	21.9	23.1	23.9	24.5	24.9	25.1
-20	0.00	1.31	3.19	5.22	7.28	9.38	11.5	13.6	15.6	17.7	19.5	21.3	22.9	24.3	25.4	26.4	27.1	27.6	27.7
-10	0.00	1.43	3.42	5.56	7.73	9.93	12.1	14.3	16.5	18.6	20.6	22.4	24.1	25.6	26.8	27.8	28.6	29.0	29.2
0	0.00	1.49	3.53	5.70	7.90	10.1	12.3	14.5	16.7	18.8	20.8	22.6	24.3	25.8	27.1	28.1	28.8	29.3	29.4
10	0.00	1.42	3.40	5.52	7.67	9.85	12.0	14.2	16.3	18.3	20.2	22.0	23.6	25.0	26.2	27.2	27.9	28.4	28.5
20	0.00	1.29	3.14	5.14	7.17	9.23	11.3	13.3	15.3	17.1	18.9	20.5	22.0	23.3	24.4	25.3	25.9	26.3	26.4
30	0.00	1.11	2.77	4.56	6.40	8.27	10.1	12.0	13.7	15.4	16.9	18.4	19.7	20.8	21.8	22.5	23.1	23.4	23.5
40	0.00	0.90	2.30	3.81	5.39	7.00	8.60	10.2	11.7	13.1	14.4	15.6	16.6	17.6	18.4	19.1	19.5	19.8	19.8
50	0.00	0.68	1.73	2.92	4.19	5.47	6.76	8.03	9.21	10.3	11.3	12.2	13.0	13.7	14.3	14.8	15.1	15.3	15.3
60	0.00	0.42	1.12	1.94	2.83	3.75	4.66	5.57	6.36	7.10	7.78	8.38	8.92	9.37	9.81	10.1	10.3	10.4	10.4
70	0.00	0.18	0.58	0.93	1.40	1.90	2.42	2.93	3.37	3.76	4.12	4.43	4.68	4.96	5.19	5.36	5.47	5.49	5.44
80	0.00	0.00	0.14	0.27	0.29	0.25	0.25	0.46	0.57	0.60	0.66	0.69	0.69	0.78	0.86	0.90	0.91	0.88	0.83
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.04
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.05	0.07	0.09
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.05	0.06	0.08	0.10	0.10

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-06-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.08V I:0.1726A P:1.997W PF:0.9584 Freq:59.97Hz Lamp Flux:78.535x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:LumienARC	WEIGHT:
SPEC.:2W 3000K	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAA-027

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	0.11	0.08	0.09	0.04	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-170	0.08	0.08	0.05	0.05	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-160	0.05	0.04	0.02	0.02	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-150	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	1.44	1.46	1.43	1.37	1.27	1.15	1.13	1.09	1.01	0.94	0.81	0.59	0.41	0.37	0.34	0.24	0.08	0.00	
-70	6.56	6.49	6.35	6.14	5.85	5.52	5.19	4.82	4.41	3.96	3.46	2.93	2.34	1.74	1.16	0.69	0.30	0.00	
-60	11.7	11.6	11.3	10.9	10.4	9.84	9.23	8.53	7.77	6.94	6.08	5.15	4.17	3.19	2.24	1.31	0.54	0.00	
-50	16.7	16.4	16.0	15.5	14.8	14.0	13.0	12.0	10.9	9.77	8.52	7.18	5.84	4.52	3.21	1.95	0.79	0.00	
-40	21.2	20.9	20.4	19.6	18.7	17.7	16.5	15.2	13.8	12.3	10.6	8.98	7.32	5.68	4.07	2.52	1.04	0.00	
-30	24.9	24.6	23.9	23.1	22.0	20.7	19.3	17.8	16.1	14.2	12.4	10.4	8.54	6.64	4.78	2.98	1.26	0.00	
-20	27.6	27.1	26.4	25.5	24.3	22.9	21.3	19.6	17.7	15.7	13.6	11.5	9.44	7.36	5.32	3.34	1.43	0.00	
-10	29.0	28.6	27.9	26.9	25.6	24.1	22.4	20.6	18.6	16.5	14.4	12.2	9.99	7.81	5.66	3.57	1.55	0.00	
0	29.3	28.8	28.1	27.1	25.8	24.3	22.6	20.8	18.8	16.7	14.6	12.4	10.2	7.98	5.80	3.68	1.61	0.00	
10	28.4	27.9	27.1	26.2	25.0	23.6	22.0	20.2	18.3	16.3	14.2	12.1	9.91	7.76	5.62	3.55	1.54	0.00	
20	26.3	26.0	25.3	24.4	23.3	22.0	20.5	18.8	17.1	15.3	13.3	11.3	9.29	7.26	5.24	3.29	1.42	0.00	
30	23.4	23.1	22.5	21.7	20.8	19.6	18.3	16.9	15.4	13.7	12.0	10.2	8.33	6.50	4.66	2.91	1.24	0.00	
40	19.7	19.5	19.0	18.4	17.6	16.6	15.5	14.3	13.1	11.7	10.2	8.66	7.08	5.48	3.93	2.43	1.03	0.00	
50	15.3	15.1	14.8	14.3	13.6	12.9	12.1	11.3	10.3	9.24	8.07	6.84	5.56	4.29	3.05	1.86	0.79	0.00	
60	10.4	10.3	10.1	9.79	9.35	8.92	8.40	7.80	7.13	6.42	5.64	4.75	3.85	2.94	2.06	1.24	0.54	0.00	
70	5.50	5.47	5.38	5.21	4.98	4.73	4.49	4.18	3.83	3.45	3.01	2.52	2.01	1.52	1.05	0.67	0.30	0.00	
80	0.89	0.93	0.93	0.90	0.82	0.73	0.74	0.72	0.66	0.64	0.54	0.36	0.29	0.34	0.34	0.24	0.08	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
160	0.03	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
170	0.08	0.06	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
180	0.11	0.08	0.09	0.04	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-06-25

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: