

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	1719.0 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	75.1V x 75.2H
	At 50% of Imax	36.3V x 35.8H
	At 90% of Imax	13.8V x 13.4H

Beam Flux	Total	1000.2 lumens per klm.
	To 10% of Imax	772.2 lumens per klm.
	To 50% of Imax	369.8 lumens per klm.
	To 90% of Imax	71.7 lumens per klm.

Upward LOR	1.1 %
Downward LOR	98.9 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-03-28

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:11.99V I:0.5823A P:4.639W PF:0.6644 Freq:59.98Hz Lamp Flux:150.277x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Micro	WEIGHT:
SPEC.:4.5W 40°LENS	DIM.:	SERIAL No.:2
MFR.: EVERFINE	SUR.:	Shielding Angle:Non Shroud

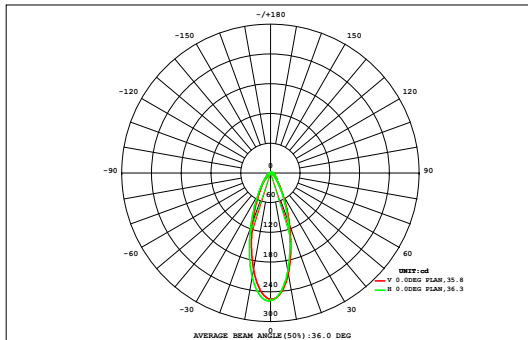

DATA OF LAMP		Eff:32.40lm/W	
MODEL	M5B1-4.5W-AMBR-A	Imax (cd)	258.3
NOMINAL POWER (W)	4.5	AVAILABILITY (%)	76.9
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	115.5
NOMINAL FLUX (lm)	150.277	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	150.3
TEST VOLTAGE (V)	12	θ @50% (H,V)	36,36DEG

72 64 56 48 40 32 24 -24 -32 -40 -48 -56 -64 -72	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a	
	0.01	0.02	0.03	0.05	0.06	0.07	0.08	0.08	0.08	0.08	0.08	0.08	0.07	0.06	0.04	0.03	0.02	0.01	0.96	0.00	
	0.02	0.03	0.04	0.06	0.08	0.09	0.11	0.12	0.12	0.12	0.12	0.11	0.09	0.08	0.06	0.04	0.03	0.02	1.33	0.00	
	0.02	0.04	0.05	0.08	0.10	0.13	0.15	0.17	0.18	0.18	0.17	0.15	0.13	0.10	0.08	0.05	0.04	0.02	1.83	0.00	
	0.02	0.04	0.06	0.09	0.13	0.17	0.22	0.26	0.29	0.29	0.27	0.23	0.18	0.13	0.10	0.07	0.04	0.02	2.63	0.00	
	0.03	0.05	0.08	0.12	0.17	0.26	0.36	0.46	0.53	0.53	0.47	0.37	0.26	0.18	0.12	0.08	0.05	0.03	4.12	1.14	
	0.03	0.05	0.09	0.14	0.24	0.39	0.61	0.86	1.04	1.05	0.88	0.63	0.40	0.24	0.15	0.09	0.05	0.03	6.95	5.17	
	0.03	0.06	0.10	0.17	0.31	0.57	1.01	1.57	2.00	2.02	1.61	1.05	0.60	0.33	0.18	0.10	0.06	0.03	11.8	10.4	
	0.03	0.06	0.11	0.20	0.39	0.78	1.51	2.52	3.36	3.39	2.60	1.59	0.83	0.41	0.21	0.11	0.06	0.03	18.2	17.0	
	0.03	0.06	0.11	0.22	0.44	0.93	1.88	3.27	4.46	4.51	3.40	2.00	1.00	0.47	0.23	0.12	0.06	0.03	23.2	22.1	
	0.03	0.06	0.11	0.22	0.45	0.94	1.91	3.32	4.55	4.60	3.45	2.03	1.01	0.48	0.23	0.12	0.06	0.03	23.6	22.5	
	0.03	0.06	0.11	0.20	0.40	0.81	1.57	2.65	3.57	3.61	2.73	1.65	0.86	0.43	0.21	0.11	0.06	0.03	19.1	17.9	
	0.03	0.06	0.10	0.18	0.33	0.61	1.08	1.70	2.22	2.23	1.75	1.12	0.64	0.34	0.19	0.10	0.06	0.03	12.8	11.4	
	0.03	0.05	0.09	0.15	0.25	0.41	0.66	0.96	1.18	1.19	0.98	0.68	0.43	0.26	0.15	0.09	0.05	0.03	7.66	5.99	
	0.03	0.05	0.08	0.12	0.18	0.28	0.39	0.52	0.61	0.61	0.53	0.40	0.28	0.19	0.12	0.08	0.05	0.03	4.55	1.82	
	0.02	0.04	0.07	0.10	0.14	0.19	0.24	0.30	0.33	0.33	0.30	0.25	0.19	0.14	0.10	0.07	0.04	0.02	2.86	0.00	
	0.02	0.04	0.05	0.08	0.10	0.13	0.16	0.18	0.20	0.20	0.19	0.16	0.13	0.10	0.08	0.05	0.04	0.02	1.93	0.00	
	0.02	0.03	0.04	0.06	0.08	0.09	0.11	0.12	0.13	0.13	0.12	0.11	0.09	0.08	0.06	0.04	0.03	0.02	1.36	0.00	
	0.01	0.02	0.03	0.05	0.06	0.07	0.08	0.08	0.09	0.09	0.08	0.08	0.07	0.06	0.04	0.03	0.02	0.01	0.97	0.00	
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)				16	24	32	40	48	56	64	72	
Φ t	0.46	0.82	1.38	2.27	3.89	6.92	12.1	19.1	24.9	25.2	19.7	12.7	7.28	4.08	2.35	1.40	0.83	0.46	146	---	
Φ a	0.00	0.00	0.00	0.00	1.05	4.82	10.2	17.4	23.2	23.4	18.0	10.8	5.23	1.35	0.00	0.00	0.00	0.00	---	116	

one-half-peak spread: U:18.0,D:18.6 , L:18.6,R:17.5


NEMA Beam Type: Type 5

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-03-28

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:11.99V I:0.5823A P:4.639W PF:0.6644 Freq:59.98Hz Lamp Flux:150.277x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Micro	WEIGHT:
SPEC.:4.5W 40°LENS	DIM.:	SERIAL No.:2
MFR.: EVERFINE	SUR.:	Shielding Angle:Non Shroud

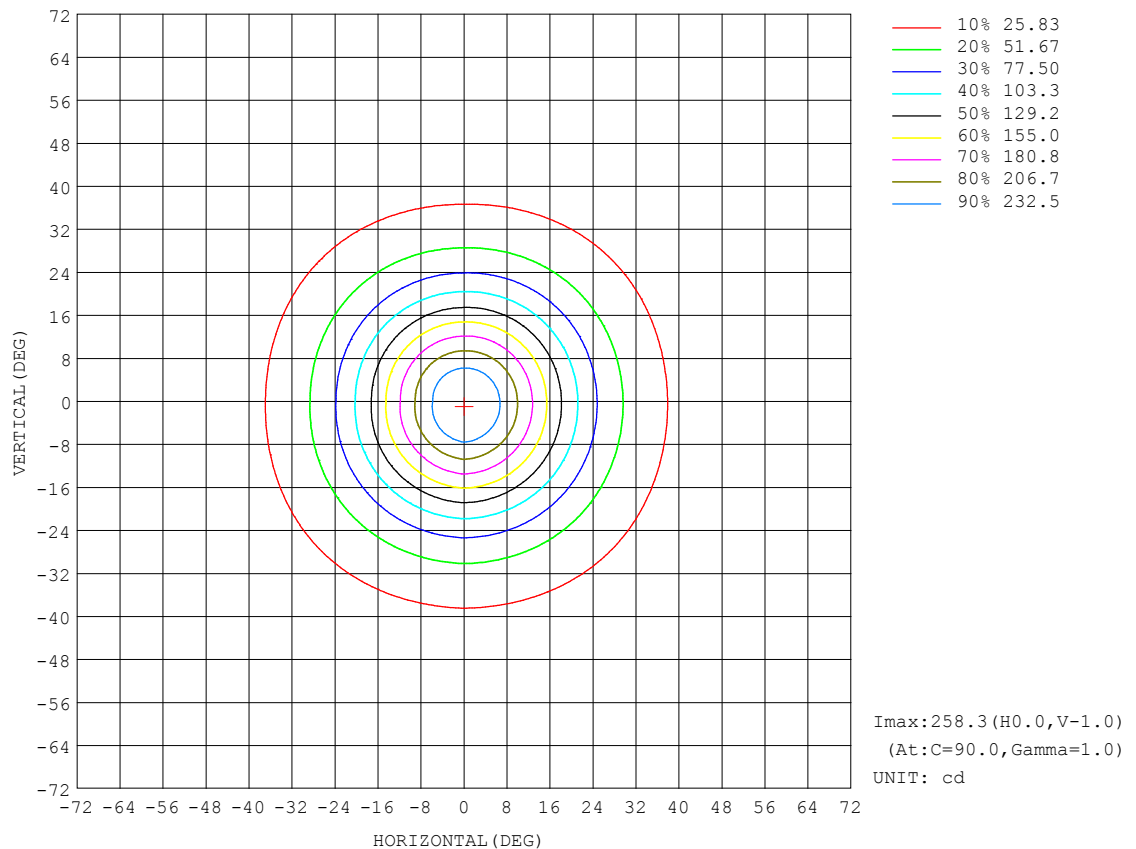


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-03-28

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:11.99V I:0.5823A P:4.639W PF:0.6644 Freq:59.98Hz Lamp Flux:150.277x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Micro	WEIGHT:
SPEC.:4.5W 40°LENS	DIM.:	SERIAL No.:2
MFR.: EVERFINE	SUR.:	Shielding Angle:Non Shroud

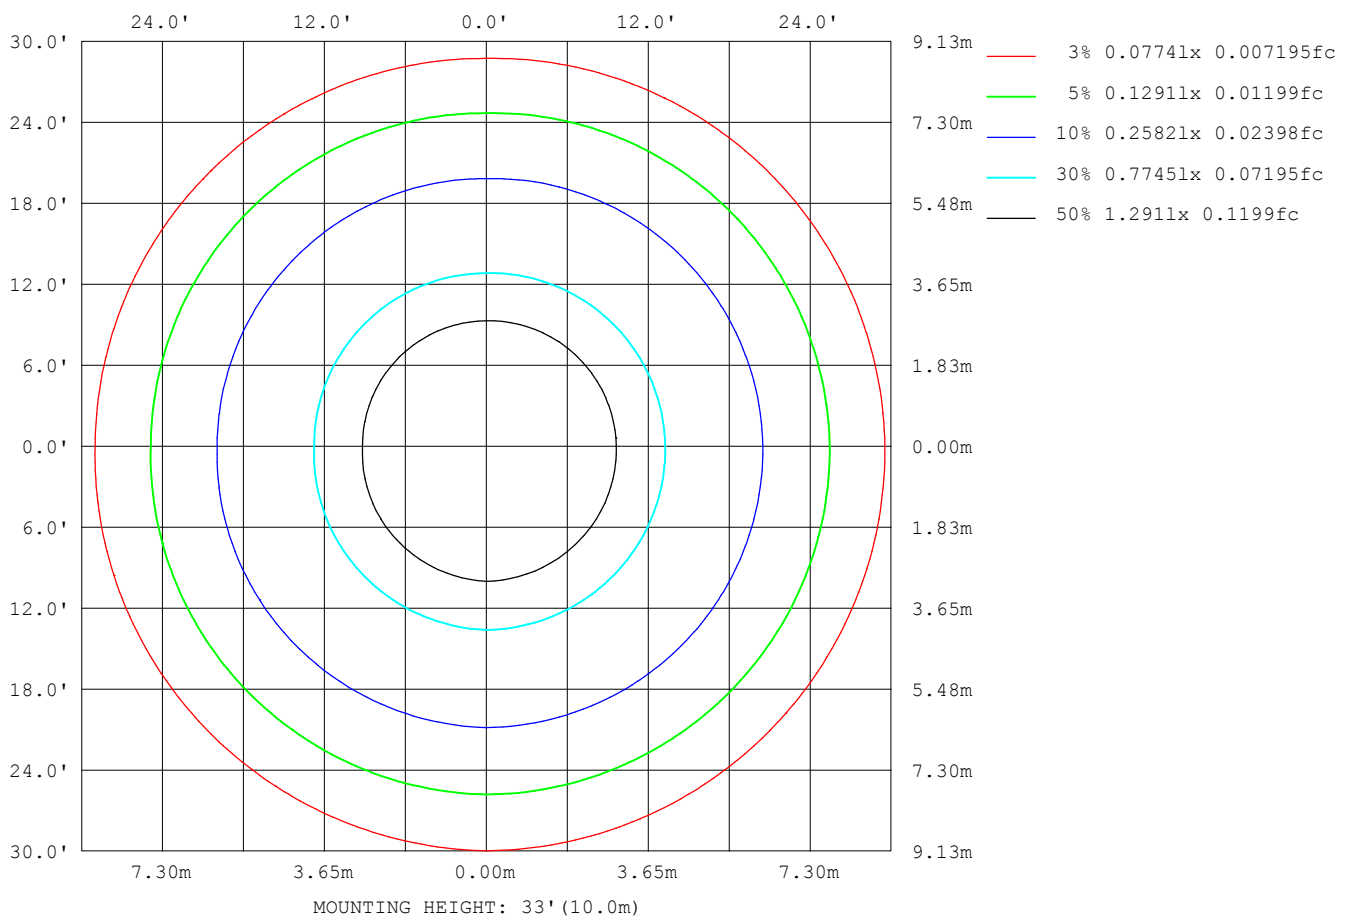

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-03-28

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

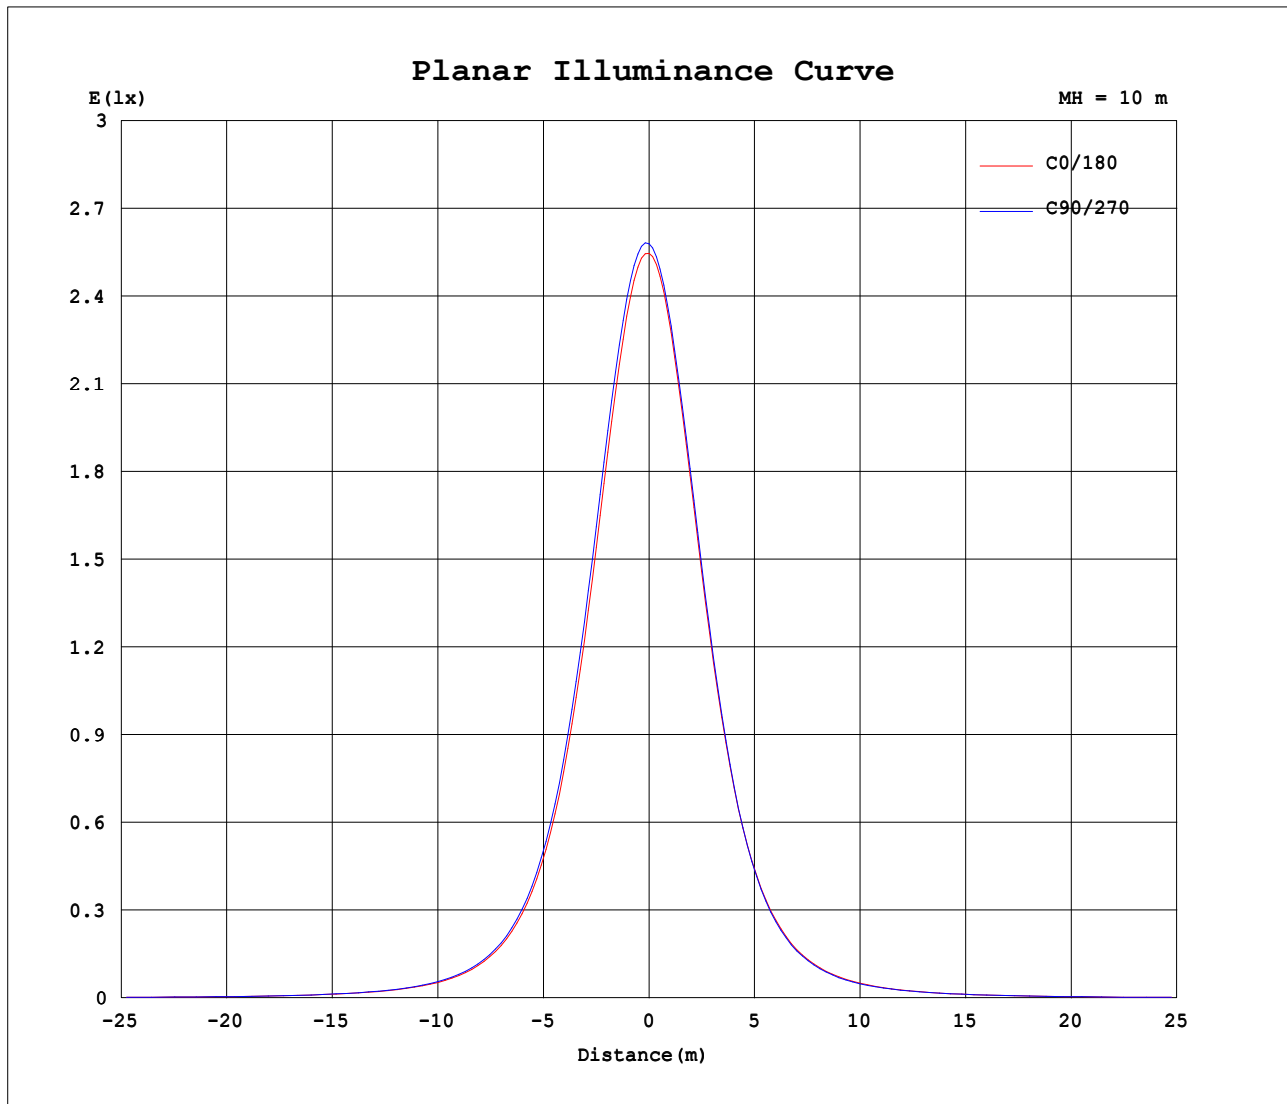


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-03-28

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:11.99V I:0.5823A P:4.639W PF:0.6644 Freq:59.98Hz Lamp Flux:150.277x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Micro	WEIGHT:
SPEC.:4.5W 40°LENS	DIM.:	SERIAL No.:2
MFR.: EVERFINE	SUR.:	Shielding Angle:Non Shroud

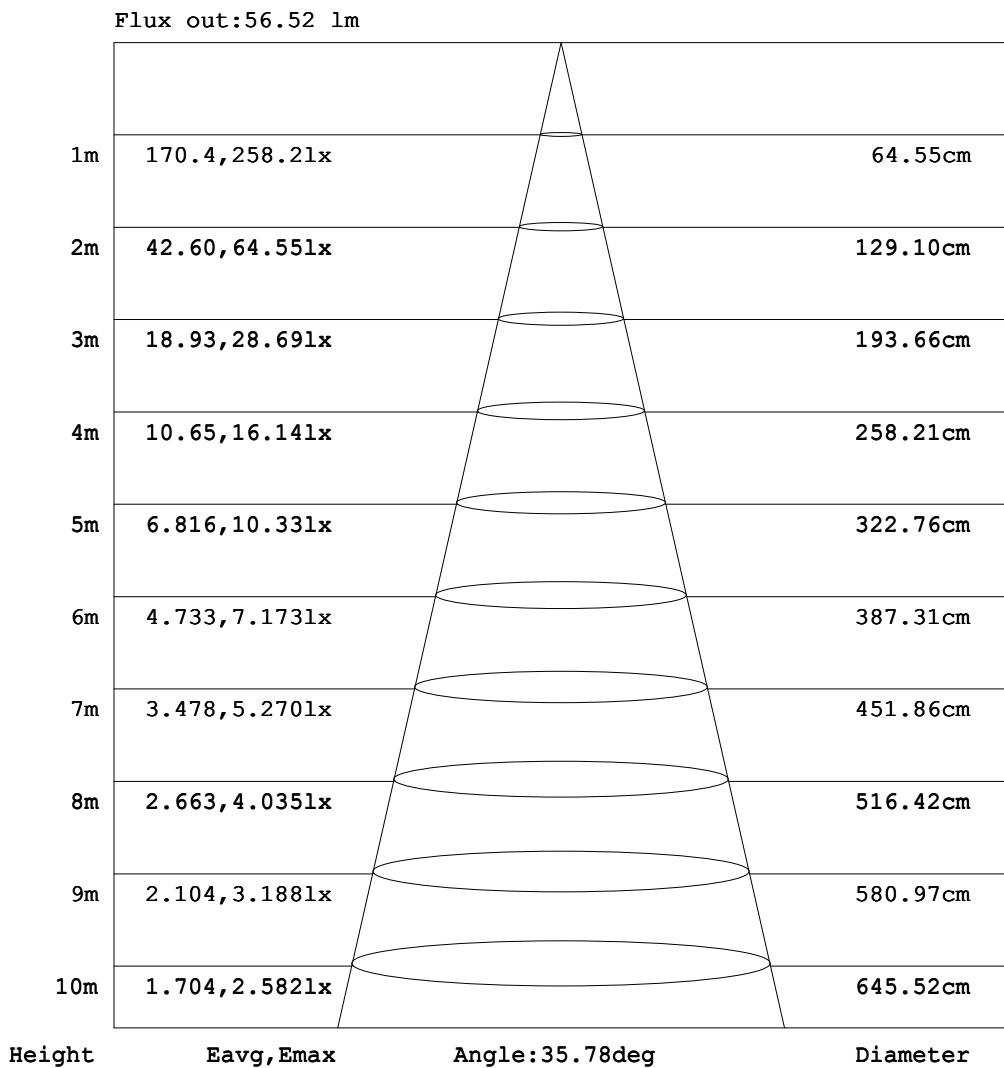

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-03-28

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:11.99V I:0.5823A P:4.639W PF:0.6644 Freq:59.98Hz Lamp Flux:150.277x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Micro	WEIGHT:
SPEC.:4.5W 40°LENS	DIM.:	SERIAL No.:2
MFR.: EVERFINE	SUR.:	Shielding Angle:Non Shroud

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.50	0.88	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.13	0.30	0.51	0.74	0.95	1.10	1.25	1.35	1.39
-170	0.50	0.87	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.14	0.29	0.49	0.71	0.91	1.09	1.23	1.31	1.37
-160	0.50	0.87	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.07	0.20	0.36	0.54	0.71	0.88	1.00	1.11	1.15
-150	0.50	0.85	0.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.07	0.18	0.29	0.41	0.54	0.64	0.71	0.75
-140	0.50	0.82	0.33	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.08	0.12	0.20	0.26	0.29	0.32
-130	0.50	0.75	0.65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.03	0.04
-120	0.50	0.67	0.85	0.36	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-110	0.50	0.59	0.76	0.82	0.52	0.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.50	0.52	0.58	0.66	0.74	0.78	0.77	0.65	0.49	0.31	0.18	0.08	0.03	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.50	0.49	0.48	0.48	0.47	0.46	0.46	0.45	0.44	0.44	0.43	0.42	0.41	0.41	0.40	0.39	0.39	0.38	0.37
-80	0.50	0.51	0.63	0.80	0.99	1.18	1.35	1.50	1.64	1.77	1.87	1.96	2.04	2.11	2.16	2.20	2.23	2.24	2.25
-70	0.50	0.63	1.00	1.38	1.71	1.99	2.25	2.48	2.70	2.93	3.13	3.32	3.51	3.66	3.79	3.90	3.97	4.02	4.03
-60	0.50	0.80	1.36	1.84	2.25	2.62	3.01	3.41	3.80	4.19	4.56	4.93	5.30	5.64	5.94	6.21	6.42	6.55	6.61
-50	0.50	0.96	1.65	2.21	2.71	3.24	3.80	4.37	4.97	5.64	6.35	7.11	7.94	8.76	9.57	10.3	10.9	11.3	11.5
-40	0.50	1.11	1.88	2.50	3.14	3.83	4.56	5.37	6.32	7.44	8.76	10.3	12.2	14.3	16.6	18.8	20.9	22.3	23.0
-30	0.50	1.22	2.06	2.76	3.53	4.34	5.26	6.39	7.79	9.57	11.9	15.1	19.4	24.8	31.3	38.4	45.1	50.2	52.6
-20	0.50	1.30	2.18	2.95	3.80	4.75	5.86	7.29	9.18	11.8	15.8	21.7	30.3	42.5	58.3	77.2	96.4	112	119
-10	0.50	1.35	2.26	3.07	4.00	5.00	6.27	7.93	10.2	13.7	19.2	27.9	41.7	62.3	91.4	128	167	199	214
0	0.50	1.37	2.28	3.11	4.06	5.09	6.41	8.12	10.6	14.3	20.4	30.2	46.0	70.2	105	150	198	238	255
10	0.50	1.35	2.26	3.07	3.99	4.99	6.25	7.88	10.1	13.5	18.8	27.2	40.5	60.2	88.1	123	160	189	201
20	0.50	1.30	2.19	2.95	3.80	4.73	5.84	7.21	9.02	11.5	15.2	20.7	28.7	39.8	54.3	71.3	88.3	101	106
30	0.50	1.23	2.06	2.76	3.52	4.33	5.23	6.32	7.64	9.28	11.4	14.3	18.1	22.9	28.5	34.5	40.0	43.9	45.2
40	0.50	1.12	1.89	2.51	3.14	3.82	4.54	5.31	6.22	7.25	8.43	9.80	11.4	13.1	15.0	16.9	18.4	19.4	19.7
50	0.50	0.97	1.66	2.22	2.72	3.24	3.79	4.35	4.92	5.55	6.20	6.88	7.58	8.26	8.91	9.48	9.93	10.2	10.3
60	0.50	0.81	1.37	1.85	2.26	2.63	3.01	3.41	3.78	4.16	4.51	4.85	5.18	5.50	5.77	5.99	6.15	6.25	6.28
70	0.50	0.65	1.03	1.40	1.73	2.00	2.26	2.48	2.71	2.93	3.13	3.32	3.49	3.64	3.76	3.86	3.93	3.97	3.98
80	0.50	0.52	0.67	0.85	1.05	1.23	1.40	1.55	1.68	1.80	1.90	1.99	2.07	2.14	2.19	2.22	2.25	2.27	2.27
90	0.50	0.50	0.51	0.52	0.53	0.53	0.54	0.55	0.55	0.56	0.57	0.57	0.58	0.59	0.60	0.60	0.61	0.62	0.62
100	0.50	0.53	0.60	0.68	0.77	0.83	0.86	0.82	0.73	0.60	0.45	0.32	0.19	0.08	0.06	0.03	0.02	0.00	0.00
110	0.50	0.60	0.78	0.87	0.64	0.21	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.50	0.68	0.87	0.44	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.50	0.76	0.69	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.50	0.83	0.36	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.05	0.11	0.12	0.12
150	0.50	0.86	0.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.10	0.17	0.28	0.36	0.44	0.48	0.50
160	0.50	0.87	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.14	0.28	0.44	0.60	0.74	0.84	0.91	0.91
170	0.50	0.88	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.11	0.26	0.44	0.65	0.84	1.02	1.14	1.21	1.23
180	0.50	0.88	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.13	0.30	0.51	0.74	0.95	1.10	1.25	1.35	1.41

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-03-28

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:11.99V I:0.5823A P:4.639W PF:0.6644 Freq:59.98Hz Lamp Flux:150.277x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Micro	WEIGHT:
SPEC.:4.5W 40°LENS	DIM.:	SERIAL No.:2
MFR.: EVERFINE	SUR.:	Shielding Angle:Non Shroud

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	1.36	1.34	1.24	1.12	0.93	0.73	0.49	0.27	0.11	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.56	0.67	
-170	1.35	1.28	1.20	1.05	0.86	0.65	0.44	0.27	0.11	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.56	0.67	
-160	1.13	1.06	0.96	0.82	0.65	0.48	0.29	0.14	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.57	0.67	
-150	0.73	0.68	0.60	0.49	0.36	0.25	0.13	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.59	0.67	
-140	0.30	0.28	0.22	0.15	0.12	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.12	0.62	0.67	
-130	0.03	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.34	0.64	0.67	
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.15	0.56	0.64	0.67	
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.27	0.54	0.63	0.64	0.67	
-100	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.08	0.16	0.30	0.44	0.55	0.60	0.62	0.63	0.63	0.65	0.67	
-90	0.39	0.41	0.42	0.44	0.46	0.47	0.49	0.51	0.52	0.54	0.55	0.57	0.59	0.60	0.62	0.64	0.65	0.67	
-80	2.24	2.23	2.20	2.16	2.11	2.05	1.97	1.89	1.79	1.68	1.56	1.43	1.29	1.14	0.98	0.84	0.72	0.67	
-70	4.02	3.97	3.90	3.79	3.66	3.50	3.31	3.12	2.91	2.68	2.47	2.25	2.01	1.76	1.47	1.17	0.85	0.67	
-60	6.56	6.43	6.23	5.97	5.66	5.33	4.96	4.58	4.19	3.80	3.39	3.00	2.61	2.26	1.88	1.47	1.00	0.67	
-50	11.4	11.0	10.4	9.66	8.85	8.02	7.19	6.40	5.68	5.01	4.39	3.80	3.23	2.69	2.22	1.72	1.15	0.67	
-40	22.5	21.1	19.1	16.9	14.6	12.4	10.5	8.91	7.55	6.39	5.43	4.59	3.83	3.13	2.49	1.92	1.27	0.67	
-30	50.7	45.9	39.3	32.3	25.7	20.1	15.7	12.3	9.81	7.93	6.47	5.32	4.36	3.50	2.73	2.07	1.36	0.67	
-20	113	98.5	79.7	60.7	44.5	31.9	22.8	16.5	12.3	9.44	7.44	5.95	4.79	3.80	2.92	2.19	1.43	0.67	
-10	201	171	133	96.4	66.3	44.5	29.8	20.3	14.4	10.6	8.12	6.37	5.07	3.99	3.06	2.26	1.47	0.67	
0	243	206	159	113	76.1	50.0	32.7	21.8	15.1	11.0	8.34	6.52	5.16	4.05	3.10	2.29	1.48	0.67	
10	192	164	128	93.1	64.2	43.3	29.1	19.9	14.2	10.5	8.07	6.35	5.06	3.98	3.06	2.26	1.47	0.67	
20	103	90.4	73.8	56.7	41.9	30.3	21.8	16.0	12.0	9.28	7.36	5.92	4.78	3.80	2.92	2.19	1.43	0.67	
30	44.3	40.7	35.4	29.5	23.7	18.8	14.8	11.8	9.52	7.78	6.40	5.29	4.35	3.49	2.73	2.08	1.37	0.67	
40	19.6	18.6	17.2	15.3	13.4	11.6	10.0	8.58	7.36	6.29	5.37	4.56	3.82	3.13	2.50	1.93	1.28	0.67	
50	10.2	9.98	9.56	9.00	8.35	7.66	6.95	6.26	5.59	4.97	4.37	3.79	3.23	2.69	2.22	1.73	1.16	0.67	
60	6.26	6.17	6.01	5.80	5.52	5.21	4.88	4.53	4.16	3.78	3.39	3.00	2.61	2.26	1.89	1.48	1.02	0.67	
70	3.97	3.93	3.86	3.76	3.64	3.48	3.31	3.12	2.91	2.69	2.48	2.26	2.03	1.78	1.50	1.20	0.87	0.67	
80	2.27	2.25	2.22	2.19	2.14	2.08	2.00	1.92	1.83	1.73	1.61	1.48	1.34	1.19	1.03	0.87	0.73	0.67	
90	0.63	0.63	0.63	0.63	0.64	0.64	0.64	0.64	0.65	0.65	0.65	0.65	0.66	0.66	0.66	0.66	0.67	0.67	
100	0.00	0.02	0.03	0.06	0.08	0.17	0.26	0.35	0.45	0.54	0.61	0.65	0.65	0.65	0.65	0.65	0.67	0.67	
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.13	0.38	0.59	0.64	0.65	0.67	
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.23	0.58	0.65	0.67	
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.38	0.64	0.67	
140	0.13	0.13	0.08	0.05	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.16	0.62	0.67	
150	0.50	0.48	0.42	0.35	0.25	0.17	0.07	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.60	0.67	
160	0.93	0.89	0.82	0.70	0.55	0.40	0.24	0.10	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.58	0.67	
170	1.24	1.19	1.13	0.98	0.80	0.60	0.41	0.24	0.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.56	0.67	
180	1.36	1.34	1.24	1.12	0.93	0.73	0.49	0.27	0.11	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.56	0.67	

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2025-03-28

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: