

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	683.4 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	114.8V x 136.4H
	At 50% of Imax	56.5V x 77.4H
	At 90% of Imax	21.6V x 34.4H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	933.2 lumens per klm.
	To 50% of Imax	532.4 lumens per klm.
	To 90% of Imax	126.8 lumens per klm.

Upward LOR	0.9 %
Downward LOR	99.1 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-07-03

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.15V I:0.4199A P:3.579W PF:0.7013 Freq:59.97Hz Lamp Flux:221.865x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Micro	WEIGHT:
SPEC.:3.5W 3000K 60°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-033

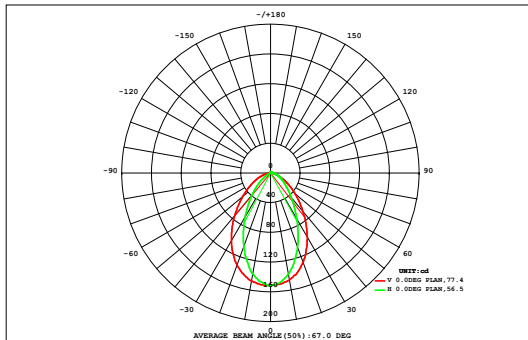

DATA OF LAMP		Eff:61.99lm/W	
MODEL M4B1	-3.5W-30K-60-A	Imax(cd)	151.6
NOMINAL POWER(W)	3.5	AVAILABILITY(%)	92.9
RATED VOLTAGE(V)	12	Avai. FLUX(lm)	206.1
NOMINAL FLUX(lm)	221.865	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	221.9
TEST VOLTAGE(V)	12	θ @50%(H,V)	77,57DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.00	0.01	0.02	0.03	0.04	0.05	0.06	0.06	0.05	0.04	0.02	0.01	0.01	0.00	0.00	0.00	0.39	0.00
90	0.00	0.00	0.00	0.01	0.02	0.03	0.04	0.05	0.06	0.06	0.05	0.04	0.02	0.01	0.01	0.00	0.00	0.00	1.79	0.00
80	0.00	0.00	0.02	0.05	0.10	0.15	0.19	0.21	0.22	0.22	0.20	0.17	0.13	0.08	0.04	0.01	0.00	0.00	3.71	0.87
70	0.00	0.01	0.06	0.13	0.22	0.31	0.38	0.42	0.42	0.41	0.40	0.35	0.27	0.19	0.10	0.04	0.01	0.00	6.16	5.28
60	0.00	0.02	0.10	0.22	0.36	0.50	0.62	0.69	0.69	0.68	0.66	0.58	0.46	0.32	0.18	0.08	0.01	0.00	9.56	9.09
50	0.00	0.04	0.14	0.31	0.52	0.76	0.97	1.10	1.10	1.09	1.06	0.91	0.69	0.47	0.27	0.12	0.02	0.00	14.4	14.0
40	0.00	0.05	0.19	0.41	0.72	1.09	1.45	1.72	1.78	1.76	1.66	1.37	1.00	0.64	0.35	0.15	0.04	0.00	20.6	20.3
30	0.00	0.06	0.22	0.51	0.93	1.47	2.06	2.54	2.73	2.71	2.48	1.96	1.36	0.84	0.44	0.19	0.04	0.00	26.9	26.7
20	0.00	0.07	0.25	0.59	1.13	1.86	2.69	3.39	3.75	3.74	3.33	2.57	1.73	1.02	0.52	0.21	0.05	0.00	31.3	31.1
10	0.00	0.07	0.27	0.65	1.28	2.16	3.15	3.98	4.42	4.40	3.91	3.01	2.00	1.15	0.57	0.23	0.05	0.00	31.2	31.0
0	0.00	0.07	0.27	0.65	1.27	2.16	3.15	3.97	4.41	4.39	3.91	3.01	1.99	1.14	0.56	0.22	0.05	0.00	26.6	26.4
-10	0.00	0.07	0.24	0.57	1.10	1.84	2.67	3.38	3.74	3.72	3.31	2.55	1.70	0.99	0.50	0.20	0.05	0.00	20.0	19.7
-20	0.00	0.06	0.21	0.47	0.88	1.43	2.02	2.51	2.69	2.67	2.44	1.92	1.32	0.79	0.40	0.17	0.04	0.00	13.4	13.0
-30	0.00	0.05	0.16	0.36	0.64	1.00	1.36	1.63	1.69	1.67	1.57	1.28	0.91	0.57	0.30	0.13	0.03	0.00	7.91	7.20
-40	0.00	0.03	0.12	0.25	0.43	0.63	0.82	0.93	0.91	0.90	0.88	0.76	0.57	0.37	0.21	0.09	0.02	0.00	3.96	1.42
-50	0.00	0.02	0.08	0.16	0.25	0.34	0.41	0.44	0.39	0.38	0.41	0.37	0.30	0.21	0.13	0.06	0.01	0.00	1.52	0.00
-60	0.00	0.01	0.04	0.09	0.13	0.16	0.17	0.15	0.10	0.09	0.13	0.14	0.13	0.10	0.06	0.02	0.00	0.00	0.44	0.00
-70	0.00	0.00	0.01	0.03	0.05	0.06	0.06	0.04	0.02	0.01	0.03	0.04	0.04	0.03	0.01	0.00	0.00	0.00	0.02	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
HORIZONTAL (DEG)																				
Φ t	0.03	0.64	2.39	5.46	10.0	16.0	22.2	27.1	29.1	28.9	26.4	21.0	14.6	8.90	4.65	1.91	0.44	0.01	220	---
Φ a	0.00	0.00	1.39	4.60	9.18	15.1	21.3	26.3	28.2	28.0	25.6	20.2	13.8	8.03	3.74	0.79	0.00	0.00	---	206


one-half-peak spread: U:27.7,D:26.7 , L:35.1,R:35.1 NEMA Beam Type: Type 7 x 6 (H x V)

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-07-03

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.15V I:0.4199A P:3.579W PF:0.7013 Freq:59.97Hz Lamp Flux:221.865x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Micro	WEIGHT:
SPEC.:3.5W 3000K 60°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-033

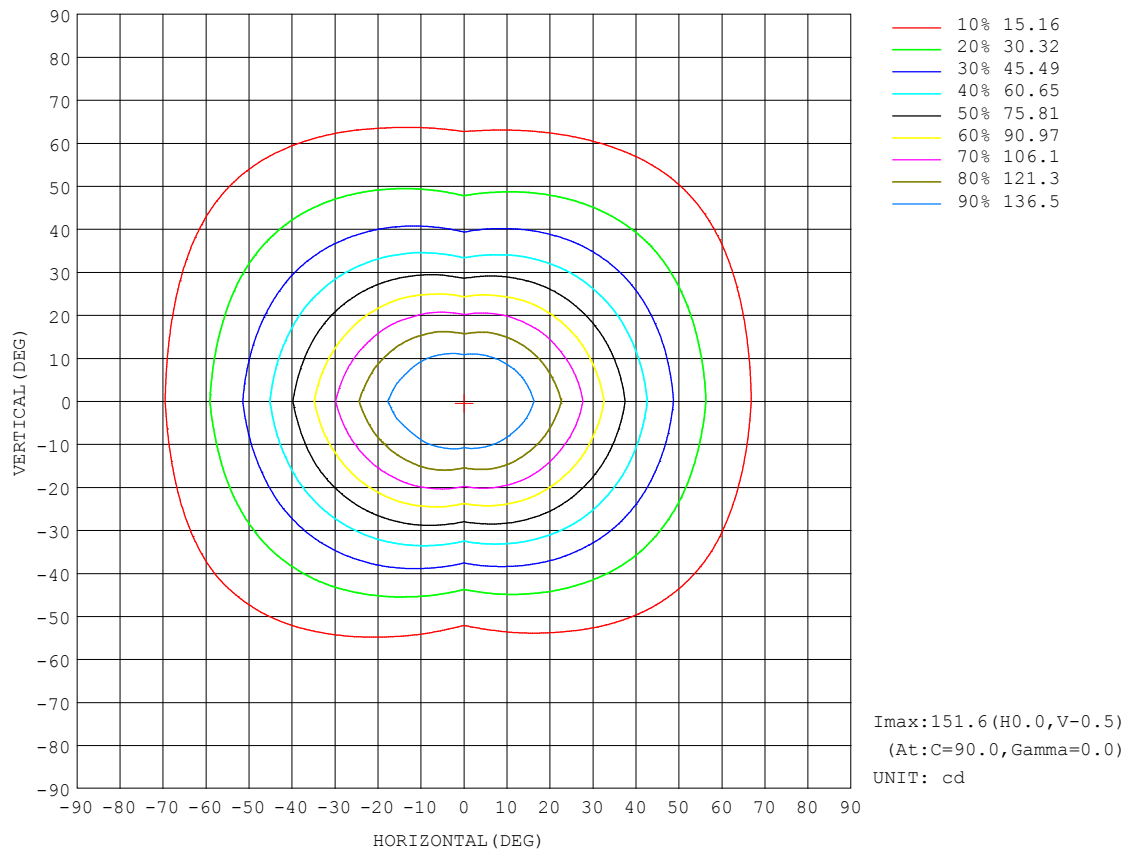


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-07-03

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.15V I:0.4199A P:3.579W PF:0.7013 Freq:59.97Hz Lamp Flux:221.865x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Micro	WEIGHT:
SPEC.:3.5W 3000K 60°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-033

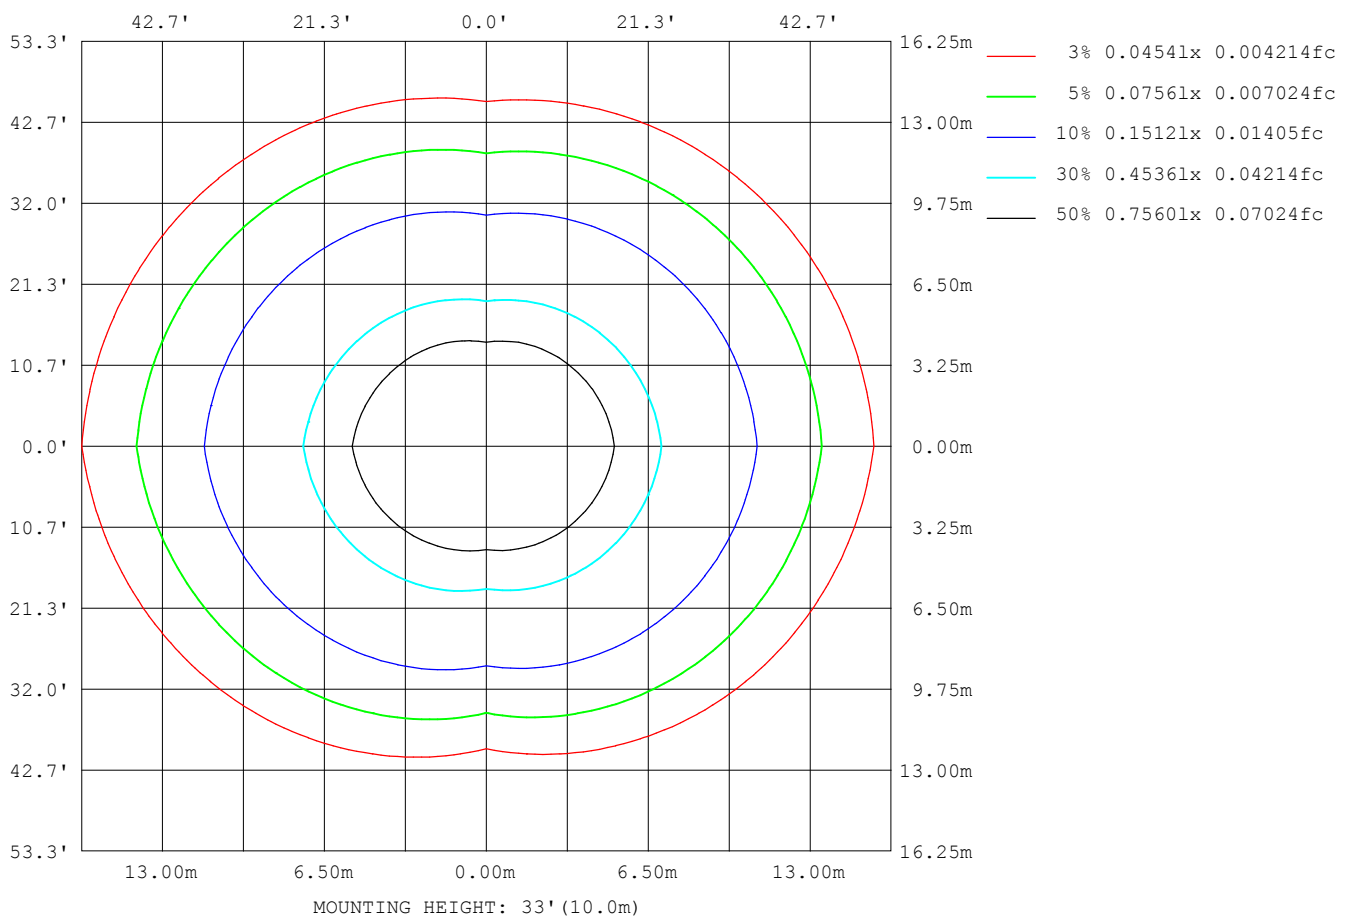

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-07-03

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

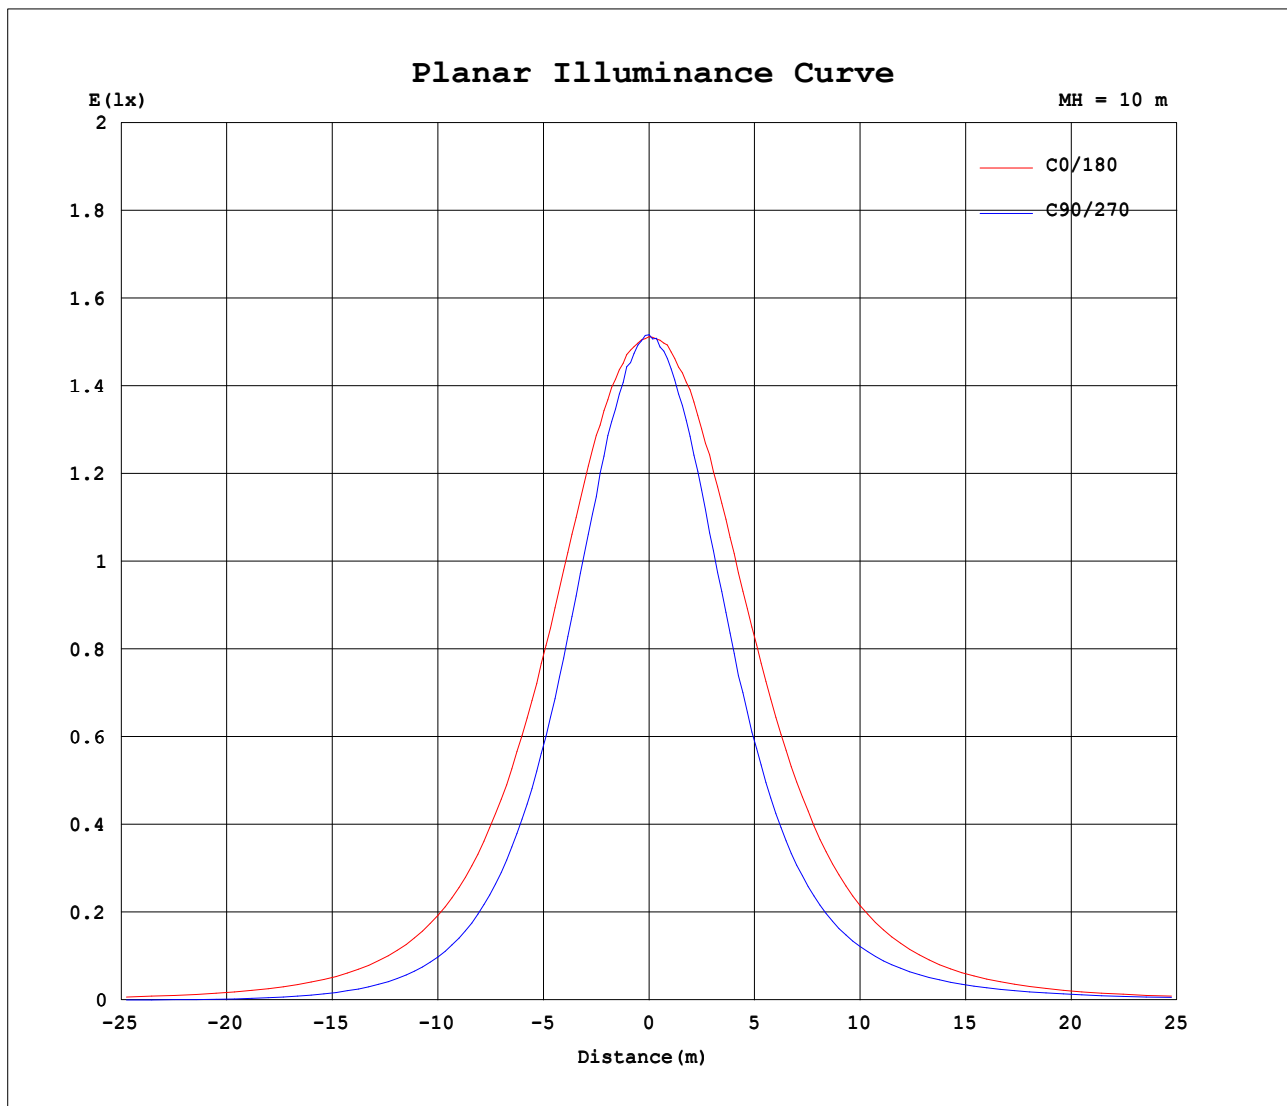


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-07-03

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.15V I:0.4199A P:3.579W PF:0.7013 Freq:59.97Hz Lamp Flux:221.865x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Micro	WEIGHT:
SPEC.:3.5W 3000K 60°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-033

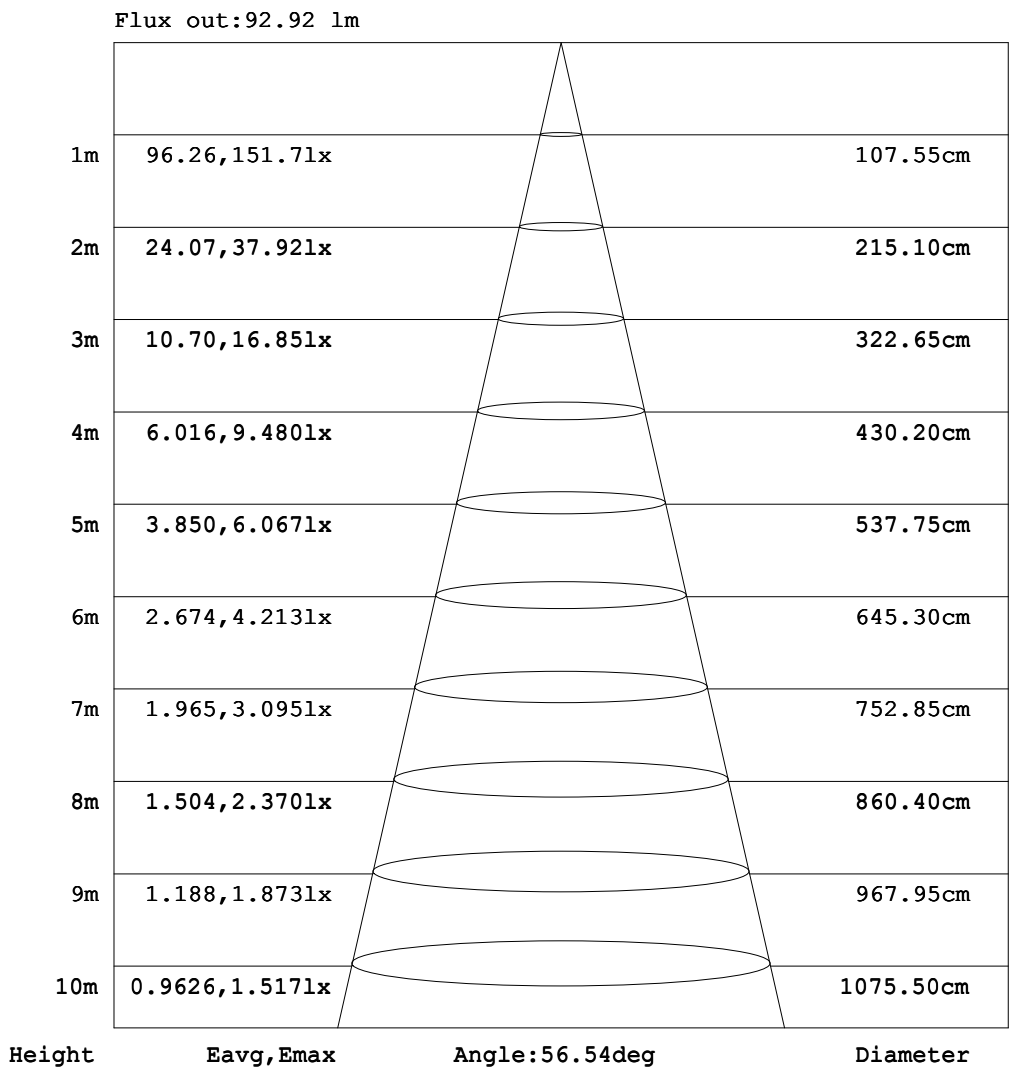

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-07-03

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.15V I:0.4199A P:3.579W PF:0.7013 Freq:59.97Hz Lamp Flux:221.865x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Micro	WEIGHT:
SPEC.:3.5W 3000K 60°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-033

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.20	0.32	0.45	0.59	0.73	0.88	1.00	1.14	1.27	1.36	1.46	1.53
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.08	0.19	0.30	0.43	0.58	0.71	0.84	0.98	1.11	1.23	1.33	1.41	1.44
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.14	0.25	0.36	0.49	0.62	0.74	0.86	0.97	1.07	1.16	1.21	1.24
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.09	0.18	0.26	0.37	0.47	0.58	0.67	0.76	0.83	0.89	0.94	0.97
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.09	0.15	0.22	0.30	0.37	0.44	0.51	0.56	0.62	0.63	0.64
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.05	0.10	0.14	0.19	0.22	0.26	0.29	0.32	0.34	0.35
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.06	0.08	0.10	0.11	0.12	0.12
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.03	0.10	0.21	0.37	0.54	0.70	0.82	0.89	0.91	0.86	0.76	0.61	0.42	0.22	0.00
-70	0.00	0.00	0.03	0.29	0.92	1.75	2.57	3.26	3.75	4.11	4.24	4.20	3.99	3.61	3.15	2.56	1.85	1.06	0.23
-60	0.00	0.00	0.28	1.43	3.03	4.55	5.92	7.02	7.89	8.55	9.03	9.38	9.53	9.56	9.33	8.84	8.05	6.96	5.60
-50	0.00	0.02	0.89	3.07	5.40	7.62	9.64	11.5	13.4	15.3	17.2	18.9	20.4	21.5	22.0	22.2	21.6	20.4	18.5
-40	0.00	0.07	1.70	4.72	7.81	10.8	13.8	17.1	20.7	24.5	28.3	32.2	35.7	38.8	41.1	42.5	42.7	41.6	39.1
-30	0.00	0.16	2.54	6.21	10.1	14.0	18.4	23.4	29.0	35.2	41.7	48.3	55.1	61.1	66.4	70.2	72.0	71.6	68.8
-20	0.00	0.24	3.23	7.52	12.1	17.1	22.9	29.6	37.2	46.1	55.5	65.7	76.1	85.6	94.5	101	106	108	105
-10	0.00	0.29	3.69	8.45	13.6	19.5	26.5	34.6	44.4	55.2	67.5	81.0	94.0	107	118	128	134	139	138
0	0.00	0.32	3.90	8.95	14.5	21.0	28.7	37.8	48.7	60.9	75.2	90.4	106	120	132	141	147	151	151
10	0.00	0.31	3.78	8.66	14.0	20.1	27.2	35.4	45.2	56.0	68.2	81.6	94.4	107	119	128	135	139	138
20	0.00	0.27	3.39	7.91	12.8	18.2	24.3	31.2	39.0	47.8	57.1	67.0	77.2	86.5	95.4	102	107	109	107
30	0.00	0.20	2.75	6.73	11.0	15.6	20.5	25.9	31.7	38.0	44.5	51.0	57.4	63.3	68.4	71.8	73.6	73.5	70.9
40	0.00	0.12	1.93	5.29	8.88	12.6	16.4	20.3	24.4	28.5	32.6	36.5	40.1	43.1	45.4	46.7	47.0	46.1	43.9
50	0.00	0.06	1.11	3.62	6.43	9.30	12.1	14.9	17.6	20.2	22.7	24.8	26.7	28.1	29.1	29.5	29.3	28.5	27.2
60	0.00	0.03	0.46	1.88	3.89	5.93	7.97	9.87	11.7	13.2	14.7	16.0	16.9	17.7	18.2	18.3	18.2	17.8	17.1
70	0.00	0.02	0.15	0.60	1.50	2.70	3.97	5.19	6.28	7.31	8.18	8.92	9.54	10.0	10.4	10.5	10.5	10.4	10.2
80	0.00	0.00	0.04	0.12	0.28	0.52	0.84	1.24	1.69	2.16	2.61	3.03	3.41	3.73	3.99	4.19	4.34	4.44	4.49
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.06	0.07	0.07	0.07	0.06	0.05	0.05	0.04
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.06	0.09	0.12	0.15	0.23	0.24	0.28	0.33	0.34	0.32	0.30
150	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.07	0.12	0.18	0.27	0.34	0.43	0.51	0.56	0.66	0.67	0.66	0.65
160	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.12	0.20	0.31	0.41	0.52	0.63	0.74	0.84	0.92	0.97	1.03	1.04
170	0.00	0.00	0.00	0.00	0.00	0.00	0.08	0.17	0.28	0.39	0.54	0.66	0.79	0.91	1.04	1.15	1.23	1.29	1.35
180	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.20	0.32	0.45	0.59	0.73	0.88	1.00	1.14	1.27	1.36	1.46	1.52

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-07-03

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.15V I:0.4199A P:3.579W PF:0.7013 Freq:59.97Hz Lamp Flux:221.865x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Micro	WEIGHT:
SPEC.:3.5W 3000K 60°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:LAB-033

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	1.49	1.40	1.37	1.23	1.15	1.04	0.90	0.77	0.64	0.58	0.37	0.29	0.14	0.02	0.00	0.00	0.00	0.00	
-170	1.42	1.37	1.28	1.19	1.09	1.00	0.87	0.74	0.61	0.48	0.34	0.24	0.13	0.01	0.00	0.00	0.00	0.00	
-160	1.23	1.19	1.13	1.04	0.97	0.86	0.74	0.65	0.57	0.41	0.28	0.18	0.12	0.00	0.00	0.00	0.00	0.00	
-150	0.96	0.93	0.88	0.83	0.76	0.69	0.59	0.53	0.39	0.30	0.24	0.13	0.06	0.00	0.00	0.00	0.00	0.00	
-140	0.65	0.65	0.62	0.57	0.52	0.49	0.39	0.34	0.26	0.21	0.12	0.09	0.00	0.00	0.00	0.00	0.00	0.00	
-130	0.36	0.35	0.33	0.31	0.29	0.26	0.22	0.19	0.11	0.10	0.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.13	0.13	0.12	0.11	0.09	0.09	0.07	0.06	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.11	0.21	0.29	0.34	0.36	0.35	0.31	0.24	0.16	0.09	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.88	1.49	2.04	2.47	2.78	3.03	3.12	3.07	2.86	2.47	1.93	1.26	0.63	0.19	0.00	0.00	0.00	0.00	
-60	6.69	7.50	8.02	8.26	8.29	8.13	7.82	7.40	6.87	6.15	5.27	4.20	2.89	1.49	0.40	0.00	0.00	0.00	
-50	20.0	20.8	21.0	20.5	19.7	18.3	16.7	14.9	12.9	11.1	9.31	7.51	5.60	3.55	1.44	0.15	0.00	0.00	
-40	41.0	41.5	40.8	38.9	36.2	32.8	29.2	25.3	21.4	17.8	14.4	11.3	8.44	5.65	2.82	0.51	0.00	0.00	
-30	70.9	70.6	67.9	63.5	57.7	51.2	44.5	37.7	31.3	25.3	20.0	15.4	11.3	7.65	4.15	0.99	0.00	0.00	
-20	107	105	98.9	91.0	81.7	71.4	60.6	50.6	41.2	32.7	25.5	19.2	14.0	9.39	5.26	1.46	0.00	0.00	
-10	138	133	126	115	103	88.7	74.9	61.4	49.6	39.0	29.9	22.4	16.1	10.7	6.04	1.81	0.00	0.00	
0	150	146	139	128	114	99.0	83.3	68.1	54.6	42.7	32.7	24.4	17.4	11.5	6.44	1.96	0.00	0.00	
10	138	134	126	115	103	89.1	75.5	62.0	50.3	39.8	30.7	23.2	16.7	11.1	6.25	1.90	0.02	0.00	
20	108	105	99.8	91.9	82.6	72.5	62.0	52.1	42.9	34.5	27.1	20.7	15.1	10.1	5.65	1.62	0.03	0.00	
30	72.7	72.2	69.6	65.5	59.9	53.6	47.1	40.4	34.1	28.0	22.5	17.5	12.9	8.63	4.67	1.20	0.04	0.00	
40	45.5	45.8	44.9	43.2	40.5	37.2	33.5	29.6	25.4	21.4	17.5	13.8	10.2	6.72	3.39	0.74	0.05	0.00	
50	28.1	28.5	28.2	27.5	26.3	24.6	22.6	20.4	17.9	15.3	12.7	10.0	7.27	4.58	1.99	0.37	0.04	0.00	
60	17.5	17.6	17.5	17.1	16.4	15.5	14.4	13.1	11.6	9.92	8.12	6.24	4.27	2.35	0.86	0.18	0.03	0.00	
70	10.2	10.2	10.0	9.68	9.18	8.58	7.85	7.00	6.07	5.00	3.85	2.66	1.57	0.77	0.31	0.12	0.02	0.00	
80	4.33	4.12	3.87	3.57	3.23	2.85	2.44	2.04	1.63	1.24	0.90	0.63	0.42	0.25	0.12	0.04	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
120	0.02	0.03	0.04	0.05	0.05	0.05	0.06	0.06	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
130	0.07	0.08	0.10	0.12	0.14	0.14	0.14	0.13	0.08	0.09	0.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
140	0.33	0.37	0.38	0.34	0.33	0.35	0.25	0.24	0.19	0.17	0.10	0.09	0.00	0.00	0.00	0.00	0.00	0.00	
150	0.68	0.71	0.71	0.63	0.60	0.54	0.45	0.44	0.31	0.25	0.21	0.12	0.06	0.00	0.00	0.00	0.00	0.00	
160	1.04	1.01	0.98	0.92	0.86	0.75	0.65	0.56	0.51	0.36	0.26	0.17	0.12	0.00	0.00	0.00	0.00	0.00	
170	1.30	1.27	1.20	1.11	1.02	0.95	0.82	0.69	0.58	0.45	0.32	0.23	0.13	0.01	0.00	0.00	0.00	0.00	
180	1.49	1.40	1.37	1.23	1.15	1.04	0.90	0.77	0.64	0.58	0.37	0.29	0.14	0.02	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-07-03

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: