

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	736.0 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	103.5V x 129.4H
	At 50% of Imax	52.2V x 78.3H
	At 90% of Imax	20.2V x 32.8H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	916.0 lumens per klm.
	To 50% of Imax	552.7 lumens per klm.
	To 90% of Imax	120.3 lumens per klm.

Upward LOR	1.2 %
Downward LOR	98.9 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-27

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.11V I:1.327A P:11.56W PF:0.7198 Freq:59.97Hz Lamp Flux:467.75x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot light CW	WEIGHT:
SPEC.:12W 2700K 60°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:FLOOD-LIGHT SHROUD

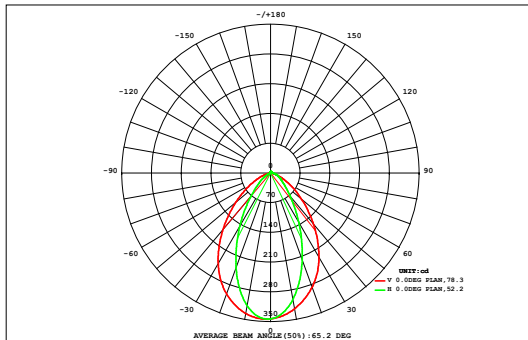

DATA OF LAMP		Eff:40.46lm/W	
MODEL	F7A1-12W-BZ	Imax (cd)	344.3
NOMINAL POWER (W)	12	AVAILABILITY (%)	92.0
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	430.4
NOMINAL FLUX (lm)	467.75	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	467.7
TEST VOLTAGE (V)	12	θ @50% (H,V)	78,52DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.00	0.01	0.02	0.04	0.06	0.08	0.09	0.09	0.08	0.06	0.04	0.02	0.01	0.00	0.00	0.00	0.63	0.00
90	0.00	0.00	0.00	0.01	0.02	0.04	0.06	0.08	0.09	0.09	0.08	0.06	0.04	0.02	0.01	0.00	0.00	0.00	2.70	0.00
80	0.00	0.00	0.02	0.06	0.12	0.19	0.27	0.33	0.36	0.36	0.33	0.27	0.20	0.12	0.06	0.02	0.00	0.00	5.82	0.00
70	0.00	0.01	0.05	0.16	0.31	0.47	0.60	0.67	0.67	0.67	0.66	0.58	0.45	0.30	0.16	0.05	0.01	0.00	10.2	5.50
60	0.00	0.02	0.11	0.31	0.58	0.86	1.07	1.16	1.10	1.08	1.12	1.02	0.81	0.55	0.30	0.11	0.02	0.00	17.0	15.6
50	0.00	0.03	0.19	0.50	0.94	1.42	1.81	1.98	1.86	1.82	1.89	1.70	1.32	0.87	0.47	0.18	0.03	0.00	27.7	26.8
40	0.00	0.05	0.27	0.72	1.40	2.20	2.93	3.36	3.29	3.24	3.22	2.74	2.02	1.28	0.67	0.26	0.05	0.00	42.4	41.7
30	0.00	0.07	0.35	0.96	1.93	3.17	4.42	5.33	5.53	5.46	5.13	4.15	2.91	1.76	0.88	0.33	0.07	0.00	58.2	57.6
20	0.00	0.08	0.42	1.18	2.46	4.17	5.98	7.43	8.09	8.00	7.17	5.63	3.83	2.22	1.07	0.39	0.08	0.00	69.9	69.4
10	0.00	0.08	0.46	1.34	2.87	4.99	7.21	8.97	9.92	9.79	8.62	6.77	4.57	2.59	1.21	0.42	0.08	0.00	70.6	70.0
0	0.00	0.08	0.46	1.33	2.87	5.00	7.27	9.07	10.1	9.97	8.72	6.83	4.58	2.58	1.20	0.42	0.08	0.00	59.8	59.2
-10	0.00	0.07	0.40	1.15	2.43	4.19	6.10	7.69	8.53	8.44	7.44	5.76	3.85	2.20	1.04	0.37	0.07	0.00	43.7	43.0
-20	0.00	0.06	0.33	0.92	1.88	3.14	4.50	5.58	5.96	5.89	5.39	4.23	2.89	1.70	0.84	0.30	0.06	0.00	27.5	26.5
-30	0.00	0.04	0.24	0.66	1.32	2.11	2.88	3.42	3.45	3.40	3.27	2.70	1.94	1.20	0.61	0.22	0.04	0.00	15.3	13.6
-40	0.00	0.02	0.15	0.42	0.83	1.28	1.65	1.81	1.69	1.65	1.73	1.54	1.18	0.76	0.39	0.15	0.03	0.00	7.63	1.52
-50	0.00	0.01	0.08	0.23	0.44	0.67	0.84	0.88	0.77	0.76	0.84	0.78	0.62	0.41	0.22	0.08	0.01	0.00	2.82	0.00
-60	0.00	0.00	0.03	0.09	0.18	0.26	0.31	0.31	0.26	0.25	0.30	0.30	0.24	0.17	0.09	0.03	0.00	0.00	0.51	0.00
-70	0.00	0.00	0.00	0.01	0.03	0.05	0.06	0.05	0.03	0.03	0.05	0.06	0.06	0.04	0.02	0.00	0.00	0.00	0.01	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	---	---
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	---	---
HORIZONTAL (DEG)																				
Φ t	0.01	0.63	3.56	10.1	20.6	34.2	48.0	58.1	61.7	60.9	56.0	45.1	31.5	18.8	9.22	3.35	0.64	0.02	462	---
Φ a	0.00	0.00	1.15	8.09	18.7	32.3	45.9	55.9	59.2	58.4	53.7	43.0	29.5	16.8	7.10	0.81	0.00	0.00	---	430

one-half-peak spread: U:26.2,D:26.4 , L:38.6,R:40.2


NEMA Beam Type: Type 6

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-27

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.11V I:1.327A P:11.56W PF:0.7198 Freq:59.97Hz Lamp Flux:467.75x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot light CW	WEIGHT:
SPEC.:12W 2700K 60°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:FLOOD-LIGHT SHROUD

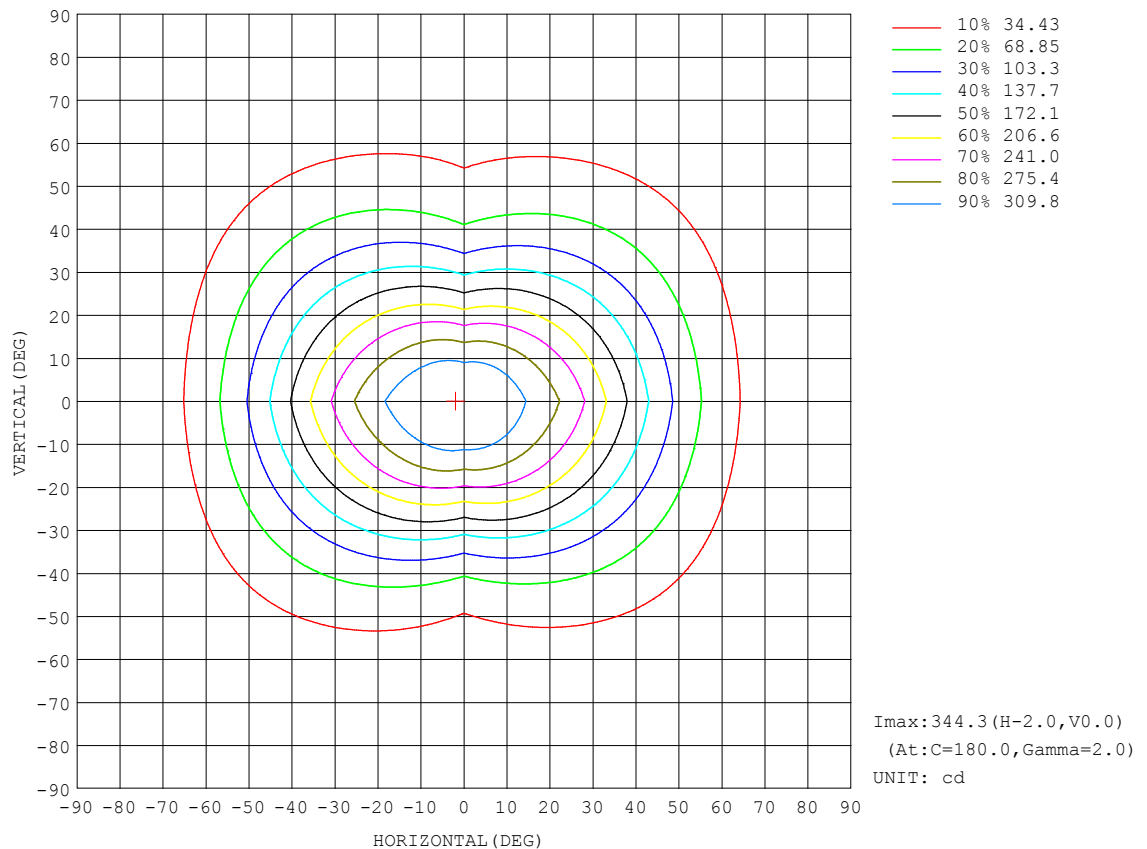


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-27

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.11V I:1.327A P:11.56W PF:0.7198 Freq:59.97Hz Lamp Flux:467.75x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot light CW	WEIGHT:
SPEC.:12W 2700K 60°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:FLOOD-LIGHT SHROUD

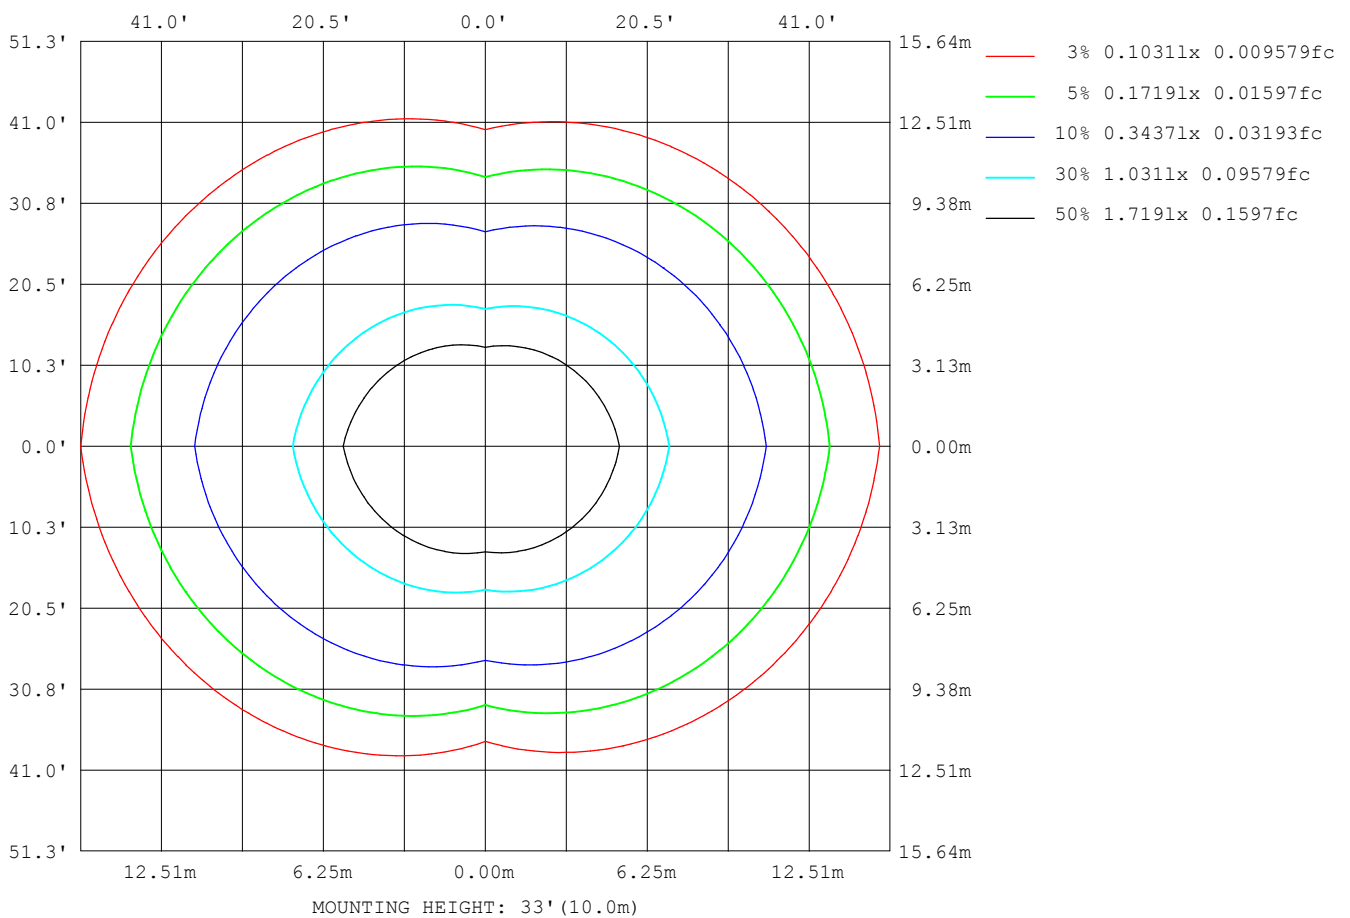

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-27

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

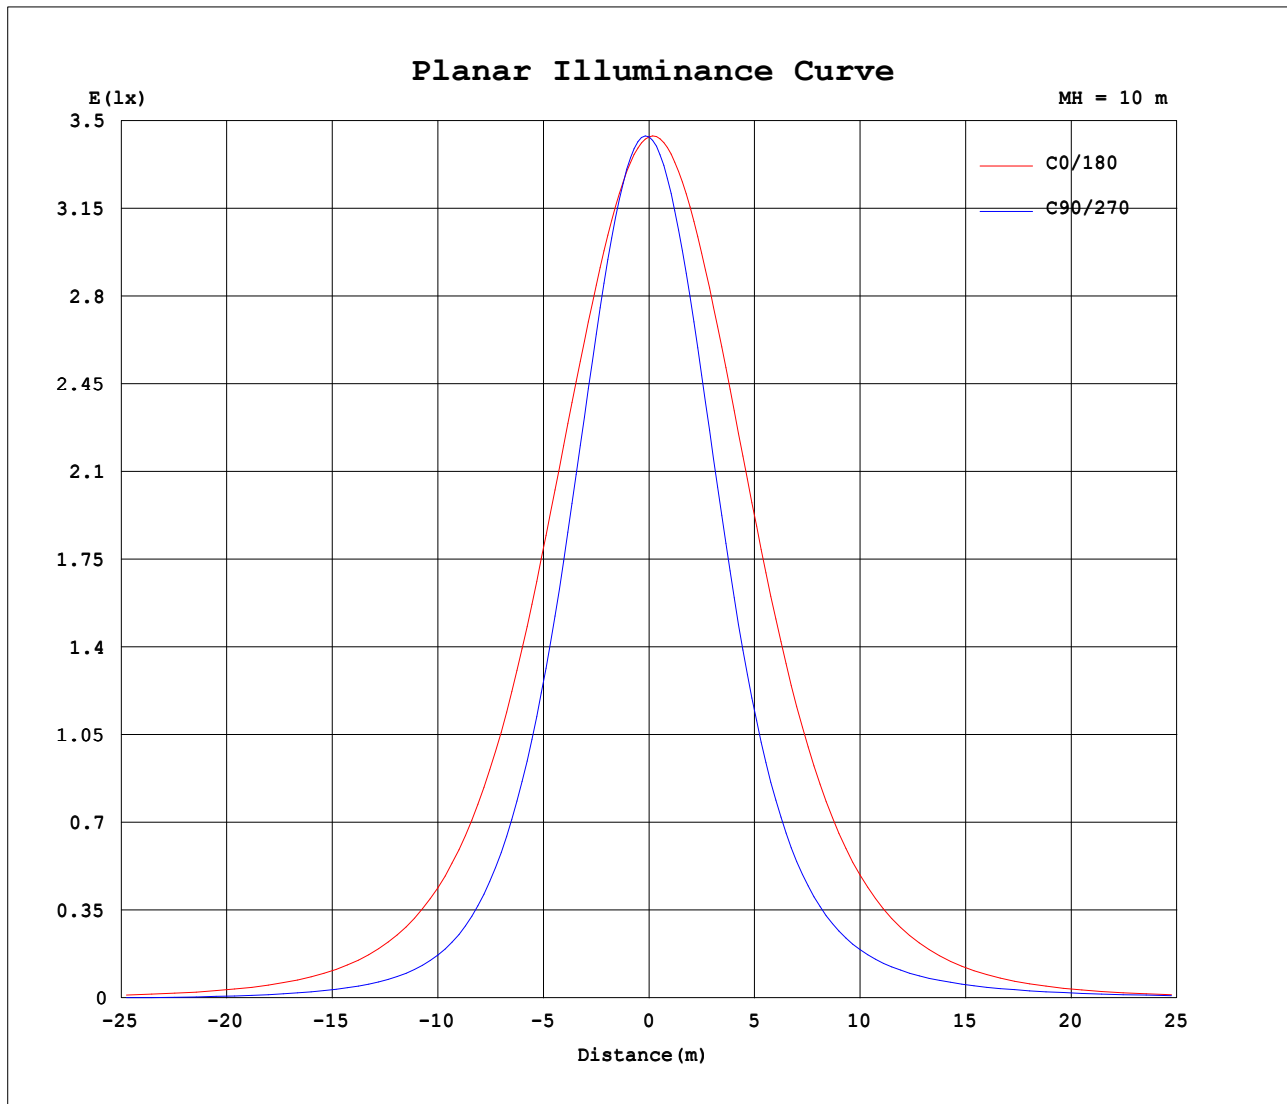


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-27

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.11V I:1.327A P:11.56W PF:0.7198 Freq:59.97Hz Lamp Flux:467.75x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot light CW	WEIGHT:
SPEC.:12W 2700K 60°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:FLOOD-LIGHT SHROUD

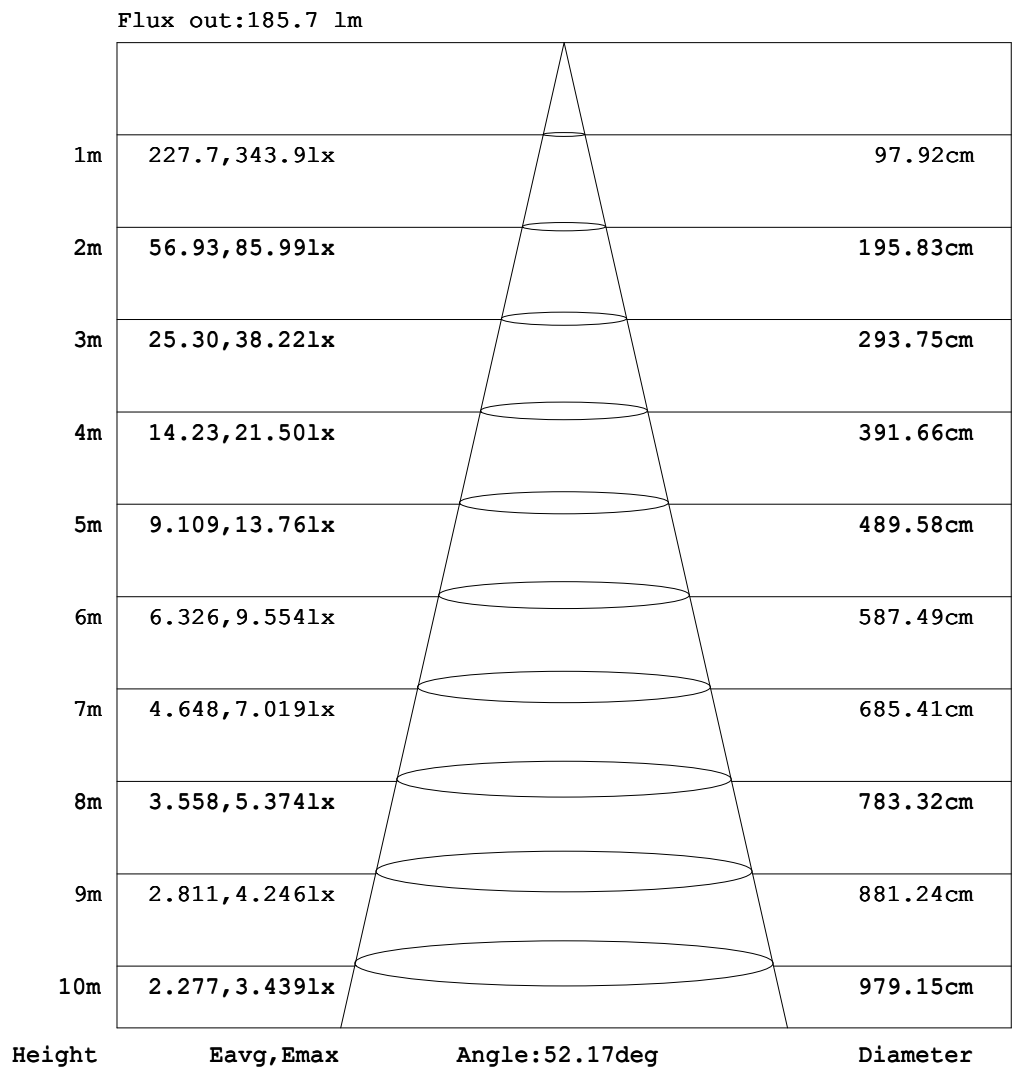

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-27

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.11V I:1.327A P:11.56W PF:0.7198 Freq:59.97Hz Lamp Flux:467.75x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot light	CW WEIGHT:
SPEC.:12W 2700K 60°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:FLOOD-LIGHT SHROUD

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.12	0.29	0.48	0.72	0.98	1.26	1.55	1.85	2.15	2.45	2.76	3.04	3.27	3.47	3.61
-170	0.00	0.00	0.00	0.00	0.12	0.27	0.45	0.67	0.93	1.20	1.48	1.77	2.07	2.37	2.66	2.93	3.17	3.34	3.42
-160	0.00	0.00	0.00	0.00	0.09	0.23	0.39	0.59	0.80	1.03	1.29	1.55	1.81	2.07	2.32	2.55	2.73	2.86	2.93
-150	0.00	0.00	0.00	0.00	0.06	0.17	0.30	0.45	0.63	0.81	1.01	1.22	1.42	1.62	1.80	1.97	2.09	2.18	2.22
-140	0.00	0.00	0.00	0.00	0.01	0.09	0.20	0.31	0.43	0.57	0.70	0.84	0.98	1.11	1.23	1.33	1.41	1.45	1.46
-130	0.00	0.00	0.00	0.00	0.00	0.02	0.09	0.18	0.25	0.33	0.42	0.50	0.58	0.66	0.72	0.77	0.80	0.82	0.82
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.09	0.14	0.19	0.24	0.28	0.31	0.34	0.37	0.38	0.39	0.38
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.06	0.08	0.09	0.10	0.11	0.11	0.12
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.10	0.16	0.24	0.30	0.34	0.35	0.34	0.29	0.21	0.11	0.00
-70	0.00	0.00	0.00	0.01	0.19	0.62	1.28	2.18	3.11	3.92	4.67	5.16	5.37	5.34	5.08	4.59	3.88	2.98	1.94
-60	0.00	0.00	0.00	0.39	1.51	3.51	5.96	8.48	10.9	13.2	15.3	17.1	18.5	19.3	19.5	18.9	17.7	15.8	13.4
-50	0.00	0.00	0.17	1.45	4.47	8.55	13.0	17.9	23.1	28.4	33.4	37.7	41.1	43.2	43.9	43.2	41.0	37.4	32.6
-40	0.00	0.00	0.50	3.23	8.34	14.6	21.9	30.3	39.5	48.9	58.1	66.4	73.7	79.5	83.4	85.0	84.0	79.9	72.6
-30	0.00	0.00	0.96	5.30	12.3	21.1	31.9	44.5	58.5	73.5	88.9	104	119	133	144	152	156	154	146
-20	0.00	0.00	1.46	7.23	16.0	27.3	41.5	58.6	78.1	99.8	123	147	172	194	214	229	239	243	238
-10	0.00	0.00	1.84	8.68	18.8	32.2	49.4	70.4	95.2	123	154	186	218	246	271	291	307	317	318
0	0.00	0.00	2.00	9.36	20.3	35.0	53.9	77.7	106	139	175	212	247	278	303	322	336	343	344
10	0.00	0.03	1.98	9.02	19.4	33.0	50.2	71.3	96.1	124	154	185	215	243	266	284	298	306	303
20	0.00	0.06	1.72	7.88	17.1	28.8	43.2	60.4	80.0	102	124	147	170	190	206	219	227	227	219
30	0.00	0.07	1.31	6.16	13.9	23.3	34.5	47.4	61.5	76.6	91.8	107	120	132	141	146	147	143	133
40	0.00	0.08	0.89	4.18	10.1	17.2	25.4	34.3	43.8	53.4	62.7	71.1	78.2	83.6	86.9	87.7	85.7	80.8	73.3
50	0.00	0.07	0.54	2.37	6.19	11.2	16.8	22.6	28.6	34.4	39.8	44.4	48.0	50.5	51.5	51.1	49.3	46.2	41.9
60	0.00	0.05	0.31	1.16	2.94	5.82	9.33	13.0	16.6	20.0	23.0	25.7	27.8	29.2	30.0	30.0	29.5	28.3	26.8
70	0.00	0.03	0.19	0.52	1.17	2.20	3.61	5.38	7.32	9.24	11.0	12.6	14.0	15.1	15.9	16.5	16.8	16.8	16.7
80	0.00	0.01	0.07	0.20	0.41	0.69	1.04	1.51	2.03	2.61	3.24	3.88	4.52	5.14	5.73	6.26	6.73	7.14	7.48
90	0.00	0.00	0.01	0.01	0.02	0.02	0.03	0.03	0.03	0.04	0.04	0.05	0.05	0.06	0.06	0.06	0.07	0.07	0.08
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.02	0.02	0.02	0.01	0.01	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.05	0.08	0.10	0.11	0.11	0.11	0.10	0.08	0.06	0.03	0.00
130	0.00	0.00	0.00	0.00	0.00	0.01	0.07	0.13	0.17	0.21	0.24	0.32	0.35	0.39	0.43	0.43	0.44	0.43	0.40
140	0.00	0.00	0.00	0.00	0.00	0.08	0.16	0.23	0.31	0.45	0.52	0.64	0.77	0.85	0.93	0.99	1.01	1.05	1.03
150	0.00	0.00	0.00	0.00	0.05	0.15	0.25	0.37	0.53	0.68	0.87	1.04	1.21	1.38	1.52	1.64	1.74	1.78	1.77
160	0.00	0.00	0.00	0.00	0.08	0.21	0.34	0.54	0.72	0.95	1.18	1.42	1.65	1.88	2.11	2.28	2.45	2.53	2.55
170	0.00	0.00	0.00	0.00	0.11	0.26	0.43	0.64	0.89	1.15	1.42	1.70	1.98	2.27	2.55	2.80	3.02	3.16	3.19
180	0.00	0.00	0.00	0.00	0.12	0.29	0.48	0.72	0.98	1.26	1.55	1.85	2.15	2.45	2.76	3.04	3.27	3.47	3.59

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-27

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.11V I:1.327A P:11.56W PF:0.7198 Freq:59.97Hz Lamp Flux:467.75x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Aluminum Spot light	CW WEIGHT:
SPEC.:12W 2700K 60°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:FLOOD-LIGHT SHROUD

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	3.54	3.46	3.32	3.08	2.88	2.61	2.37	2.09	1.78	1.45	1.16	0.87	0.61	0.39	0.16	0.02	0.00	0.00	
-170	3.40	3.29	3.14	2.94	2.71	2.49	2.20	1.91	1.64	1.34	1.06	0.80	0.59	0.35	0.15	0.02	0.00	0.00	
-160	2.92	2.85	2.73	2.56	2.38	2.15	1.92	1.66	1.41	1.16	0.92	0.69	0.54	0.29	0.12	0.01	0.00	0.00	
-150	2.24	2.20	2.12	2.01	1.87	1.70	1.53	1.32	1.15	0.93	0.75	0.56	0.39	0.26	0.11	0.00	0.00	0.00	
-140	1.50	1.50	1.46	1.39	1.31	1.20	1.08	0.96	0.82	0.69	0.54	0.43	0.26	0.15	0.06	0.00	0.00	0.00	
-130	0.86	0.87	0.87	0.84	0.81	0.75	0.68	0.61	0.55	0.47	0.35	0.25	0.17	0.10	0.01	0.00	0.00	0.00	
-120	0.41	0.43	0.43	0.43	0.43	0.40	0.39	0.34	0.29	0.22	0.19	0.11	0.09	0.01	0.00	0.00	0.00	0.00	
-110	0.13	0.14	0.14	0.14	0.15	0.14	0.13	0.10	0.07	0.07	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.13	0.25	0.35	0.42	0.45	0.46	0.42	0.37	0.29	0.22	0.14	0.08	0.02	0.00	0.00	0.00	0.00	0.00	
-70	2.91	3.75	4.42	4.89	5.15	5.20	5.04	4.60	3.96	3.24	2.39	1.53	0.85	0.38	0.11	0.00	0.00	0.00	
-60	15.5	17.1	18.1	18.5	18.2	17.4	16.0	14.3	12.4	10.4	8.24	5.95	3.73	1.81	0.63	0.10	0.00	0.00	
-50	36.6	39.5	41.0	41.3	40.3	38.2	34.9	30.9	26.3	21.5	16.8	12.4	8.39	4.66	1.77	0.36	0.00	0.00	
-40	78.4	81.2	81.1	78.5	74.1	68.1	61.0	53.2	44.8	36.3	28.0	20.4	13.9	8.23	3.52	0.76	0.00	0.00	
-30	152	152	146	137	124	110	95.6	80.9	66.8	53.3	40.7	29.4	19.7	11.9	5.49	1.27	0.04	0.00	
-20	240	234	221	204	183	159	135	112	90.2	70.6	53.2	37.9	25.3	15.2	7.29	1.81	0.08	0.00	
-10	314	300	281	258	232	202	171	140	111	85.6	63.6	45.0	29.7	17.8	8.61	2.20	0.11	0.00	
0	337	325	308	286	260	228	193	158	125	95.1	69.9	49.0	32.1	19.2	9.25	2.37	0.12	0.00	
10	302	291	274	253	228	200	170	140	112	86.5	64.5	45.8	30.5	18.4	8.96	2.35	0.14	0.00	
20	224	221	212	197	178	158	135	113	92.0	72.5	55.0	39.7	26.8	16.4	7.93	2.07	0.14	0.00	
30	140	143	140	133	124	111	97.9	83.9	69.8	56.3	43.6	32.0	22.0	13.4	6.35	1.63	0.11	0.00	
40	79.4	82.9	83.7	82.0	78.2	72.6	65.7	57.8	49.3	40.6	32.0	23.9	16.5	9.97	4.47	1.15	0.08	0.00	
50	45.4	47.8	49.0	48.9	47.6	45.1	41.6	37.3	32.3	27.0	21.5	16.2	11.1	6.38	2.68	0.74	0.07	0.00	
60	28.0	28.9	29.2	28.9	28.1	26.6	24.6	22.1	19.2	16.1	12.7	9.32	6.04	3.24	1.39	0.41	0.05	0.00	
70	16.7	16.6	16.3	15.7	14.9	13.8	12.5	11.0	9.28	7.46	5.59	3.86	2.43	1.36	0.62	0.19	0.03	0.00	
80	7.16	6.78	6.32	5.81	5.24	4.63	4.00	3.36	2.74	2.15	1.60	1.12	0.71	0.41	0.20	0.07	0.01	0.00	
90	0.07	0.07	0.06	0.06	0.06	0.05	0.05	0.04	0.04	0.03	0.03	0.03	0.02	0.02	0.01	0.01	0.00	0.00	
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
110	0.02	0.04	0.06	0.07	0.09	0.10	0.10	0.08	0.06	0.07	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
120	0.06	0.11	0.15	0.19	0.23	0.24	0.26	0.25	0.22	0.18	0.17	0.10	0.09	0.01	0.00	0.00	0.00	0.00	
130	0.47	0.51	0.53	0.56	0.54	0.52	0.50	0.44	0.42	0.39	0.30	0.22	0.16	0.10	0.01	0.00	0.00	0.00	
140	1.09	1.10	1.12	1.09	1.05	0.99	0.88	0.79	0.70	0.57	0.47	0.39	0.25	0.15	0.06	0.00	0.00	0.00	
150	1.83	1.85	1.79	1.73	1.63	1.49	1.35	1.19	1.02	0.83	0.67	0.52	0.37	0.26	0.11	0.00	0.00	0.00	
160	2.58	2.56	2.46	2.35	2.19	1.99	1.79	1.55	1.33	1.09	0.87	0.65	0.52	0.28	0.12	0.01	0.00	0.00	
170	3.22	3.14	3.01	2.82	2.61	2.40	2.13	1.85	1.59	1.30	1.03	0.78	0.58	0.35	0.15	0.02	0.00	0.00	
180	3.54	3.46	3.32	3.08	2.88	2.61	2.37	2.09	1.78	1.45	1.16	0.87	0.61	0.39	0.16	0.02	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-09-27

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: