

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		1913.6 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	65.1V x 60.2H
	At 50% of Imax	39.6V x 39.1H
	At 90% of Imax	20.0V x 18.9H
Beam Flux	Total	1000.3 lumens per klm.
	To 10% of Imax	860.9 lumens per klm.
	To 50% of Imax	575.3 lumens per klm.
	To 90% of Imax	189.8 lumens per klm.
	Upward LOR	1.4 %
	Downward LOR	98.6 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.18V I:1.090A P:9.594W PF:0.7227 Freq:59.97Hz Lamp Flux:255.29x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight RGBWW	WEIGHT:
SPEC.:10W GREEN 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWNLIGHT SHROUD

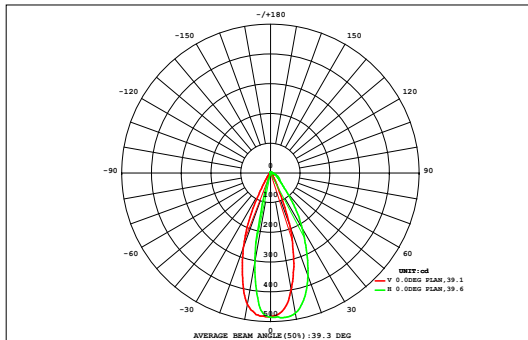

DATA OF LAMP		Eff:26.61lm/W	
MODEL	D9B2-10W-A	Imax (cd)	488.5
NOMINAL POWER (W)	10	AVAILABILITY (%)	84.0
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	214.5
NOMINAL FLUX (lm)	255.29	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	255.3
TEST VOLTAGE (V)	12	θ @50% (H,V)	39,40DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.08	0.11	0.14	0.19	0.24	0.31	0.39	0.46	0.52	0.52	0.45	0.38	0.30	0.23	0.18	0.14	0.10	0.07	4.81	2.49
45	0.08	0.11	0.14	0.19	0.24	0.31	0.39	0.46	0.52	0.52	0.45	0.38	0.30	0.23	0.18	0.14	0.10	0.07	4.81	2.49
40	0.08	0.12	0.17	0.24	0.33	0.46	0.60	0.74	0.85	0.84	0.72	0.58	0.44	0.31	0.22	0.16	0.11	0.08	7.04	5.39
35	0.09	0.13	0.20	0.31	0.48	0.69	0.92	1.13	1.31	1.30	1.11	0.88	0.65	0.45	0.29	0.18	0.12	0.08	10.3	9.07
30	0.10	0.15	0.25	0.42	0.66	0.96	1.28	1.59	1.81	1.78	1.52	1.21	0.89	0.61	0.38	0.22	0.13	0.08	14.1	13.0
25	0.10	0.17	0.31	0.54	0.86	1.29	1.75	2.14	2.41	2.36	2.00	1.55	1.12	0.76	0.47	0.27	0.14	0.08	18.3	17.5
20	0.10	0.19	0.36	0.64	1.09	1.68	2.24	2.69	2.99	2.94	2.55	2.00	1.36	0.87	0.53	0.29	0.15	0.08	22.8	22.0
15	0.10	0.20	0.38	0.73	1.34	2.03	2.66	3.15	3.43	3.38	2.98	2.40	1.66	0.96	0.54	0.29	0.15	0.07	26.5	25.7
10	0.10	0.19	0.38	0.80	1.51	2.25	2.94	3.44	3.65	3.60	3.25	2.63	1.87	1.01	0.51	0.26	0.13	0.06	28.6	27.9
5	0.08	0.16	0.34	0.80	1.56	2.33	3.07	3.53	3.68	3.64	3.33	2.68	1.87	0.98	0.42	0.20	0.09	0.04	28.8	28.1
0	0.07	0.14	0.29	0.71	1.40	2.10	2.82	3.35	3.58	3.54	3.15	2.44	1.65	0.83	0.34	0.15	0.06	0.03	26.7	25.9
-5	0.06	0.12	0.24	0.55	1.09	1.62	2.16	2.71	2.93	2.88	2.52	1.84	1.23	0.59	0.26	0.12	0.05	0.03	21.0	20.2
-10	0.05	0.09	0.18	0.37	0.74	1.09	1.38	1.61	1.68	1.63	1.44	1.13	0.72	0.36	0.18	0.09	0.04	0.02	12.8	11.9
-15	0.04	0.07	0.12	0.22	0.42	0.65	0.75	0.75	0.59	0.54	0.61	0.50	0.33	0.20	0.11	0.06	0.03	0.02	6.01	4.60
-20	0.03	0.05	0.08	0.13	0.21	0.32	0.38	0.31	0.13	0.08	0.17	0.18	0.15	0.11	0.07	0.04	0.02	0.01	2.47	0.49
-25	0.02	0.04	0.05	0.08	0.11	0.14	0.15	0.13	0.05	0.02	0.06	0.08	0.07	0.05	0.04	0.02	0.02	0.01	1.14	0.00
-30	0.02	0.02	0.03	0.05	0.06	0.07	0.07	0.05	0.02	0.01	0.02	0.03	0.03	0.03	0.02	0.01	0.01	0.01	0.56	0.00
-35	0.01	0.02	0.02	0.03	0.03	0.03	0.03	0.02	0.01	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.30	0.00
-40	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.01	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.18	0.00
-45	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.01	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.18	0.00
	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)	10	15	20	25	30	35	40	45			
Φ t	1.15	1.98	3.58	6.82	12.2	18.0	23.6	27.8	29.7	29.1	25.9	20.5	14.4	8.37	4.57	2.52	1.38	0.80	232	---
Φ a	0.00	0.00	1.50	5.52	11.2	17.3	23.1	27.4	29.4	28.9	25.6	20.0	13.6	7.35	3.04	0.39	0.00	0.00	---	214

one-half-peak spread: U:13.9,D:22.9 , L:17.4,R:19.0


NEMA Beam Type: Type 4

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.18V I:1.090A P:9.594W PF:0.7227 Freq:59.97Hz Lamp Flux:255.29x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight RGBWW	WEIGHT:
SPEC.:10W GREEN 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWNLIGHT SHROUD

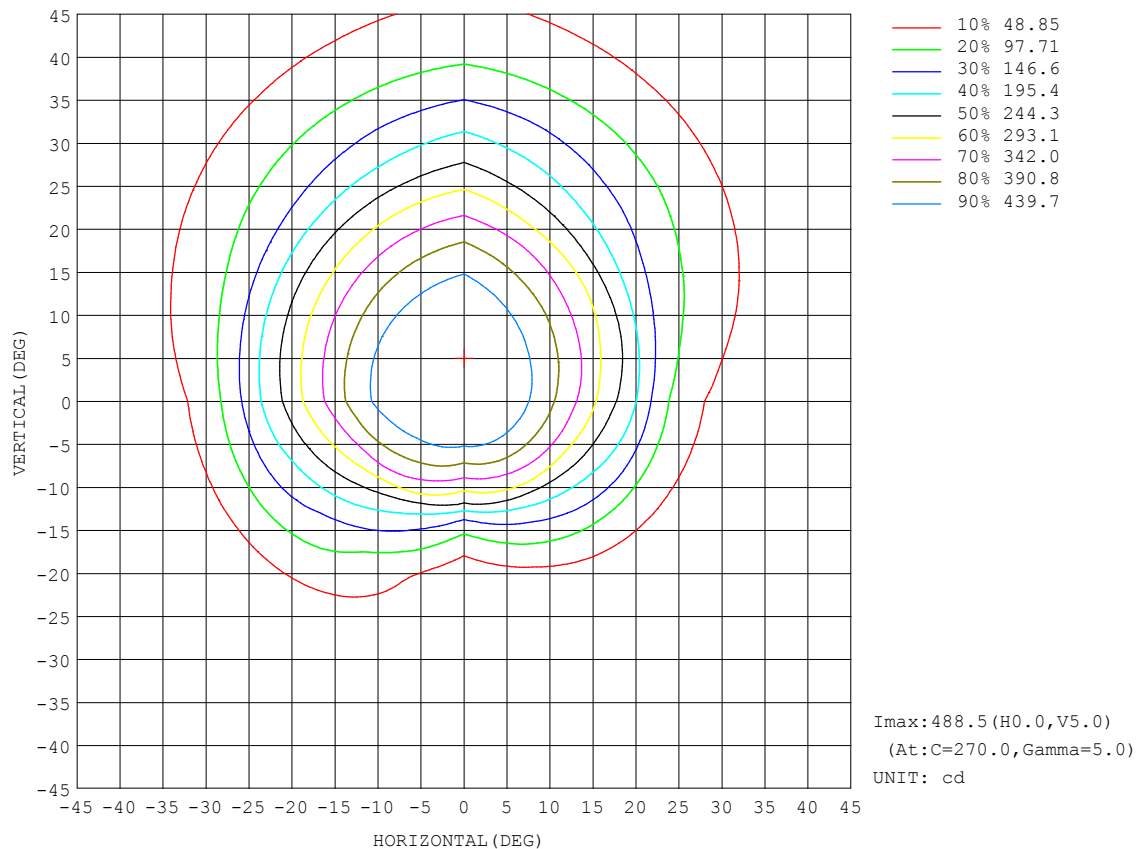


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.18V I:1.090A P:9.594W PF:0.7227 Freq:59.97Hz Lamp Flux:255.29x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight RGBWW	WEIGHT:
SPEC.:10W GREEN 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWNLIGHT SHROUD

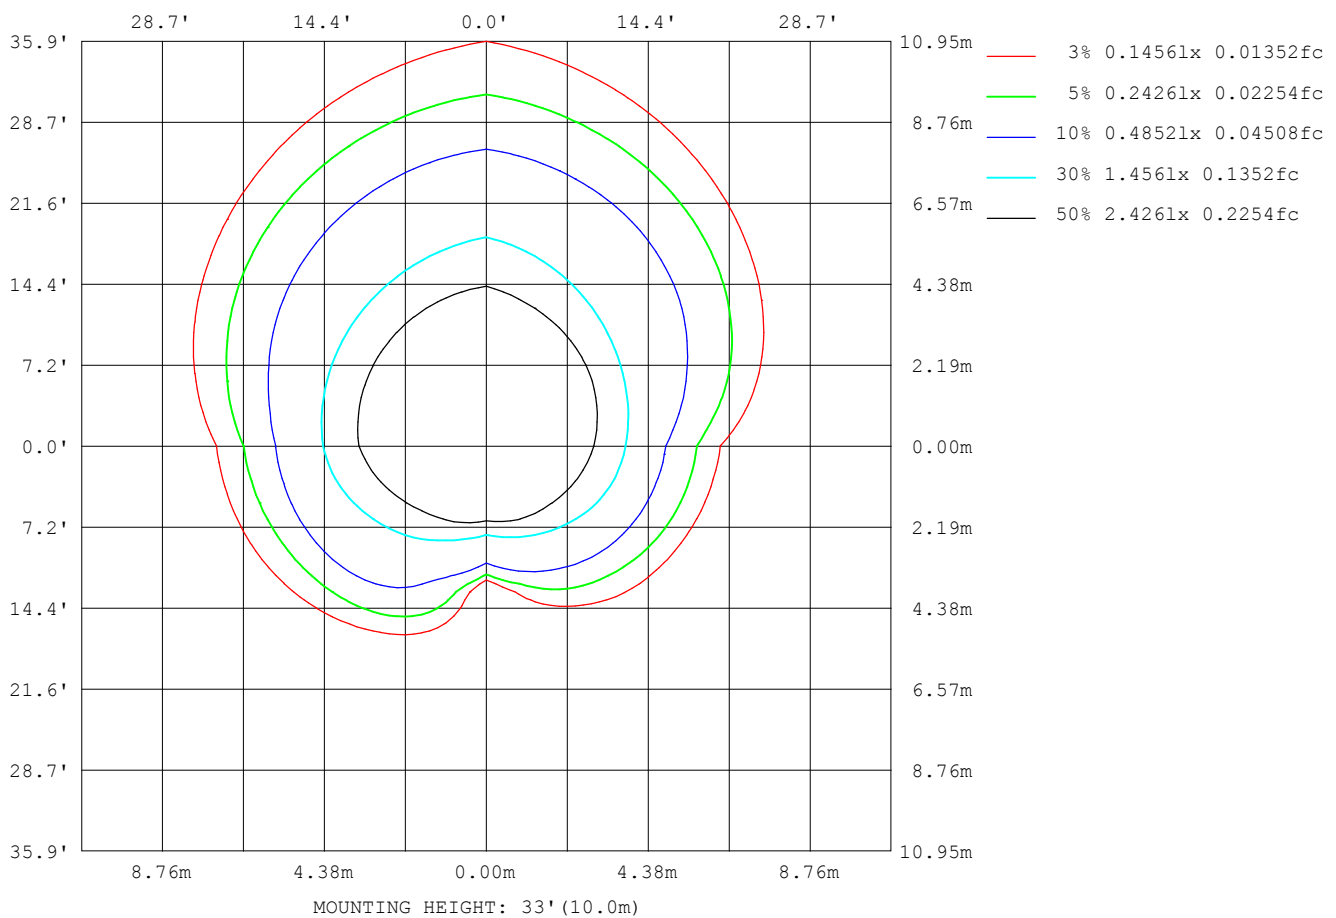

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

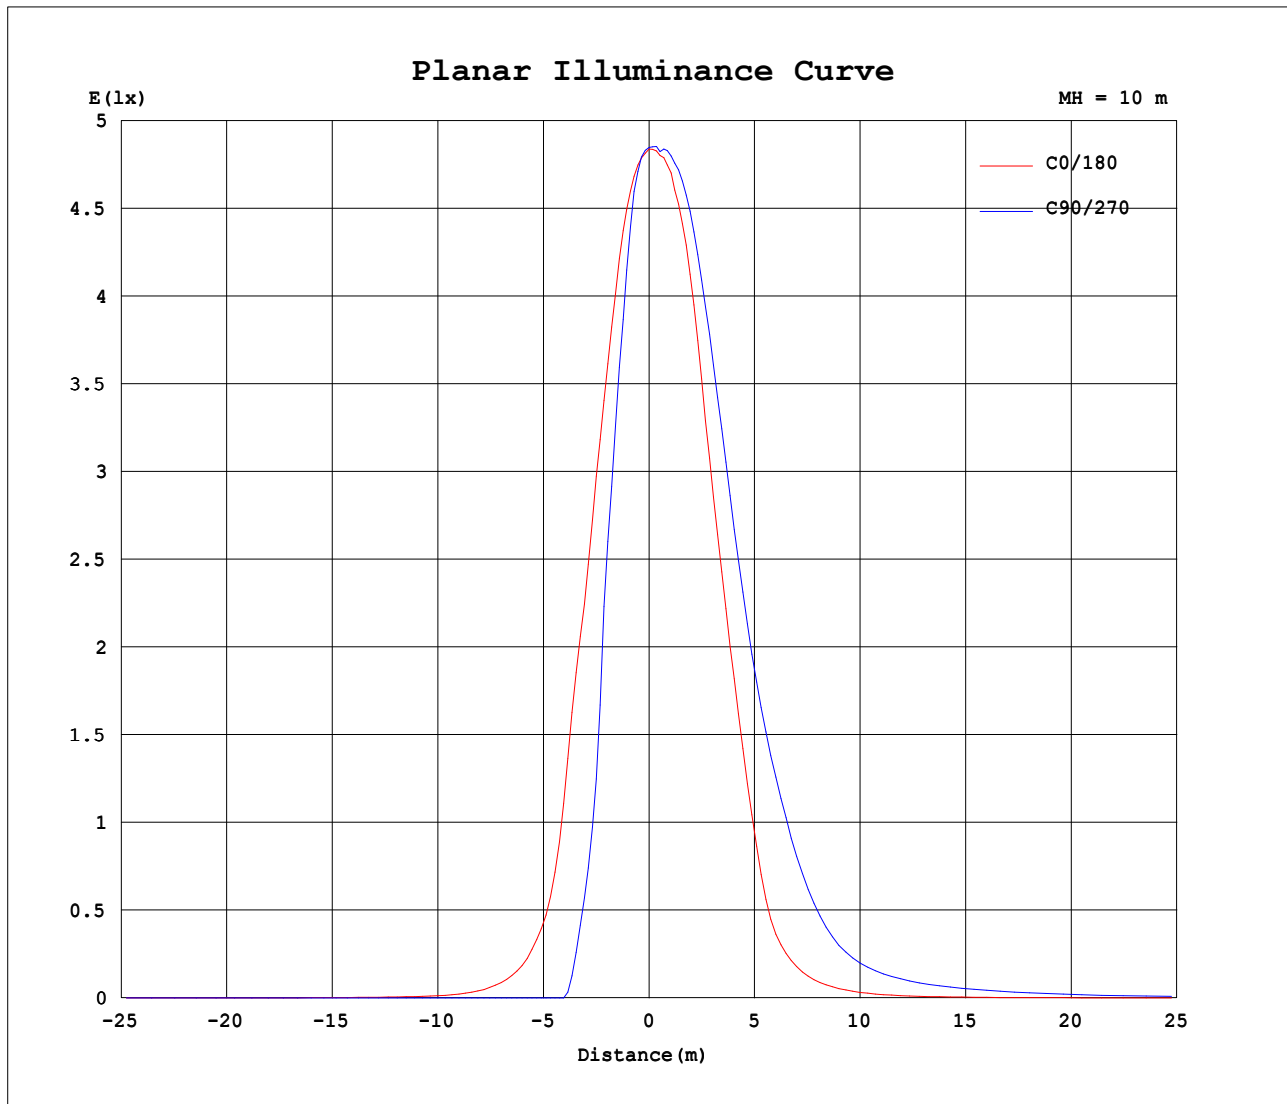


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.18V I:1.090A P:9.594W PF:0.7227 Freq:59.97Hz Lamp Flux:255.29x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight RGBWW	WEIGHT:
SPEC.:10W GREEN 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:DOWNLIGHT SHROUD

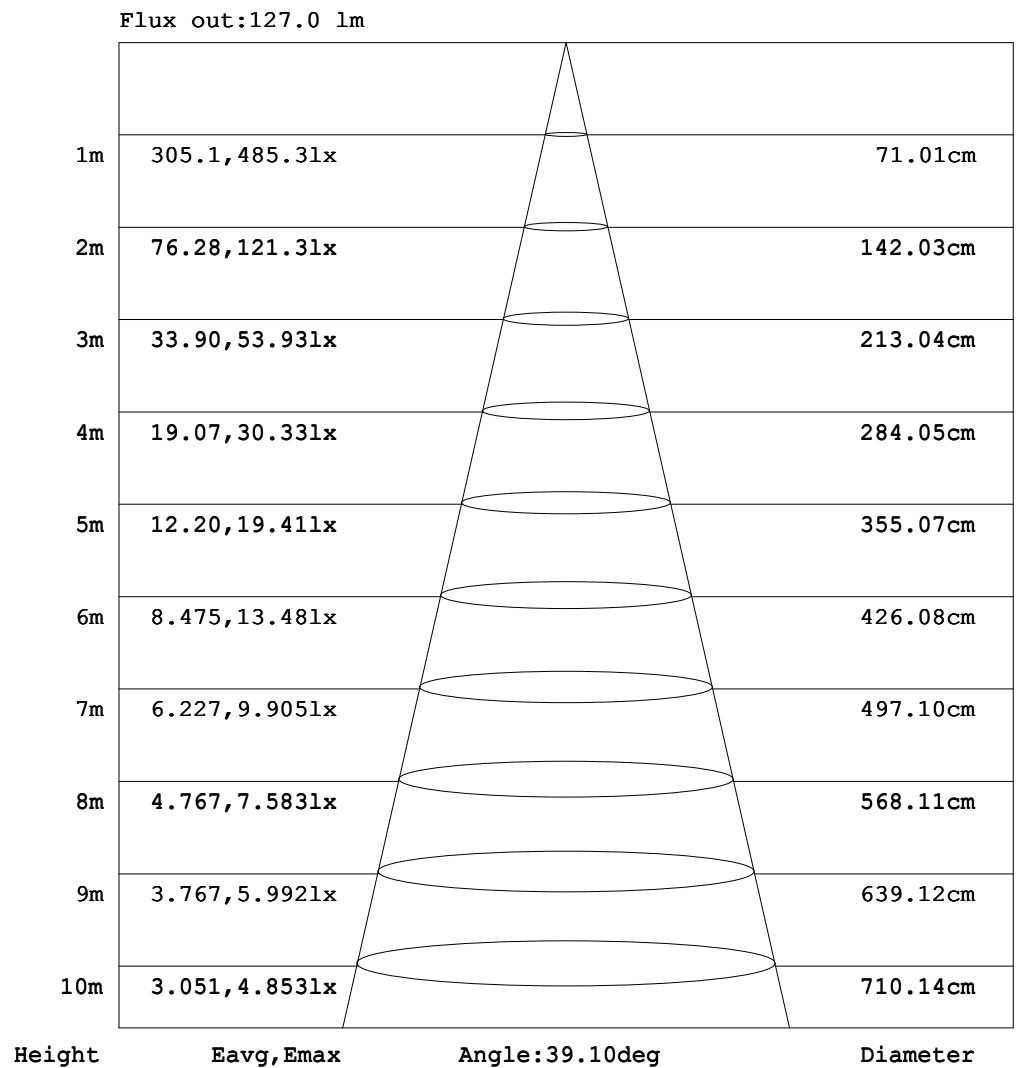

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.18V I:1.090A P:9.594W PF:0.7227 Freq:59.97Hz Lamp Flux:255.29x1 lm									
NAME: LED LANDSCAPE LIGHT					TYPE:Copper Spotlight RGBWW WEIGHT:				
SPEC.:10W GREEN 40°LENS					DIM.:			SERIAL No.:1	
MFR.: EVERFINE					SUR.:			Shielding Angle:DOWNLIGHT SHROUD	

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.27	0.60	0.98	1.33	1.59	1.82	2.00	2.17	2.28
-170	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.05	0.09	0.15	0.41	0.78	1.20	1.61	1.95	2.20	2.39	2.56	2.73
-160	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.08	0.14	0.24	0.43	0.76	1.16	1.58	1.99	2.35	2.64	2.90	3.16
-150	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.08	0.15	0.25	0.39	0.59	0.90	1.25	1.61	1.96	2.27	2.55	2.78
-140	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.07	0.12	0.19	0.30	0.44	0.61	0.80	1.04	1.29	1.52	1.73	1.89
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.07	0.11	0.18	0.26	0.35	0.45	0.58	0.70	0.82	0.92	1.01
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.07	0.10	0.15	0.18	0.24	0.28	0.33	0.36	0.39
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.03	0.04	0.06	0.07	0.08
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.04	0.04	0.04	0.03	0.02	0.02	0.01	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.08	0.10	0.15	0.19	0.23	0.27	0.26	0.26	0.23	0.20	0.16	0.12	0.06	0.00
-60	0.00	0.00	0.00	0.04	0.11	0.23	0.36	0.45	0.52	0.59	0.63	0.65	0.65	0.61	0.53	0.43	0.30	0.15	0.00
-50	0.00	0.00	0.00	0.12	0.28	0.47	0.63	0.81	0.98	1.15	1.24	1.31	1.32	1.29	1.18	1.00	0.73	0.39	0.00
-40	0.00	0.00	0.06	0.22	0.49	0.71	1.00	1.32	1.60	1.90	2.21	2.56	2.96	3.28	3.45	3.22	2.52	1.40	0.00
-30	0.00	0.00	0.12	0.32	0.65	0.99	1.43	1.88	2.41	3.10	4.18	5.74	7.74	9.90	12.1	13.1	11.6	7.16	0.00
-20	0.00	0.00	0.13	0.43	0.79	1.26	1.83	2.50	3.44	5.07	7.93	12.4	20.0	31.6	53.3	71.3	67.6	48.0	15.3
-10	0.00	0.00	0.14	0.53	0.95	1.50	2.19	3.10	4.59	7.46	12.9	23.0	43.9	97.8	160	213	260	318	305
0	0.00	0.00	0.14	0.57	1.03	1.64	2.43	3.51	5.45	9.26	16.7	32.8	69.2	164	267	365	449	480	484
10	0.00	0.03	0.25	0.80	1.55	2.58	3.91	5.58	8.26	13.3	23.4	43.3	79.9	156	253	341	415	461	479
20	0.00	0.06	0.33	0.94	1.88	3.23	4.97	7.03	9.85	14.6	23.1	39.3	67.6	109	169	238	298	342	368
30	0.00	0.09	0.38	0.98	2.02	3.51	5.46	7.71	10.4	14.0	19.6	28.5	43.1	66.0	96.1	131	163	192	213
40	0.00	0.11	0.37	0.94	1.91	3.30	5.19	7.52	10.1	13.0	16.5	21.0	27.0	34.8	44.8	56.7	69.6	81.4	89.7
50	0.00	0.12	0.32	0.81	1.58	2.72	4.29	6.28	8.58	11.2	13.9	16.8	19.9	23.4	27.0	31.0	34.8	38.4	41.3
60	0.00	0.13	0.32	0.65	1.18	1.97	3.02	4.36	6.03	7.98	10.1	12.3	14.7	17.1	19.4	21.7	23.8	25.7	27.4
70	0.00	0.13	0.30	0.52	0.82	1.29	1.84	2.56	3.40	4.35	5.47	6.68	8.01	9.39	10.7	12.1	13.3	14.4	15.3
80	0.00	0.13	0.27	0.44	0.63	0.85	1.09	1.36	1.67	2.00	2.39	2.78	3.20	3.62	4.06	4.49	4.89	5.26	5.59
90	0.00	0.12	0.24	0.36	0.48	0.60	0.72	0.84	0.96	1.08	1.20	1.32	1.44	1.55	1.67	1.79	1.91	2.03	2.15
100	0.00	0.11	0.21	0.30	0.38	0.45	0.52	0.57	0.62	0.67	0.71	0.75	0.79	0.83	0.87	0.92	0.96	1.02	1.07
110	0.00	0.10	0.18	0.25	0.29	0.32	0.34	0.36	0.36	0.33	0.30	0.27	0.24	0.21	0.19	0.17	0.16	0.16	0.16
120	0.00	0.09	0.15	0.19	0.21	0.22	0.19	0.15	0.10	0.06	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.08	0.12	0.14	0.15	0.11	0.07	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.06	0.09	0.10	0.08	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.03	0.02	0.00
150	0.00	0.05	0.07	0.07	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.02	0.10	0.18	0.23	0.23	0.26	0.26	0.18
160	0.00	0.03	0.04	0.04	0.02	0.00	0.00	0.00	0.00	0.00	0.05	0.20	0.37	0.55	0.76	0.94	1.08	1.15	1.10
170	0.00	0.02	0.02	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.17	0.43	0.72	1.03	1.32	1.55	1.70	1.78	1.80
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.27	0.60	0.98	1.33	1.59	1.82	2.00	2.17	2.27

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.18V I:1.090A P:9.594W PF:0.7227 Freq:59.97Hz Lamp Flux:255.29x1 lm																		
NAME: LED LANDSCAPE LIGHT									TYPE:Copper Spotlight RGBWW WEIGHT:									
SPEC.:10W GREEN 40°LENS									DIM.:					SERIAL No.:1				
MFR.: EVERFINE									SUR.:					Shielding Angle:DOWNLIGHT SHROUD				

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	2.41	2.41	2.35	2.29	2.10	1.79	1.37	0.93	0.59	0.26	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-170	2.69	2.67	2.59	2.50	2.21	1.84	1.41	0.99	0.58	0.26	0.05	0.02	0.01	0.00	0.00	0.00	0.00	0.00	
-160	3.02	2.87	2.67	2.41	2.05	1.66	1.24	0.85	0.49	0.26	0.08	0.04	0.02	0.00	0.00	0.00	0.00	0.00	
-150	2.64	2.44	2.20	1.92	1.59	1.25	0.93	0.60	0.35	0.15	0.08	0.04	0.01	0.00	0.00	0.00	0.00	0.00	
-140	1.79	1.63	1.44	1.22	0.99	0.76	0.52	0.32	0.19	0.12	0.07	0.03	0.01	0.00	0.00	0.00	0.00	0.00	
-130	0.94	0.85	0.73	0.62	0.46	0.35	0.26	0.18	0.11	0.07	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.36	0.33	0.28	0.24	0.18	0.15	0.10	0.07	0.04	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.07	0.06	0.04	0.03	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.01	0.02	0.03	0.04	0.03	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.07	0.14	0.20	0.24	0.26	0.27	0.24	0.21	0.15	0.09	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	0.19	0.36	0.51	0.61	0.68	0.70	0.67	0.59	0.49	0.37	0.24	0.11	0.00	0.00	0.00	0.00	0.00	0.00	
-40	0.62	1.09	1.35	1.42	1.42	1.37	1.29	1.16	0.99	0.77	0.55	0.32	0.13	0.00	0.00	0.00	0.00	0.00	
-30	3.61	5.94	6.61	6.03	4.60	3.30	2.41	1.94	1.60	1.27	0.91	0.58	0.28	0.05	0.00	0.00	0.00	0.00	
-20	35.9	40.3	34.2	25.3	16.1	9.93	5.55	3.27	2.34	1.78	1.30	0.84	0.44	0.14	0.00	0.00	0.00	0.00	
-10	302	229	170	95.0	44.6	22.4	11.4	5.55	3.21	2.29	1.64	1.05	0.57	0.20	0.00	0.00	0.00	0.00	
0	465	400	302	196	77.8	34.6	16.3	7.42	3.90	2.65	1.85	1.19	0.64	0.22	0.00	0.00	0.00	0.00	
10	445	384	298	189	103	58.4	31.7	16.1	9.03	5.96	4.12	2.76	1.66	0.80	0.28	0.11	0.03	0.00	
20	330	271	201	141	93.4	57.6	32.5	18.4	11.8	8.19	5.83	3.98	2.42	1.23	0.50	0.20	0.06	0.00	
30	189	158	124	90.0	60.7	38.7	25.1	17.3	12.5	9.25	6.74	4.61	2.80	1.41	0.66	0.27	0.09	0.00	
40	80.6	68.2	54.8	42.8	32.9	25.4	19.7	15.4	12.1	9.25	6.75	4.52	2.72	1.42	0.72	0.31	0.11	0.00	
50	38.2	34.5	30.5	26.5	22.7	19.3	16.1	13.3	10.5	7.97	5.71	3.77	2.25	1.30	0.69	0.32	0.12	0.00	
60	25.6	23.6	21.5	19.1	16.7	14.4	11.9	9.66	7.55	5.61	3.93	2.66	1.75	1.07	0.61	0.32	0.13	0.00	
70	14.3	13.2	11.9	10.6	9.19	7.77	6.43	5.20	4.12	3.20	2.41	1.74	1.21	0.82	0.52	0.30	0.13	0.00	
80	5.25	4.87	4.46	4.03	3.58	3.15	2.74	2.36	2.00	1.67	1.36	1.09	0.85	0.63	0.44	0.27	0.13	0.00	
90	2.03	1.91	1.79	1.67	1.55	1.44	1.32	1.20	1.08	0.96	0.84	0.72	0.60	0.48	0.36	0.24	0.12	0.00	
100	1.02	0.96	0.92	0.87	0.83	0.79	0.75	0.71	0.67	0.62	0.57	0.52	0.45	0.38	0.30	0.21	0.11	0.00	
110	0.16	0.16	0.17	0.19	0.21	0.24	0.27	0.30	0.33	0.36	0.36	0.34	0.32	0.29	0.25	0.18	0.10	0.00	
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.06	0.10	0.15	0.19	0.22	0.21	0.19	0.15	0.09	0.00	
130	0.02	0.03	0.03	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.02	0.07	0.11	0.15	0.14	0.12	0.08	0.00	
140	0.08	0.15	0.19	0.21	0.19	0.15	0.08	0.03	0.00	0.00	0.00	0.00	0.04	0.08	0.10	0.09	0.06	0.00	
150	0.34	0.43	0.47	0.53	0.52	0.45	0.36	0.21	0.10	0.00	0.00	0.00	0.01	0.04	0.07	0.07	0.05	0.00	
160	1.26	1.31	1.27	1.18	1.02	0.87	0.69	0.47	0.25	0.11	0.00	0.00	0.00	0.02	0.04	0.04	0.03	0.00	
170	1.91	1.97	1.95	1.86	1.64	1.37	1.06	0.75	0.43	0.17	0.00	0.00	0.00	0.01	0.02	0.02	0.02	0.00	
180	2.41	2.41	2.35	2.29	2.10	1.79	1.37	0.93	0.59	0.26	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: