

LumienCORE



N4B3-3W-27K-15-A
N4B3-3W-30K-15-A
N4B3-3W-27K-30-A
N4B3-3W-30K-30-A

Nano Knuckle
 IP68 Rated (waterproof)



SPECIFICATIONS

| Fixture Type | Fixture Components | Fixture Material | Fixture Style | Watts | Color Temperature | Beam Spread | Finish |
|--------------|------------------------|------------------|---------------|---------|----------------------------|-------------|--------------|
| N (Nano) | 4 (Integrated Modular) | B (Brass) | 3 (ML) | 3W (3W) | 27K (2700K) 30K (3000K) | 15° 30° | A (Antiqued) |

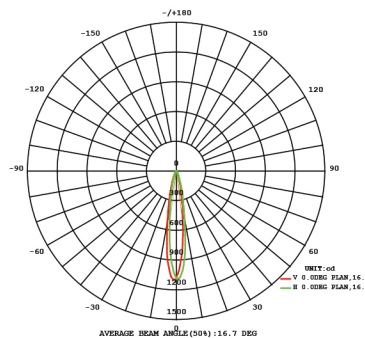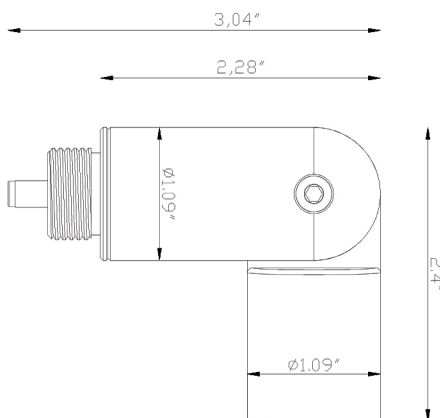

Construction: Brass
 Finish: Antique Brush
 Lead Wire: 6ft long
 Light Source: Modular LED
 Wattage: 3W
 Operating Voltage: 10-15V
 Lumens: 175 LM & 275 LM
 Beam Spread: 15° or 30°
 Color Temperature: 2700K, 3000K
 Volt Amps: 5.20
 RGB: No
 CRI: 80+
 Rated Life: 50,000 Hrs
 Dimmable: Primary Dimming Capable

ACCESSORIES



LAB-118



LAB-146



LAB-119



LAB-115

WARRANTY

Lifetime Warranty on the Housing,
 10 Year Warranty on the LED Light Source

CERTIFICATION

UL Listed I File #E501872

Lumien Lighting reserves the right to modify the design of our products at any time and data listed on spec sheets is subject to change.