

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity		2018.2 cd per klm.
(Luminaire orientation as tested.)		0.0 degrees vertical
		0.0 degrees horizontal
Beam Spread	At 10% of Imax	61.3V x 66.0H
	At 50% of Imax	39.5V x 40.5H
	At 90% of Imax	16.0V x 17.5H
Beam Flux	Total	1000.3 lumens per klm.
	To 10% of Imax	866.4 lumens per klm.
	To 50% of Imax	555.9 lumens per klm.
	To 90% of Imax	119.2 lumens per klm.
	Upward LOR	1.2 %
	Downward LOR	98.8 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:12.18V I:1.108A P:9.735W PF:0.7215 Freq:59.97Hz Lamp Flux:387.492x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight RGBWW	WEIGHT:
SPEC.:10W 2700K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:UPLIGHT SHROUD

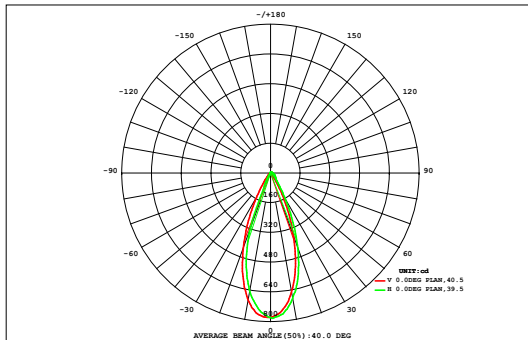

DATA OF LAMP		Eff:39.80lm/W	
MODEL	D9B1-10W-A	Imax (cd)	782.0
NOMINAL POWER (W)	10	AVAILABILITY (%)	86.2
RATED VOLTAGE (V)	12	Avai. FLUX (lm)	334.1
NOMINAL FLUX (lm)	387.492	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	387.5
TEST VOLTAGE (V)	12	θ @50% (H,V)	41,40DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.06	0.08	0.11	0.14	0.18	0.22	0.25	0.29	0.31	0.31	0.28	0.24	0.20	0.16	0.12	0.09	0.07	0.05	3.17	0.00
45	0.06	0.08	0.11	0.14	0.18	0.22	0.25	0.29	0.31	0.31	0.28	0.24	0.20	0.16	0.12	0.09	0.07	0.05	3.17	0.00
40	0.07	0.10	0.14	0.19	0.25	0.31	0.38	0.45	0.48	0.48	0.42	0.35	0.28	0.21	0.16	0.11	0.08	0.06	4.53	0.07
35	0.08	0.12	0.18	0.25	0.36	0.49	0.64	0.78	0.86	0.84	0.73	0.58	0.43	0.30	0.21	0.14	0.10	0.06	7.16	3.98
30	0.10	0.15	0.23	0.36	0.56	0.84	1.17	1.45	1.61	1.58	1.37	1.06	0.72	0.46	0.28	0.18	0.11	0.07	12.3	10.1
25	0.11	0.18	0.31	0.53	0.91	1.43	1.97	2.41	2.65	2.62	2.31	1.81	1.25	0.74	0.40	0.23	0.13	0.08	20.1	18.4
20	0.13	0.22	0.41	0.77	1.38	2.13	2.87	3.46	3.78	3.73	3.33	2.67	1.90	1.14	0.58	0.28	0.15	0.09	29.0	27.6
15	0.14	0.26	0.52	1.05	1.87	2.81	3.71	4.41	4.77	4.72	4.27	3.48	2.51	1.56	0.79	0.35	0.17	0.09	37.5	36.2
10	0.15	0.30	0.63	1.29	2.25	3.33	4.35	5.09	5.48	5.42	4.92	4.08	2.98	1.89	0.98	0.40	0.18	0.09	43.8	42.7
5	0.15	0.31	0.69	1.43	2.46	3.62	4.69	5.47	5.84	5.77	5.26	4.36	3.20	2.04	1.06	0.43	0.18	0.09	47.0	46.0
0	0.15	0.30	0.67	1.38	2.38	3.56	4.64	5.42	5.77	5.70	5.20	4.31	3.15	1.96	1.01	0.41	0.17	0.08	46.2	45.2
-5	0.13	0.26	0.56	1.15	2.00	3.15	4.18	4.93	5.27	5.22	4.76	3.91	2.80	1.64	0.83	0.34	0.15	0.07	41.4	40.3
-10	0.11	0.21	0.43	0.86	1.48	2.40	3.40	4.09	4.40	4.35	3.94	3.17	2.11	1.18	0.60	0.25	0.12	0.06	33.2	32.0
-15	0.09	0.16	0.30	0.58	0.99	1.48	2.23	2.91	3.20	3.15	2.78	2.03	1.24	0.75	0.38	0.18	0.09	0.05	22.6	21.1
-20	0.07	0.11	0.20	0.35	0.59	0.85	1.08	1.32	1.45	1.42	1.22	0.93	0.67	0.42	0.22	0.11	0.06	0.04	11.1	9.27
-25	0.05	0.08	0.12	0.20	0.32	0.45	0.56	0.59	0.53	0.51	0.52	0.45	0.33	0.21	0.12	0.07	0.04	0.03	5.18	1.28
-30	0.04	0.05	0.07	0.10	0.15	0.21	0.26	0.28	0.26	0.24	0.23	0.20	0.15	0.10	0.06	0.04	0.03	0.02	2.50	0.00
-35	0.03	0.04	0.05	0.06	0.07	0.09	0.10	0.10	0.09	0.08	0.08	0.07	0.05	0.04	0.03	0.02	0.02	0.01	1.03	0.00
-40	0.02	0.03	0.03	0.04	0.04	0.04	0.03	0.03	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.40	0.00
-45	0.02	0.03	0.03	0.04	0.04	0.04	0.03	0.03	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.01	0.01	0.01	0.40	0.00
	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)	10	15	20	25	30	35	40	45			
Φ t	1.67	2.97	5.64	10.7	18.2	27.4	36.5	43.5	46.8	46.2	41.6	33.7	24.0	14.8	7.85	3.65	1.85	1.03	368	---
Φ a	0.00	0.00	2.61	8.61	16.4	25.8	35.0	42.0	45.3	44.7	40.2	32.2	22.3	12.9	5.58	0.42	0.00	0.00	---	334

one-half-peak spread: U:19.4,D:20.4 , L:20.5,R:20.3


NEMA Beam Type: Type 4

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:12.18V I:1.108A P:9.735W PF:0.7215 Freq:59.97Hz Lamp Flux:387.492x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight RGBWW	WEIGHT:
SPEC.:10W 2700K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:UPLIGHT SHROUD

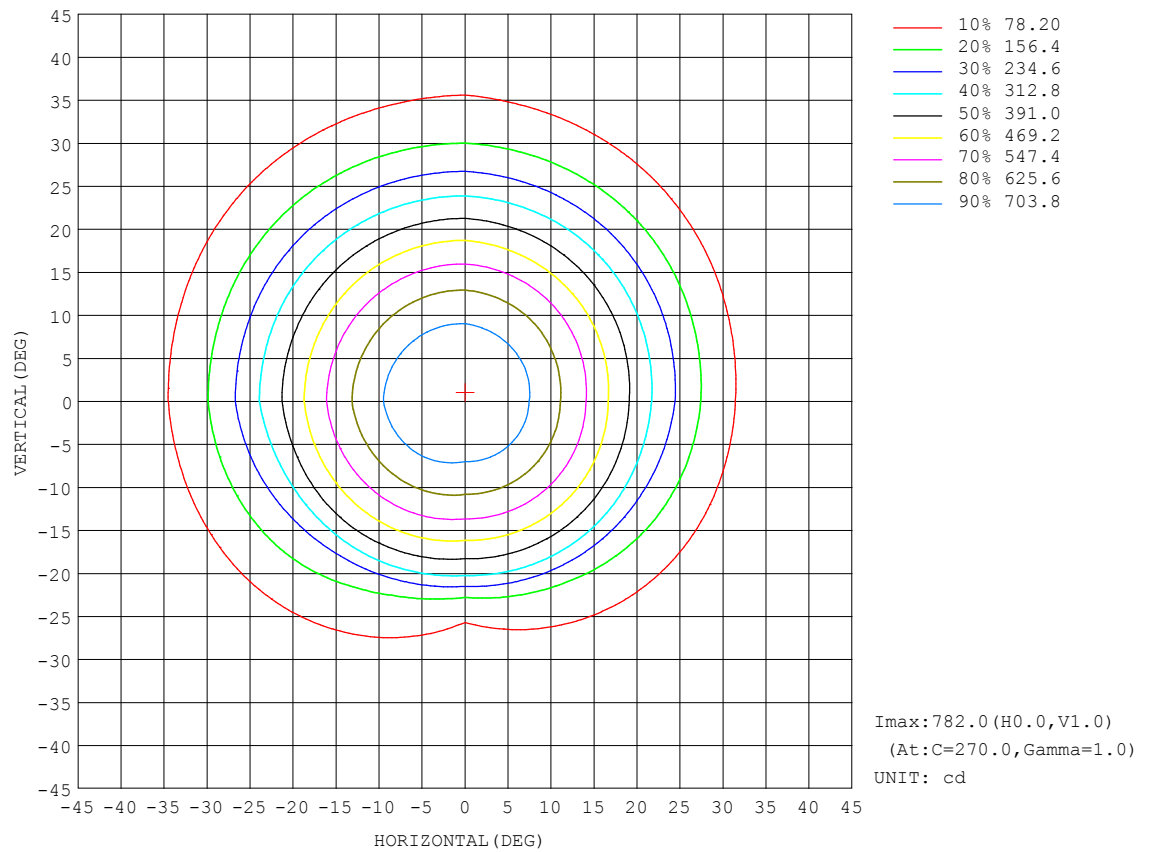


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:12.18V I:1.108A P:9.735W PF:0.7215 Freq:59.97Hz Lamp Flux:387.492x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight RGBWW	WEIGHT:
SPEC.:10W 2700K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:UPLIGHT SHROUD

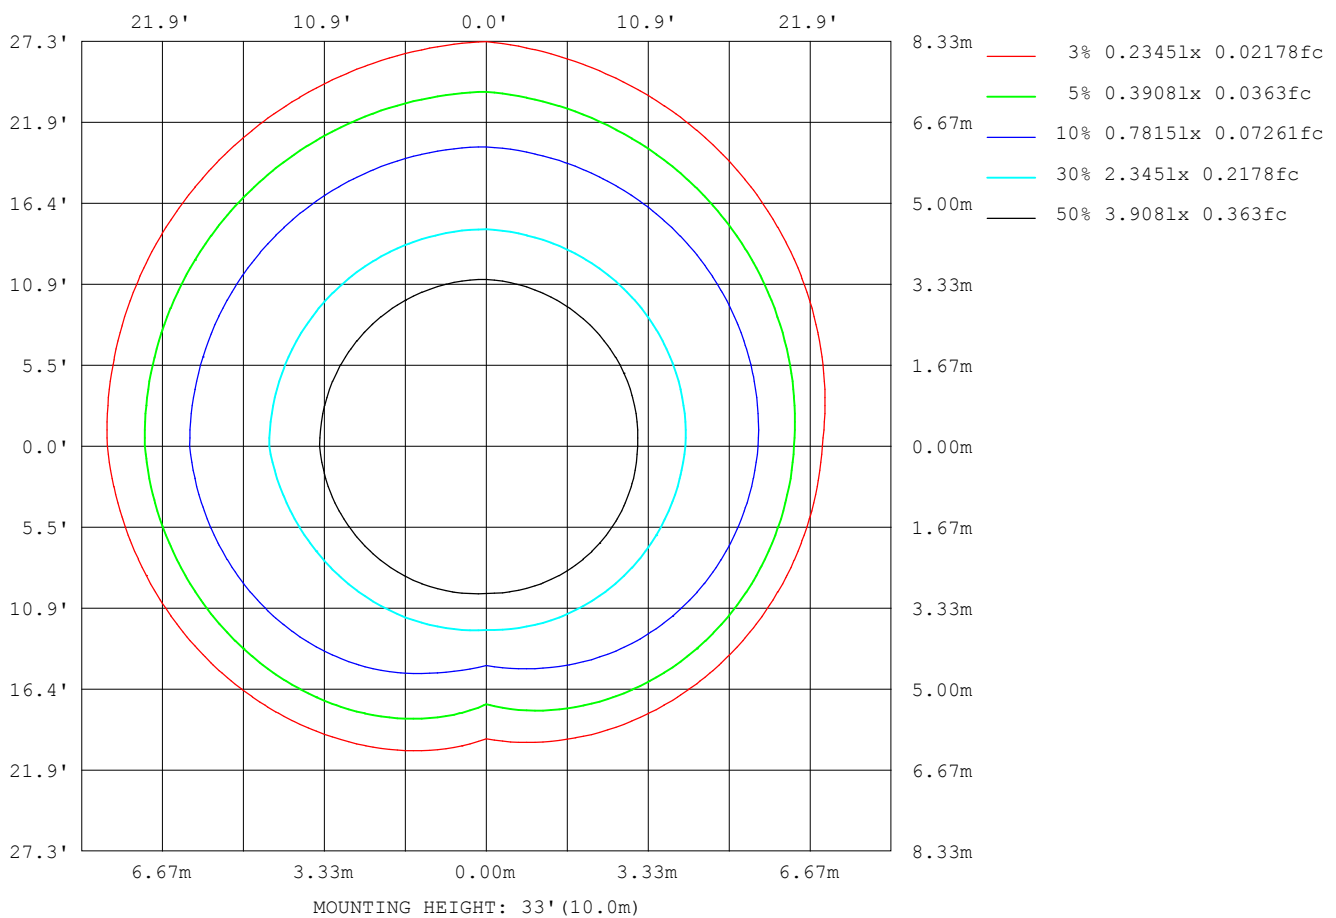

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

Planar Illuminance Curve

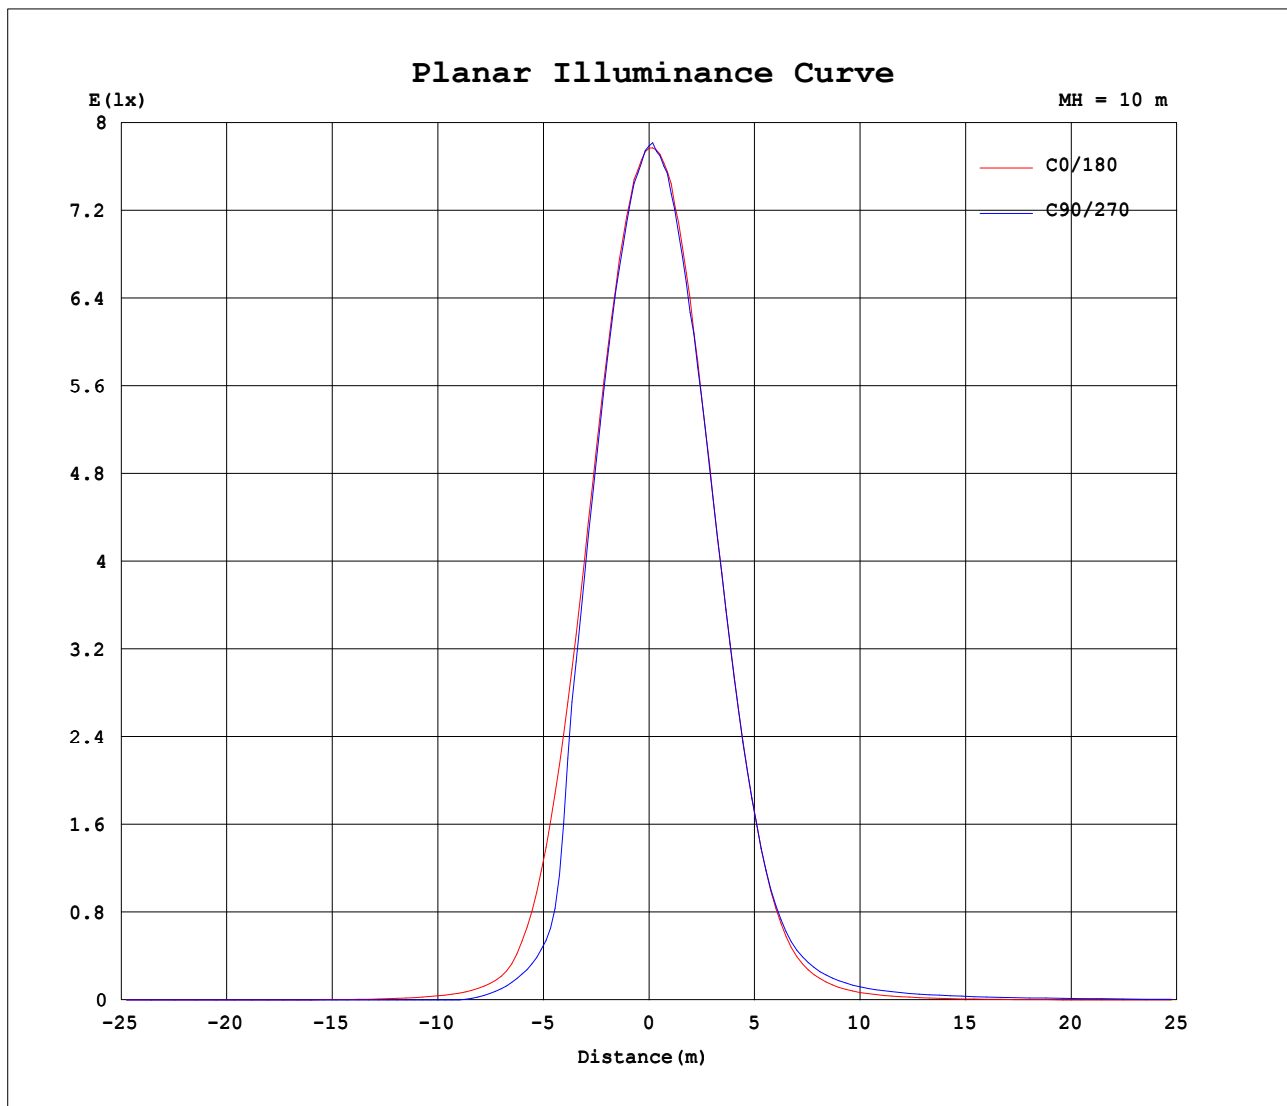


H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

AAI Figure

Test:U:12.18V I:1.108A P:9.735W PF:0.7215 Freq:59.97Hz Lamp Flux:387.492x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight RGBWW	WEIGHT:
SPEC.:10W 2700K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:UPLIGHT SHROUD

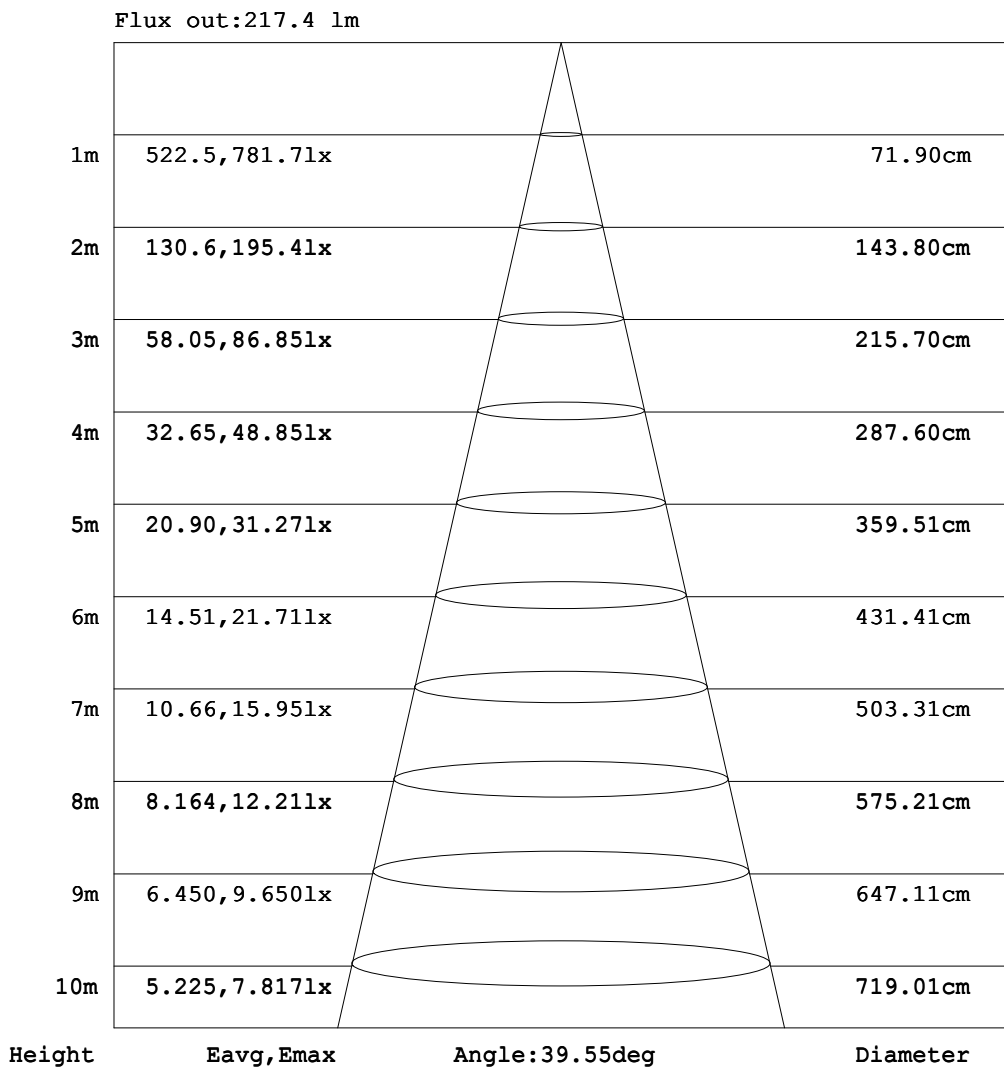

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.18V I:1.108A P:9.735W PF:0.7215 Freq:59.97Hz Lamp Flux:387.492x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight RGBWW	WEIGHT:
SPEC.:10W 2700K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:UPLIGHT SHROUD

Table--1

UNIT: cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.23	0.63	1.14	1.72	2.30	2.81	3.22	3.58	3.90	4.15
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.06	0.28	0.69	1.21	1.83	2.45	3.04	3.52	3.92	4.19	4.46
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.10	0.23	0.55	1.02	1.55	2.14	2.71	3.23	3.68	4.04	4.33
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.09	0.18	0.34	0.64	1.03	1.47	1.92	2.34	2.73	3.04	3.26
-140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.05	0.11	0.19	0.32	0.50	0.74	1.00	1.27	1.52	1.72	1.86
-130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.08	0.13	0.20	0.29	0.39	0.50	0.60	0.69	0.76
-120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.04	0.06	0.09	0.11	0.15	0.17	0.19
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.08	0.11	0.15	0.19	0.20	0.22	0.22	0.20	0.16	0.12	0.06	0.00
-60	0.00	0.00	0.00	0.00	0.03	0.12	0.24	0.36	0.50	0.64	0.77	0.87	0.92	0.90	0.82	0.69	0.49	0.26	0.00
-50	0.00	0.00	0.00	0.02	0.16	0.34	0.61	0.95	1.32	1.68	2.04	2.32	2.55	2.63	2.48	2.13	1.57	0.83	0.00
-40	0.00	0.00	0.00	0.12	0.35	0.70	1.22	1.89	2.64	3.51	4.55	5.51	6.42	7.07	7.33	7.04	6.62	5.62	3.30
-30	0.00	0.00	0.00	0.19	0.55	1.15	2.02	3.12	4.64	6.56	9.06	12.2	17.1	25.9	37.0	48.0	54.3	52.5	43.0
-20	0.00	0.00	0.01	0.28	0.77	1.61	2.82	4.60	7.21	11.0	16.8	28.4	50.0	86.6	132	174	240	313	328
-10	0.00	0.00	0.03	0.36	0.95	2.03	3.61	6.11	9.90	16.1	28.1	53.6	108	195	312	459	567	634	645
0	0.00	0.00	0.04	0.40	1.05	2.26	4.06	7.06	11.7	19.8	36.6	72.4	153	281	429	576	695	764	777
10	0.00	0.01	0.09	0.55	1.39	2.83	4.74	7.67	12.2	19.6	34.0	62.6	125	232	361	490	599	664	685
20	0.00	0.02	0.11	0.61	1.55	3.10	4.97	7.49	11.2	16.8	25.9	42.3	71.1	124	201	286	361	411	429
30	0.00	0.03	0.12	0.61	1.52	3.05	4.91	6.98	9.69	13.4	18.6	26.0	37.1	52.8	74.1	100	128	148	156
40	0.00	0.04	0.13	0.55	1.32	2.57	4.41	6.30	8.27	10.6	13.5	17.0	21.3	26.3	32.1	38.3	44.0	48.4	50.7
50	0.00	0.04	0.13	0.37	0.99	1.89	3.25	5.10	6.93	8.73	10.5	12.3	14.3	16.5	18.6	20.8	22.8	24.4	25.6
60	0.00	0.04	0.12	0.26	0.59	1.22	2.03	3.10	4.48	6.19	7.96	9.53	11.0	12.5	13.7	14.9	16.1	17.1	18.1
70	0.00	0.04	0.10	0.19	0.34	0.55	0.94	1.52	2.15	2.89	3.73	4.67	5.71	6.76	7.80	8.82	9.78	10.6	11.3
80	0.00	0.03	0.08	0.13	0.20	0.29	0.40	0.53	0.68	0.85	1.03	1.23	1.46	1.70	2.01	2.31	2.58	2.81	3.01
90	0.00	0.03	0.06	0.09	0.12	0.15	0.18	0.21	0.24	0.27	0.30	0.33	0.36	0.39	0.42	0.45	0.48	0.51	0.54
100	0.00	0.03	0.05	0.07	0.08	0.09	0.09	0.09	0.09	0.09	0.08	0.08	0.07	0.06	0.06	0.05	0.05	0.05	0.05
110	0.00	0.02	0.04	0.04	0.04	0.03	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.02	0.03	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.02	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.07	0.10	0.20	0.25	0.29	0.28
150	0.00	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.15	0.35	0.62	0.90	1.12	1.33	1.46	1.48
160	0.00	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.22	0.56	0.97	1.42	1.86	2.21	2.48	2.65	2.69
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.16	0.49	0.95	1.49	2.05	2.55	2.95	3.25	3.39	3.40
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.23	0.63	1.14	1.72	2.30	2.81	3.22	3.58	3.90	4.12

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:12.18V I:1.108A P:9.735W PF:0.7215 Freq:59.97Hz Lamp Flux:387.492x1 lm		
NAME: LED LANDSCAPE LIGHT	TYPE:Copper Spotlight RGBWW	WEIGHT:
SPEC.:10W 2700K 40°LENS	DIM.:	SERIAL No.:1
MFR.: EVERFINE	SUR.:	Shielding Angle:UPLIGHT SHROUD

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-180	4.27	4.27	4.19	3.96	3.55	2.98	2.29	1.64	1.03	0.59	0.18	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-170	4.42	4.40	4.23	3.90	3.42	2.84	2.17	1.52	0.95	0.50	0.18	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
-160	4.23	4.05	3.76	3.35	2.88	2.31	1.75	1.19	0.74	0.36	0.14	0.02	0.00	0.00	0.00	0.00	0.00	0.00	
-150	3.18	3.00	2.72	2.37	1.98	1.54	1.13	0.76	0.45	0.20	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
-140	1.80	1.68	1.50	1.28	1.03	0.80	0.55	0.36	0.18	0.05	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-130	0.73	0.67	0.59	0.48	0.38	0.27	0.15	0.08	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-120	0.17	0.15	0.11	0.09	0.06	0.04	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.01	0.02	0.03	0.03	0.03	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.08	0.15	0.20	0.22	0.23	0.23	0.20	0.17	0.13	0.08	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	0.41	0.76	1.00	1.12	1.11	0.99	0.81	0.62	0.44	0.30	0.20	0.10	0.00	0.00	0.00	0.00	0.00	0.00	
-40	4.24	4.15	3.94	4.02	3.82	3.30	2.64	1.95	1.30	0.80	0.47	0.27	0.11	0.00	0.00	0.00	0.00	0.00	
-30	47.1	44.3	35.2	24.8	16.0	9.60	6.67	4.66	3.03	1.81	0.96	0.49	0.24	0.04	0.00	0.00	0.00	0.00	
-20	302	220	148	102	59.0	30.0	16.0	9.24	5.66	3.26	1.69	0.78	0.37	0.12	0.00	0.00	0.00	0.00	
-10	619	541	419	265	148	69.8	30.2	15.5	8.69	4.81	2.44	1.09	0.47	0.17	0.00	0.00	0.00	0.00	
0	740	652	521	364	219	103	39.8	20.0	10.8	5.81	2.90	1.27	0.53	0.19	0.00	0.00	0.00	0.00	
10	650	572	450	315	185	87.3	39.3	21.3	12.2	7.09	4.01	2.23	1.27	0.61	0.19	0.06	0.01	0.00	
20	400	341	260	171	96.2	51.0	29.9	18.3	11.5	7.27	4.58	2.92	1.85	0.90	0.34	0.10	0.02	0.00	
30	143	118	87.6	61.9	42.8	29.6	20.4	14.2	9.86	6.85	4.82	3.39	2.15	1.01	0.42	0.12	0.03	0.00	
40	47.0	41.5	35.2	28.8	23.1	18.2	14.2	10.9	8.36	6.43	4.89	3.46	1.98	0.97	0.43	0.13	0.04	0.00	
50	24.0	22.0	19.7	17.3	15.0	12.7	10.8	9.04	7.49	5.91	4.35	2.73	1.55	0.83	0.35	0.13	0.04	0.00	
60	16.9	15.7	14.5	13.1	11.8	10.3	8.86	7.36	5.68	4.05	2.77	1.79	1.09	0.56	0.26	0.12	0.04	0.00	
70	10.6	9.68	8.69	7.63	6.57	5.51	4.47	3.54	2.74	2.04	1.44	0.92	0.55	0.34	0.19	0.10	0.04	0.00	
80	2.81	2.58	2.31	2.01	1.70	1.46	1.23	1.03	0.85	0.68	0.53	0.40	0.29	0.20	0.13	0.08	0.03	0.00	
90	0.51	0.48	0.45	0.42	0.39	0.36	0.33	0.30	0.27	0.24	0.21	0.18	0.15	0.12	0.09	0.06	0.03	0.00	
100	0.05	0.05	0.05	0.06	0.06	0.07	0.08	0.08	0.09	0.09	0.09	0.09	0.09	0.09	0.08	0.07	0.05	0.03	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.03	0.04	0.04	0.04	0.02	0.00	
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.03	0.02	0.00	
130	0.04	0.07	0.09	0.09	0.09	0.06	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.02	0.00	
140	0.37	0.41	0.43	0.38	0.36	0.32	0.23	0.16	0.08	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.00	
150	1.60	1.60	1.51	1.35	1.13	0.87	0.64	0.45	0.28	0.11	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.00	
160	2.84	2.85	2.74	2.51	2.16	1.73	1.29	0.86	0.55	0.26	0.09	0.00	0.00	0.00	0.00	0.00	0.01	0.00	
170	3.62	3.73	3.66	3.41	3.02	2.51	1.91	1.32	0.82	0.44	0.15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
180	4.27	4.27	4.19	3.96	3.55	2.98	2.29	1.64	1.03	0.59	0.18	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 0.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ADMIN
Test Date:2023-08-18

V(B) Range:-180 - 180DEG
V(B) Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.352
Humidity:65.0%
Test Distance:13.563m [K=1.0000]
Remarks: